

IS 3360 DALI-2 Input Device - concealed, rd.

neva
lux**PRESENCE DETECTOR**

EAN 4007841057268

E-Nr. 535946705

 **steinel**

124 x 65 mm



IS 3360 DALI-2 Input Device - concealed, rd.

PRESENCE DETECTOR

EAN 4007841057268
E-Nr. 535946705

Technical Data

IDENTIFICATION			Radial range	Ø 8 m (50 m²)	With remote control	No
Version			Tangential range	Ø 40 m (1257 m²)	Twilight setting teach	No
Motion and Presence Detector			Switching zones	1416 switching zones	HOUSING & MATERIAL	
DIMENSIONS			Mounting height	2,5 – 4,00 m	Protection class (IP)	IP20
Dimensions L x W x H			Presence range	Ø 3 m (7 m²)	Ambient temperature	from -20 up to 50 °C
Dimensions Ø x H			Optimal mounting height	2,8 m	Mounting location	ceiling
ELECTRICAL			CONNECTIVITY		Application location	Indoors
Mains connection			Networking	Yes	Mounting type	Concealed wiring
Supply voltage detail			Type of networking	Master/slave	Material	Plastic
Switching output 1 potential-free			Networking via	DALI bus	Application room	Indoors WC / washroom changing room function room / ancillary room multi-storey / underground car park production facilities reception / lobby recreation room sports hall stairwell warehouse
Control output DALI			Number of DALI participants	3	Colour	white
SENSOR TECHNOLOGY			With bus coupler	Yes	RAL colour	9003
Max. mounting height			LIGHTING TECHNOLOGY		SCOPE OF DELIVERY & WARRANTY	
Sensor technology			Soft light start	No	Manufacturer warranty	5 years
With motion detector			Constant light regulation	No	Corner wall bracket included	No
Detection angle			SETTINGS		CERTIFICATES & EPREL	
Opening angle			Twilight switch	Yes	Certificates	DALI-2
Sneak-under protection			Twilight setting	2 – 1000 lx		
Segment-by-segment masking			Base light function	No		
Electronic scalability			Main light adjustable	No		
Mechanical scalability			Settings via	Bus		


IS 3360 DALI-2 Input Device - concealed, rd.

PRESENCE DETECTOR

EAN 4007841057268
E-Nr. 535946705

Illustrations

TECHNICAL DRAWINGS

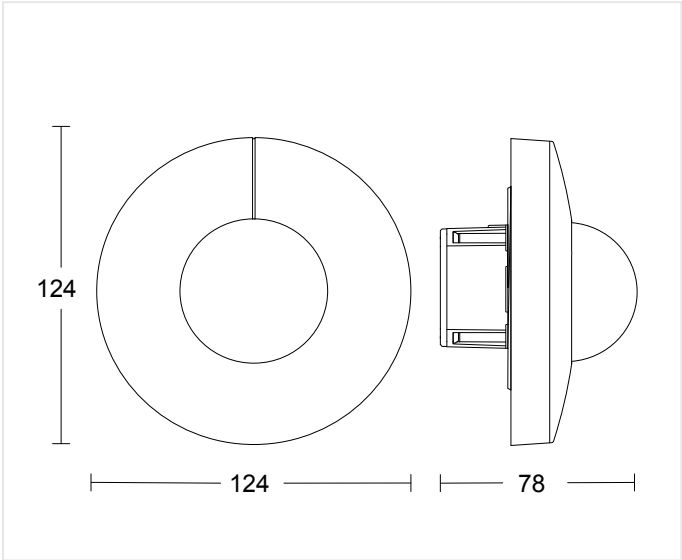

124 x 65 mm

MOUNTING HEIGHT

2,5 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
-------------------------	------------------	---------------


IS 3360 DALI-2 Input Device - concealed, rd.

PRESENCE DETECTOR

EAN 4007841057268
E-Nr. 535946705

Wiring Diagrams

WIRING DIAGRAM 1

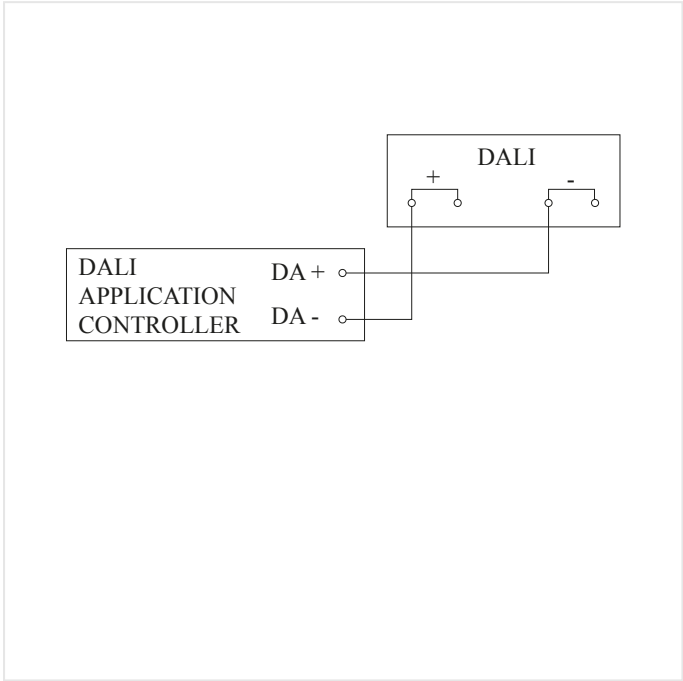

Circuit diagram

IS 3360 DALI-2 Input Device - concealed, rd.

PRESENCE DETECTOR

EAN 4007841057268

E-Nr. 535946705

Highlights




UV-resistant plastic

IS 3360 DALI-2 Input Device - concealed, rd.

PRESENCE DETECTOR

EAN 4007841057268
E-Nr. 535946705

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841056728	Schwarze Blende für IR-Sensoren Unterputz eckig	Accessory
 4007841056742	Schwarze Blende für IR-Sensoren Unterputz rund	Accessory
 4007841009151	Smart Remote	Accessory

ORDERING INFORMATION

Art.-Nr.

057268

EAN

4007841057268

E-Number

535946705

Typ

IS 3360 DALI-2 Input Device - concealed, rd.

nevalux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss