

RS PRO P2 S Neutral white

SENSOR-SWITCHED LED INDOOR LIGHT

neva
lux

EAN 4007841056070

E-Nr. 941000199

 **steinel**

320 x 110 mm



RS PRO P2 S Neutral white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841056070

E-Nr. 941000199

Technical Data

DIMENSIONS		CONNECTIVITY		Base light function time		10/30 min, all night
Dimensions Ø × H		Networking	Yes	Main light adjustable		No
ELECTRICAL		Networking via		Base light function in percent		10 %
Mains connection		Cable		Base light function percent from		10 %
Power		LIGHTING TECHNOLOGY		HOUSING & MATERIAL		
LED lamps > 8 W		Measured luminous flux 360°		Impact resistance		IK03
Capacitive load in µF		Colour temperature		Protection class (IP)		IP54
Switching output 1 number of LED/fluorescent lamps		4000 K		Protection class		II
SENSOR TECHNOLOGY		With illuminant		Ambient temperature		from -10 up to 40 °C
Max. mounting height		Yes, STEINEL LED system		Housing material		Plastic
Sensor technology		LED cannot be replaced		Cover material		Plastic, opal
With motion detector		Base		Mounting location		ceiling wall
Detection angle		Passive Thermo Control		Colour		white
Electronic scalability		LED lifetime max. °C		SCOPE OF DELIVERY & WARRANTY		
Mechanical scalability		LED lifetime L70B50 25°C		Manufacturer warranty		5 years
Radial range		Luminous flux decline per LM80		CERTIFICATES & EPREL		
Tangential range		L80B10		Certificates		DEKRA
Mounting height		SETTINGS		EPREL category		Surrounded product with integrated light source
Optimal mounting height		Twilight setting				
		Time setting				
		Base light function				
		Yes				


RS PRO P2 S Neutral white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841056070
E-Nr. 941000199

Illustrations

TECHNICAL DRAWINGS

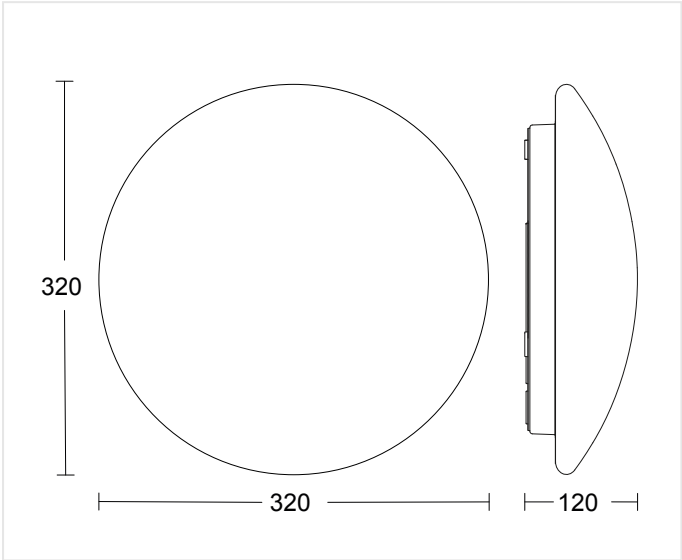

320 x 110 mm

MOUNTING HEIGHT

2 – 4 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------	------------------	---------------

RS PRO P2 S Neutral white


SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841056070

E-Nr. 941000199


Wiring Diagrams

WIRING DIAGRAM 1

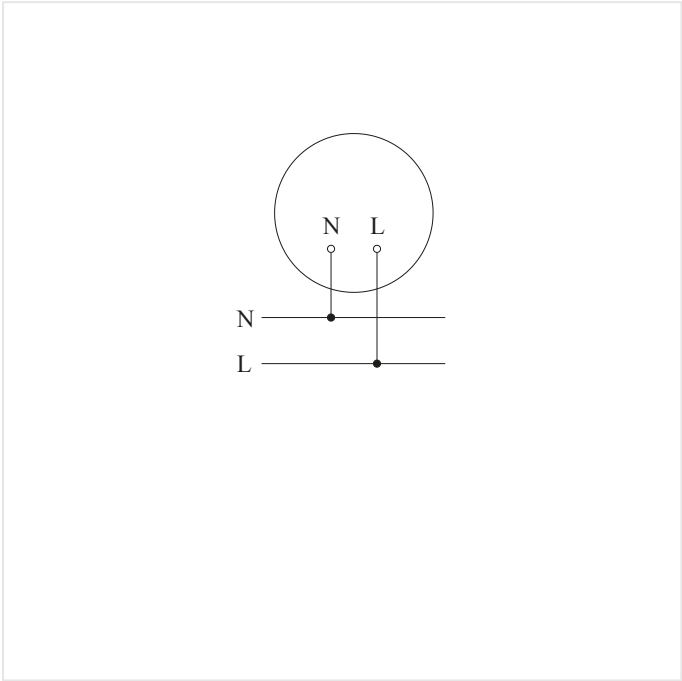

Master circuit diagram

WIRING DIAGRAM 2

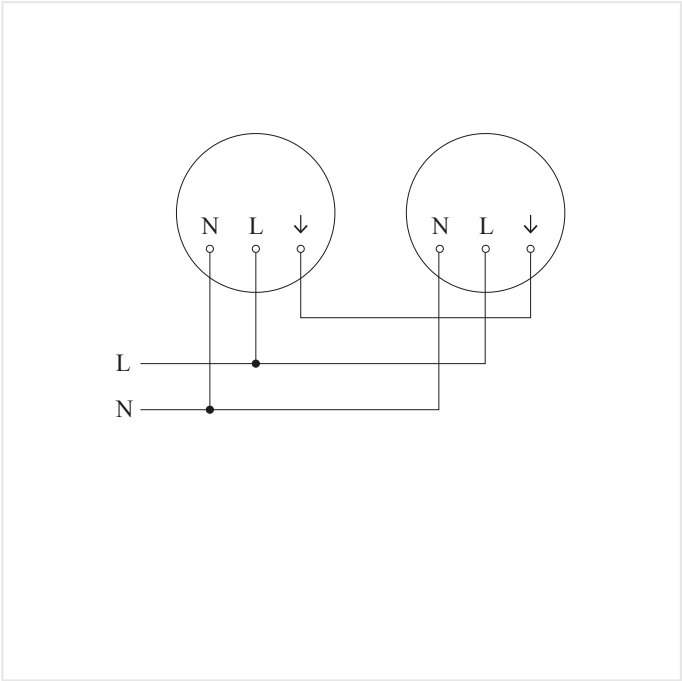

Master/master interconnection circuit diagram

RS PRO P2 S Neutral white

SENSOR-SWITCHED LED INDOOR LIGHT


EAN 4007841056070

E-Nr. 941000199

Highlights



Including STEINEL LED system

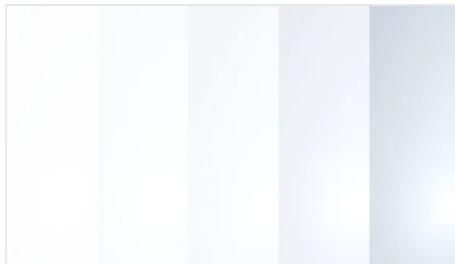

Intelligent soft light start



Interconnectable by cable (maximum of 10 units)



Optional basic lighting level 10 %

RS PRO P2 S Neutral white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841056070

E-Nr. 941000199

Accessories

ORDERING INFORMATION	
Art.-Nr.	056070
EAN	4007841056070
E-Number	941000199
Typ	RS PRO P2 S Neutral white
neva lux nevalux AG Neugrütstrasse 2 8610 Uster +41 44 508 78 78 info@nevalux.swiss	