

True Presence COM2 - surface black

PRESENCE DETECTOR

neva
lux

EAN 4007841068288

E-Nr. 535918116

● steinel

45 x 123 x 123 mm



True Presence COM2 - surface black

PRESENCE DETECTOR

EAN 4007841068288
E-Nr. 535918116

Technical Data

IDENTIFICATION		Detection		also through glass, wood and stud walls	Main light adjustable	No
Version	Presence detector	Detection angle		360 °	Functions	Group parameterisation Semi-/fully automatic
DIMENSIONS		Opening angle		160 °	Lighting scenario Manual ON / ON-OFF Neighbouring group function Normal / test mode	
Dimensions L x W x H	45 x 123 x 123 mm	Sneak-under protection		Yes	Settings via	Bluetooth
ELECTRICAL		Segment-by-segment masking		No	With remote control	No
Mains connection	220 – 240 V / 50 – 60 Hz	Electronic scalability		Yes	Twilight setting teach	No
Power	2000 W	Mechanical scalability		No	HOUSING & MATERIAL	
Switching output 1 resistive	2000 W	Radial range		Ø 15 m (177 m²)	Protection class (IP)	IP54
Fluorescent lamps uncompensated	1000 VA	Tangential range		Ø 15 m (177 m²)	Ambient temperature	from -20 up to 50 °C
Switching output 1 low-voltage halogen lamps	1000 VA	Mounting height		2 – 12 m	Mounting location	ceiling
Capacitive load in µF	176 µF	Presence range		Ø 15 m (177 m²)	Application location	Indoors
Own consumption	1 W	True Presence range		Ø 9 m (64 m²)	Mounting type	Surface wiring
Switching output 1 number of LED/fluorescent lamps	8 pcs.	Optimal mounting height		2,8 m	Material	Plastic
Switching output 1 potential-free	No	CONNECTIVITY			Application room	Indoors WC / washroom care room changing room classroom conference room / meeting room dining hall / staff restaurant duty room high-bay warehouse hotel room kitchenette lecture hall one-person office open-plan office production facilities reception / lobby recreation room sports hall warehouse
Switching output 2 resistive	230 W	Networking		Yes	Colour	black
Switching output 2 potential-free	Yes	Type of networking		Master/master Master/slave	RAL colour	9005
SENSOR TECHNOLOGY		Networking via		Bluetooth	SCOPE OF DELIVERY & WARRANTY	
Max. mounting height	12,00 m	LIGHTING TECHNOLOGY			Manufacturer warranty	5 years
Sensor technology	High frequency	Soft light start		No	Corner wall bracket included	No
Transmission power	< 1 mW	Continuous light		selectable		
HF technology	7,2 GHz	Constant light regulation		No		
With motion detector	Yes	SETTINGS				
		Twilight switch		No		
		Time setting		30 s – 30 Min.		
		Base light function		No		


True Presence COM2 - surface black

PRESENCE DETECTOR

EAN 4007841068288
E-Nr. 535918116

Illustrations

TECHNICAL DRAWINGS

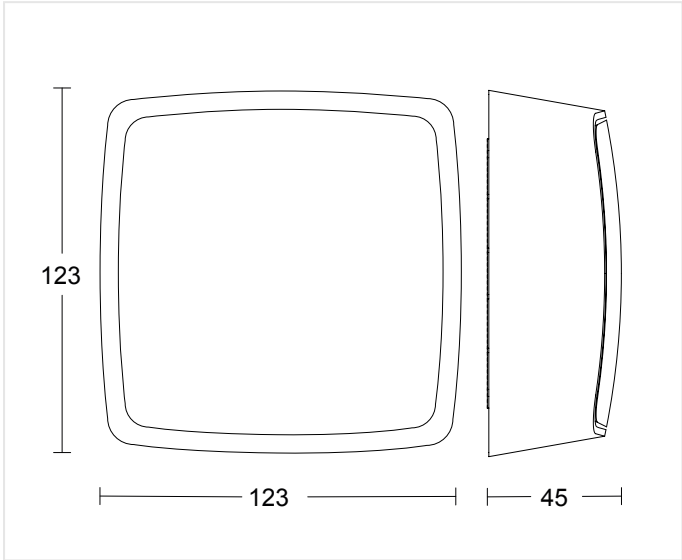

45 x 123 x 123 mm

MOUNTING HEIGHT

2 – 12 m BEREICH	2,8 m OPTIMAL	12,00 m MAX
---------------------	------------------	----------------

True Presence COM2 - surface black

PRESENCE DETECTOR


EAN 4007841068288

E-Nr. 535918116


Highlights



UV-resistant plastic

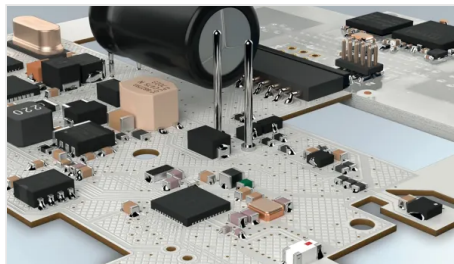

Digital high frequency sensor

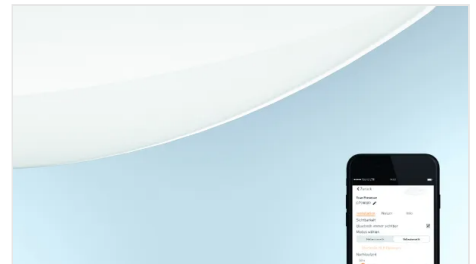

Interconnectable and adjustable via
Bluetooth

True Presence COM2 - surface black

PRESENCE DETECTOR

EAN 4007841068288
E-Nr. 535918116

Accessories

ORDERING INFORMATION	
Art.-Nr.	068288
EAN	4007841068288
E-Number	535918116
Typ	True Presence COM2 - surface black
nevalux nevalux AG Neugrütstrasse 2 8610 Uster +41 44 508 78 78 info@nevalux.swiss	