

RS PRO S10 SC Multipack (5 pcs.) PC warm white

neva
lux**SENSOR-SWITCHED LED INDOOR LIGHT**

EAN 4007841081935

E-Nr. 941349469

 **steinel**

300 x 71 mm



RS PRO S10 SC Multipack (5 pcs.) PC warm white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841081935

E-Nr. 941349469

Technical Data

DIMENSIONS

Dimensions Ø x H

300 x 71 mm

ELECTRICAL

Mains connection

220 – 240 V / 50 – 60 Hz

Power

9,1 W

Own consumption

0,38 W

SENSOR TECHNOLOGY

Max. mounting height

4,00 m

Sensor technology

High frequency

Transmission power

< 1 mW

HF technology

5,8 GHz

With motion detector

Yes

Detection

also through glass, wood and stud walls

Detection angle

360 °

Opening angle

160 °

Electronic scalability

Yes

Radial range

Ø 8 m (50 m²)

Tangential range

Ø 8 m (50 m²)

Mounting height

2 – 4 m

Optimal mounting height

2,8 m

CONNECTIVITY

Networking

Yes

Networking via

Bluetooth Mesh

Slave mode adjustable

Yes

LIGHTING TECHNOLOGY

Measured luminous flux
360°

979 lm

Colour temperature

3000 K

LED colour deviation

SDCM3

With illuminant

Yes, STEINEL LED system

Illuminant

LED cannot be replaced

LED cooling system

Passive Thermo Control

Soft light start

Yes

Continuous light

selectable

SETTINGS

Twilight switch

Yes

Twilight setting

2 – 2000 lx

Time setting

5 s – 60 Min.

Base light function

Yes

Base light function detail

LED effect light

Base light function time

1-60 min

Main light adjustable

Yes

Functions

Motions sensor Adjustable
fade time when switching on
and off DIM function Free
selection of the light value in
a luminaire group Group
parameterisation Semi-/fully
automatic Light sensor
Neighbouring group function
Normal / test mode
Orientation light Presence
detector logic Encrypted
communication

Settings via

App Bluetooth Mesh

Twilight setting teach

Yes

Base light function in
percent

7 – 100 %

Base light function percent
from

7 %

HOUSING & MATERIAL

Impact resistance

IK07

Protection class (IP)

IP20

Protection class

II

Ambient temperature

from -20 up to 40 °C

Housing material

Aluminium

Cover material

PC, opal

Mounting location

ceiling wall

Application location

Indoors

Mounting type

Surface wiring

Application room

Indoors corridor / aisle
function room / ancillary
room multi-storey /
underground car park
reception / lobby

Colour

white

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty

5 years

House number sheet
included

No

CERTIFICATES & EPREL

EPREL category

Surrounded product with
integrated light source

RS PRO S10 SC Multipack (5 pcs.) PC warm white


SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841081935

E-Nr. 941349469

Illustrations

TECHNICAL DRAWINGS

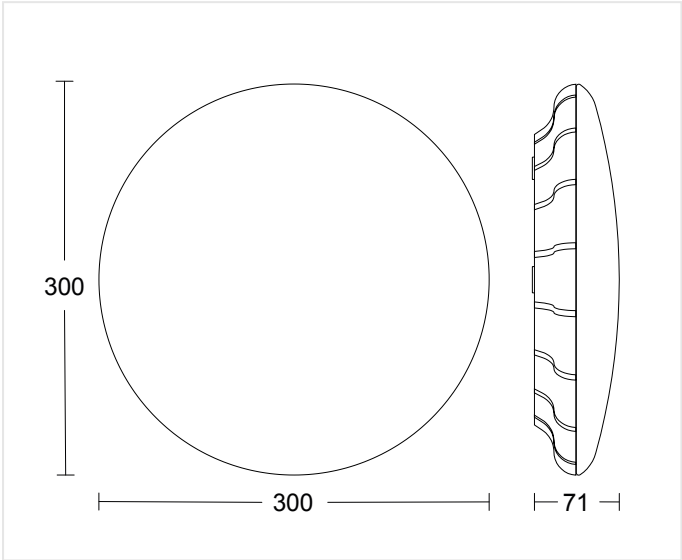

300 x 71 mm

MOUNTING HEIGHT

2 – 4 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
---------------------------------------	-------------------------------------	----------------------------------

RS PRO S10 SC Multipack (5 pcs.) PC warm white


SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841081935

E-Nr. 941349469


Wiring Diagrams

WIRING DIAGRAM 1

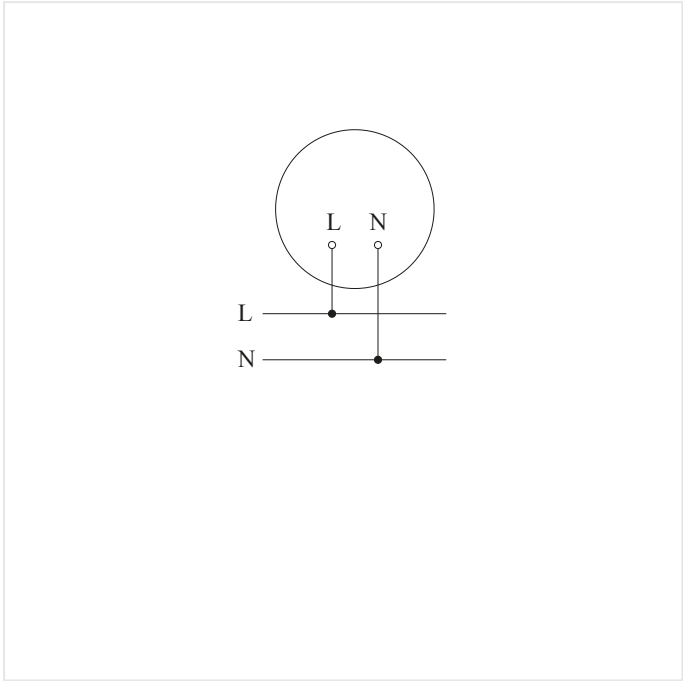

Slave/wireless master interconnection circuit diagram

WIRING DIAGRAM 2

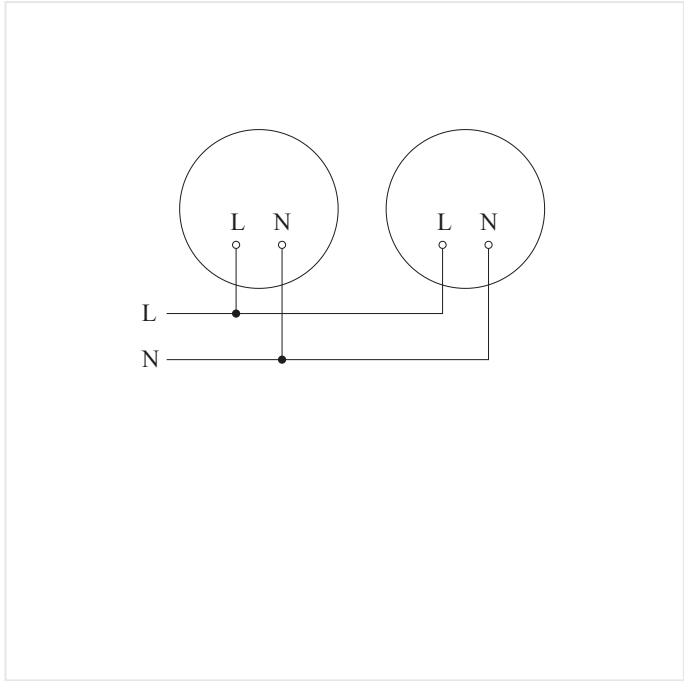

Master/master interconnection circuit diagram


RS PRO S10 SC Multipack (5 pcs.) PC warm white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841081935

E-Nr. 941349469

Highlights

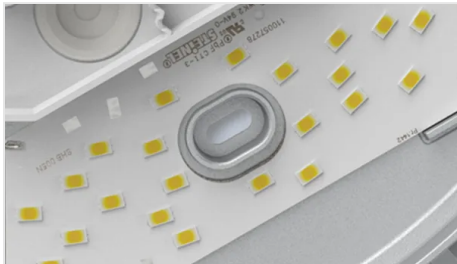


Including STEINEL LED system



Intelligent LED cooling system



Optional basic lighting level 10 %

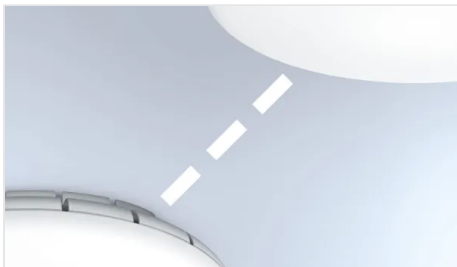

Interconnectable and adjustable via
Bluetooth



High-quality aluminium

RS PRO S10 SC Multipack (5 pcs.) PC warm white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841081935

E-Nr. 941349469

Accessories

ORDERING INFORMATION	
Art.-Nr.	081935
EAN	4007841081935
E-Number	941349469
Typ	RS PRO S10 SC Multipack (5 pcs.) PC warm white

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss