

PD IR 4360-24 COM1 - concealed black

neva
lux**MOTION AND PRESENCE DETECTOR**

EAN 4007841085070

E-Nr. 535900029

- Our series for the common ranges
- Presence detector with 24 m motion detection and 7.5 m presence detection for switching light
- Ideal for offices, meeting rooms or passageways
- Includes insertable cover caps to limit the detection range
- Installation-friendly, thanks to round design and modular system with magnetic plug-in connection
- Key input and parallel switching of multiple sensors to expand the detection range
- External approval and measurement in accordance with sensNORM

 **steinel**

109 x 74 mm



PD IR 4360-24 COM1 - concealed black

MOTION AND PRESENCE DETECTOR

EAN 4007841085070

E-Nr. 535900029

Technical Data

IDENTIFICATION

Version	Motion and Presence Detector
---------	------------------------------

DIMENSIONS

Dimensions Ø x H	109 x 74 mm
------------------	-------------

ELECTRICAL

Mains connection	50 – 60 Hz
Switching output 1 resistive	2000 W
LED lamps > 8 W	500 W
Capacitive load in µF	176 µF
Switching output 1 number of LED/fluorescent lamps	50 pcs.

SENSOR TECHNOLOGY

Max. mounting height	10,00 m
Sensor technology	passive infrared
With motion detector	Yes
Detection angle	360 °
Sneak-under protection	Yes
Segment-by-segment masking	Yes
Electronic scalability	No
Mechanical scalability	No
Radial range	Ø 5.5 m (24 m²)

Tangential range	Ø 24 m (452 m²)
Switching zones	1436 switching zones
Mounting height	2 – 10,00 m
Presence range	Ø 7.5 m (44 m²)
Optimal mounting height	2,8 m

CONNECTIVITY

Networking	Yes
Type of networking	Master/master
Networking via	Cable
Networking quantity	max. 10 sensors

LIGHTING TECHNOLOGY

Soft light start	Yes
Constant light regulation	No

SETTINGS

Twilight switch	Yes
Twilight setting	2 – 1000 lx
Time setting	5 s – 60 Min.
Main light adjustable	No

Functions	Motions sensor Presence function detector logic automatic mode Normal / test mode Light sensor Presence function detector logic Potentiometer Relay output
-----------	---

Settings via	Remote control Smart Remote Potentiometers
With remote control	No
Twilight setting teach	Yes

HOUSING & MATERIAL

Protection class (IP)	IP20
Ambient temperature	from -20 up to 50 °C
Housing material	Plastic
Cover material	Other
Cover material (scope of delivery)	shrouds
Mounting location	ceiling
Application location	Indoors
Mounting type	Concealed wiring
Material	Plastic
Application room	Indoors function room / ancillary room one-person office warehouse
Colour	black
RAL colour	9010

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	5 years
Corner wall bracket included	No

PD IR 4360-24 COM1 - concealed black


MOTION AND PRESENCE DETECTOR

EAN 4007841085070

E-Nr. 535900029

Illustrations

TECHNICAL DRAWINGS

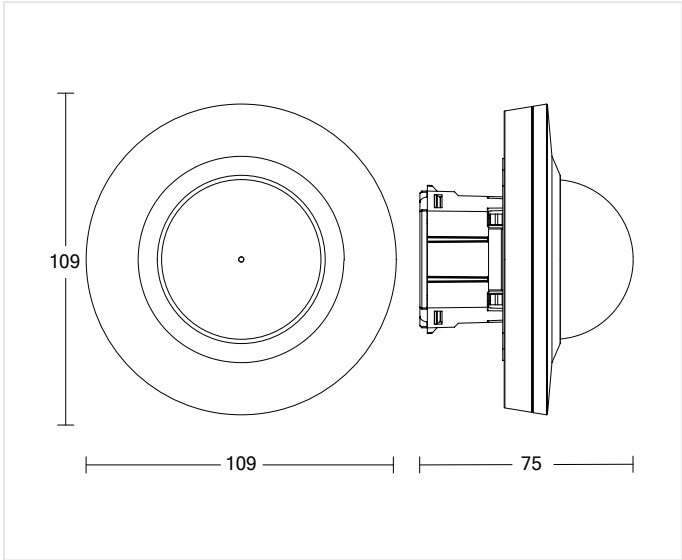

109 x 74 mm

MOUNTING HEIGHT

2 – 10,00 m BEREICH	2,8 m OPTIMAL	10,00 m MAX
---	-------------------------------------	-----------------------------------

PD IR 4360-24 COM1 - concealed black

MOTION AND PRESENCE DETECTOR

EAN 4007841085070

E-Nr. 535900029


Wiring Diagrams

WIRING DIAGRAM 1



Circuit diagram

WIRING DIAGRAM 2

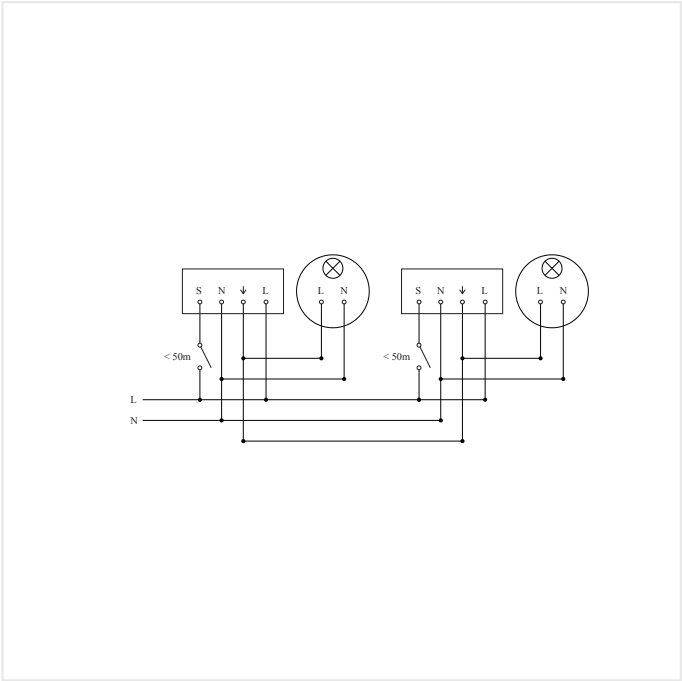

Circuit diagram for interconnecting several sensors

PD IR 4360-24 COM1 - concealed black

MOTION AND PRESENCE DETECTOR

EAN 4007841085070
E-Nr. 535900029

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841079543	Deckeneinbau-Adapter Deckeneinbau	Accessory
 4007841009151	Smart Remote	Accessory
 4007841592806	Nutzer Fernbedienung RC5	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory

ORDERING INFORMATION

Art.-Nr.

085070

EAN

4007841085070

E-Number

535900029

Typ

PD IR 4360-24 COM1 - concealed black

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss