

XLED home 2 XL S white

SENSOR-SWITCHED LED FLOODLIGHT

neva
lux

EAN 4007841030070

E-Num. 924700185

- Spotlight with motion detector and fully swivelling LED panel in elegant opal look, ideal for illuminating larger areas such as driveways, patios or gardens
- Never change bulbs again thanks to 50,000 hours LED life (approx. 30 years at 4.5 hours/day)
- Automatic light thanks to 180 ° Infrared sensor with up to 10 m detection of movement
- Optional corner wall bracket available for reliable and uninterrupted monitoring of an area in front of two house walls
- Warm white light (3000 K) and long-life 19,3 W LEDs with 2124 lm, with an illumination of over 300 sqm, max. 4m mounting height
- Incl. mounting accessories - plastic-free packaging

 **steinel**

161 x 180 x 240 mm



XLED home 2 XL S white

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841030070

E-Nr. 924700185

Technical Data

DIMENSIONS		LIGHTING TECHNOLOGY		HOUSING & MATERIAL	
Dimensions L x W x H	161 x 180 x 240 mm	Measured luminous flux 360°	2124 lm	Protection class (IP)	IP44
ELECTRICAL		Colour temperature	3000 K	Protection class	II
Mains connection	220 – 240 V / 50 – 60 Hz	LED colour deviation	SDCM3	Ambient temperature	from -20 up to 40 °C
Power	19,3 W	Colour rendering index	80-89	Housing material	Plastic
SENSOR TECHNOLOGY		With illuminant	Yes, STEINEL LED system	Cover material	Plastic, opal
Max. mounting height	4,00 m	Illuminant	LED cannot be replaced	Cover material (scope of delivery)	sticker
Sensor technology	passive infrared	Base	without	Mounting location	corner wall
With motion detector	Yes	LED cooling system	HCMC (High Conductive Magnesium Composite)	Application location	Outdoors
Detection angle	180 °	LIFETIME		Mounting type	Surface wiring
Sneak-under protection	Yes	LED lifetime max. °C	50000 h	Application room	all round the building courtyard & driveway outdoors terrace / balcony
Segment-by-segment masking	Yes	Luminous flux decline per LM80	L70B10	Colour	white
Electronic scalability	No	SETTINGS		SCOPE OF DELIVERY & WARRANTY	
Mechanical scalability	No	Twilight switch	Yes	Manufacturer warranty	5 years
Radial range	r = 5 m (39 m²)	Twilight setting	2 – 2000 lx	CERTIFICATES & EPREL	
Tangential range	r = 10 m (157 m²)	Time setting	8 s – 35 Min.	EPREL energy efficiency class	E
Mounting height	1,8 – 4 m	Base light function	No	EPREL category	Light source
Optimal mounting height	2 m	Settings via	Potentiometers		
CONNECTIVITY		Twilight setting teach	No		
Networking	No				


XLED home 2 XL S white

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841030070
E-Nr. 924700185

Illustrations

TECHNICAL DRAWINGS

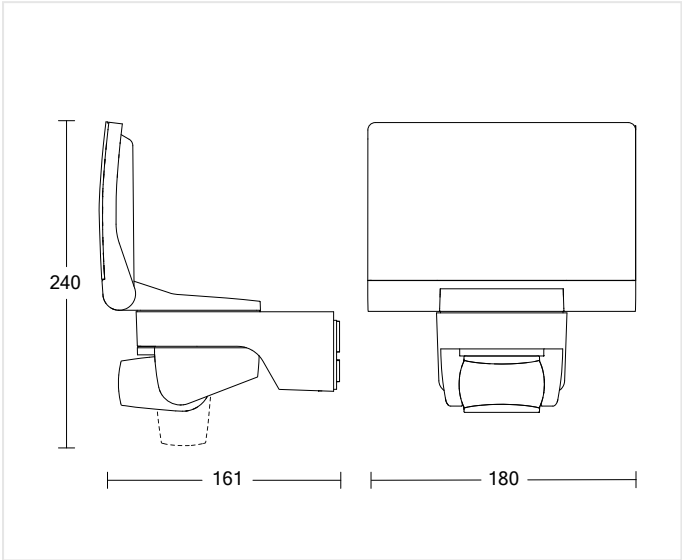


161 x 180 x 240 mm

MOUNTING HEIGHT

1,8 – 4 m BEREICH	2 m OPTIMAL	4,00 m MAX
----------------------	----------------	---------------

Wiring Diagrams

WIRING DIAGRAM 1

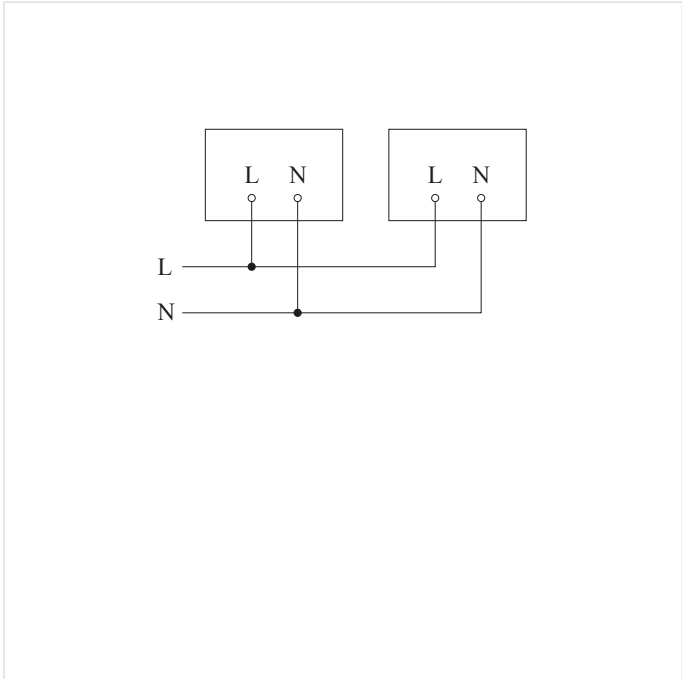

Circuit diagram


XLED home 2 XL S white

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841030070

E-Nr. 924700185

Highlights

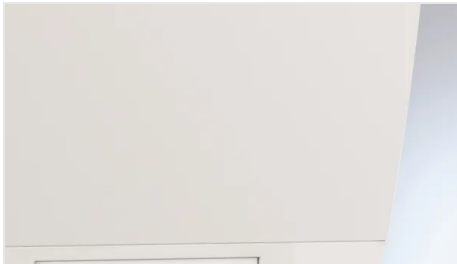


Including STEINEL LED system



HCMC cooling system



UV-resistant plastic

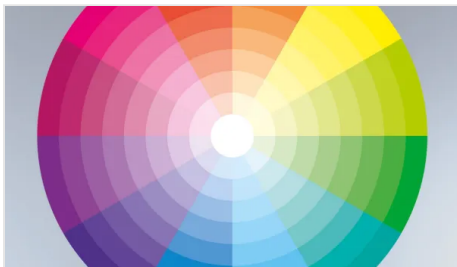

Colour rendering index Ra ≥ 80



Optional corner wall mount bracket

XLED home 2 XL S white

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841030070
E-Nr. 924700185

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841055615	Eckwandhalter XLED Home 2/ Protect/ Pro 240/ PRO Expanse weiss	Accessory
 4007841053086	Eckwandhalter XLED Home 2/ Protect/ Pro 240/ PRO Expanse graphit	Accessory
 4007841055875	Eckwandhalter XLED Home 2/ Protect/ Pro 240 schwarz	Accessory
 4007841053109	Eckwandhalter XLED Home 2/ Protect/ Pro 240/ PRO Expanse silber	Accessory

ORDERING INFORMATION

Art.-Nr.

030070

EAN

4007841030070

E-Number

924700185

Typ

XLED home 2 XL S white

nevalux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss