IS 2180-2 Anthracite

MOTION DETECTOR

EAN 4007841057664
E-Nr. 535940550

- UV-resistant plastic
- Optional corner wall mount bracket

55 x 78 x 120 mm



IS 2180-2 Anthracite

MOTION DETECTOR

EAN 4007841057664
E-Nr. 535940550

Technical Data

IDENTIFICATION

Version	**Motion detectors**

DIMENSIONS

Dimensions L × W × H	**55 x 78 x 120 mm**

ELECTRICAL

Mains connection	**230 V / 50 Hz**
Power	**1000 W**
Switching output 1 resistive	**1000 W**
Fluorescent lamps ECG	**1000 W**
Fluorescent lamps uncompensated	**500 VA**
Fluorescent lamps series-compensated	**900 VA**
Fluorescent lamps parallel-compensated	**500 VA**
Switching output 1 low-voltage halogen lamps	**1000 VA**
LED lamps < 2 W	**100 W**
LED lamps > 2 W < 8 W	**175 W**
LED lamps > 8 W	**350 W**
Capacitive load in µF	**132 µF**
Own consumption	**0,5 W**
Switching output 1 potential-free	**No**

SENSOR TECHNOLOGY

Max. mounting height	**4,00 m**
Sensor technology	**passive infrared**
With motion detector	**Yes**
Detection angle	**180 °**
Opening angle	**90 °**
Sneak-under protection	**Yes**
Segment-by-segment masking	**Yes**
Electronic scalability	**No**
Mechanical scalability	**No**
Radial range	**r = 1.5 m (4 m²) / r = 3 m (14 m²)**
Tangential range	**r = 5 m (39 m²) / r = 12 m (226 m²)**
Switching zones	**508 switching zones**
Mounting height	**1,8 – 4 m**
Optimal mounting height	**2 m**

CONNECTIVITY

Networking	**Yes**
Type of networking	**Master/master**
Control technology	**On/Off-Leuchte**

LIGHTING TECHNOLOGY

Soft light start	**No**
Continuous light	**selectable**
Constant light regulation	**No**

SETTINGS

Twilight switch	**Yes**
Twilight setting	**2 – 2000 lx**
Time setting	**5 s – 15 Min.**
Base light function	**No**
Main light adjustable	**No**
Settings via	**Potentiometers**
With remote control	**No**
Twilight setting teach	**No**

HOUSING & MATERIAL

Protection class (IP)	**IP54**
Ambient temperature	**from -20 up to 50 °C**
Cover material (scope of delivery)	**shrouds**
Mounting location	**corner wall**
Application location	**Indoors Outdoors**
Mounting type	**Surface wiring**
Material	**Plastic**
Application room	**all round the building courtyard & driveway front door outdoors terrace / balcony**
Colour	**Anthracite**
RAL colour	**7016**

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	**5 years**
Corner wall bracket included	**No**


IS 2180-2 Anthracite

MOTION DETECTOR

EAN **4007841057664**
E-Nr. **535940550**

Illustrations

TECHNICAL DRAWINGS

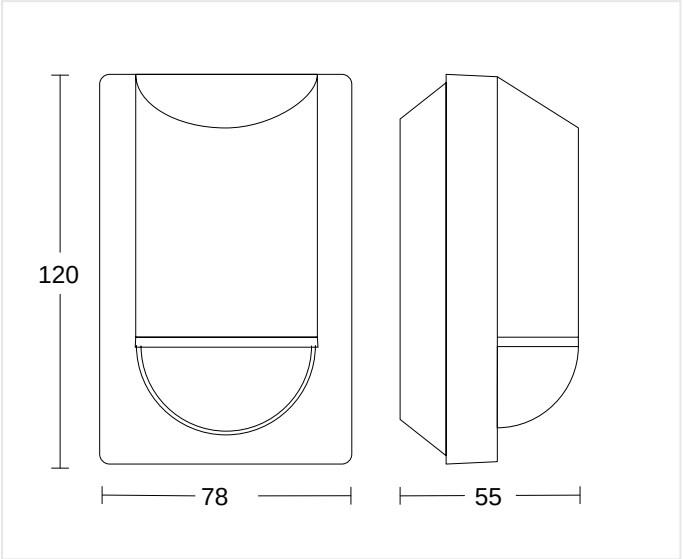

55 x 78 x 120 mm

MOUNTING HEIGHT

1,8 – 4 m	2 m	4,00 m
BEREICH	OPTIMAL	MAX


IS 2180-2 Anthracite

MOTION DETECTOR

EAN **4007841057664**
E-Nr. **535940550**


Wiring Diagrams

WIRING DIAGRAM 1

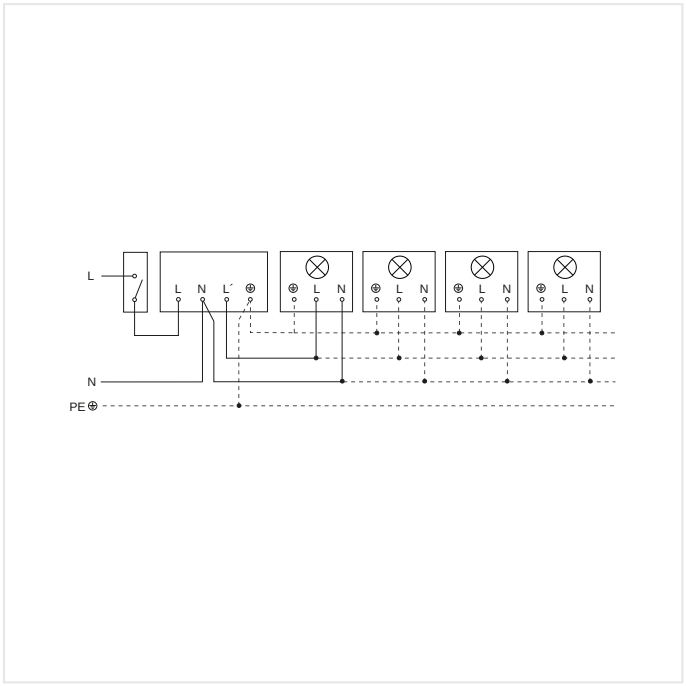

Light without neutral conductor

WIRING DIAGRAM 2

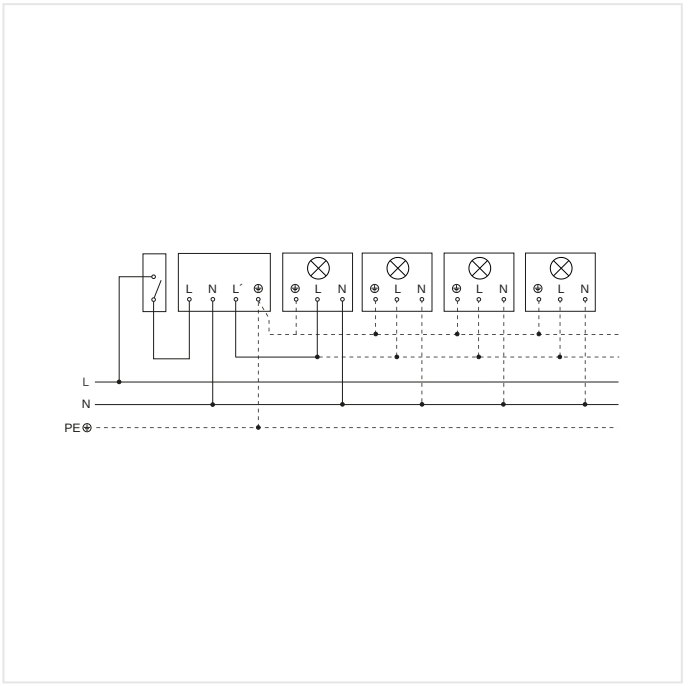

Light with neutral conductor

IS 2180-2 Anthracite

MOTION DETECTOR

EAN 4007841057664
E-Nr. 535940550

Accessories

	ARTICLE NUMBER	DESCRIPTION	CATEGORY
	4007841085148	**Eckwandhalter für IS 180-2, IS 2180-2 und IS 2180 ECO weiss**	Accessory

ORDERING INFORMATION

Art.-Nr.	4007841057664
EAN	4007841057664
E-Number	535940550
Typ	**IS 2180-2 Anthracite**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss