

lisha P1200 Wallwasher 4K

LISHA


neva
lux

Product code 220182

- For directional lighting of walls and wall boards
- Direct and indirect light proportion separately controllable
- Link technology for seamless extension of the luminaire with continuous wiring
- Dimmable DALI, LiveLink compatible
- Variants with 1.2 and 1.8 meter length available
- Housing Aluminium RAL9016, white

neva
lux

1205 x 50 x 95 mm

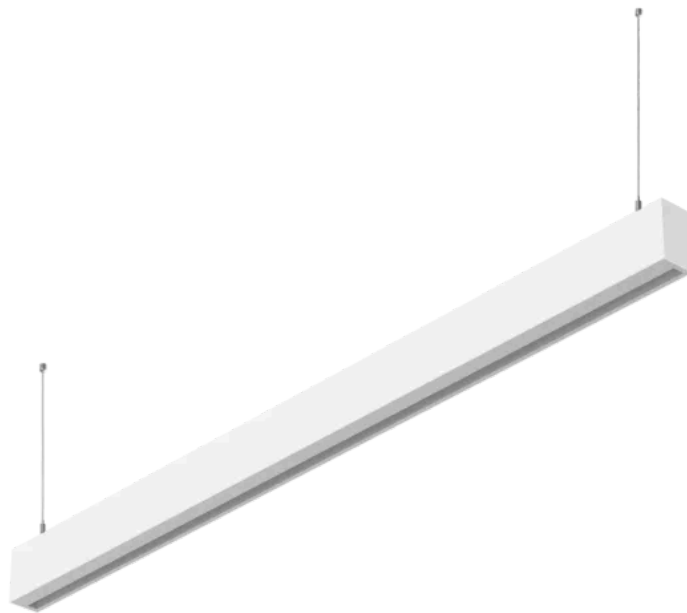

lisha P1200 Wallwasher 4K

Product code 220182

LISHA

Technical Data

DIMENSIONS		LED colour deviation		SDCM3	Constant light output control	Yes
Dimensions L × W × H	1205 x 50 x 95 mm	Colour rendering index		80-89	HOUSING & MATERIAL	
Suspension length	1500 mm	Illuminant		LED	Protection class (IP)	IP20
ELECTRICAL		Luminous flux	4400 lm (Down 2700, Up 1700)		Protection class	I
Mains connection	200...240 V / 50 – 60 Hz	Beam angle	Down Wallwasher, Up 115°		Ambient temperature	-20...45 °C
Power	49 W	Luminaire luminous efficacy	90 lm/W		Housing material	Aluminum
Replaceable driver	Yes	Glare value	UGR < 19		Cover material	Aluminium - Acrylic glass opal
Type of wiring	Through wiring included	LIFETIME			Mounting type	Ceiling pendant
LED rated current	500 mA / 250 mA	LED lifespan (25 °C)	50000 h		Colour	white
Maximum number of luminaires per circuit breaker	C10: 15x, C16: 23x, C20: 29x, B10: 9x, B16: 14x, B25: 17x	SETTINGS			SCOPE OF DELIVERY & WARRANTY	
SENSOR TECHNOLOGY		DALI dimming	Yes		Manufacturer warranty	5 years
With motion detector	No	With emergency light	No		CERTIFICATES & EPREL	
With light sensor	No	Suitable for light band configuration	Yes		EPREL energy efficiency class	F
LIGHTING TECHNOLOGY		Direct/indirect ratio separately controllable	Yes			
Colour temperature	4000 K					

lisha P1200 Wallwasher 4K

LISHA

Product code 220182

Accessories

ORDERING INFORMATION	
Art.-Nr.	220182
Typ	lisha P1200 Wallwasher 4K
nevalux AG Neugrütstrasse 2 8610 Uster +41 44 508 78 78 info@nevalux.swiss	