
nayo SN TW

STEHLEUCHTE DIREKT/INDIREKT TUNABLE WHITE

Product code **220604**

1203 x 52 x 1960 mm

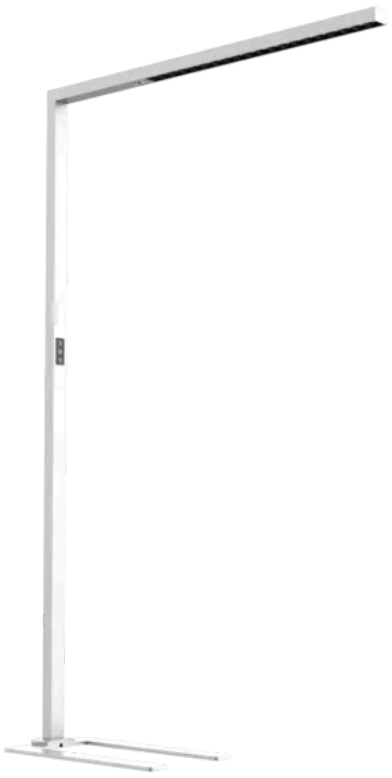

nayo SN TW

STEHLEUCHTE DIREKT/INDIREKT TUNABLE WHITE

Product code **220604**

Technical Data

DIMENSIONS

Dimensions L × W × H	**1203 x 52 x 1960 mm**

ELECTRICAL

Mains connection	**200…240 V / 50 – 60 Hz**
Power	**80 W**
Replaceable driver	**Yes**
LED rated current	**450 mA / 1600 mA**

SENSOR TECHNOLOGY

Sensor technology	**passive infrared**
With motion detector	**Yes**
Detection angle	**360 °**
Presence range	**Ø 3 m**
With light sensor	**Yes**

CONNECTIVITY

Control technology	**Einfache Sensor-Ausführung**

LIGHTING TECHNOLOGY

Colour temperature	**3000…6000 K**
LED colour deviation	**SDCM3**
Colour rendering index	**80-89**
Illuminant	**LED**
Luminous flux	**8000 lm (Down 2000, Up 6000)**
Beam angle	**Down 80°, Up 140°**
Luminaire luminous efficacy	**100 lm/W**
Glare value	**UGR < 12**

LIFETIME

LED lifespan (25 °C)	**50000 h**

SETTINGS

Direct/indirect ratio separately controllable	**Yes**
With switch	**Yes**

HOUSING & MATERIAL

Protection class (IP)	**IP20**
Protection class	**I**
Ambient temperature	**-20…45 °C**
Housing material	**Aluminum**
Cover material	**Darklight Optics**
Mounting type	**Free standing floor**
Colour	**white**

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	**5 years**

CERTIFICATES & EPREL

EPREL energy efficiency class	**F**


nayo SN TW

STEHLEUCHTE DIREKT/INDIREKT TUNABLE WHITE

Product code **220604**

Illustrations

TECHNICAL DRAWINGS

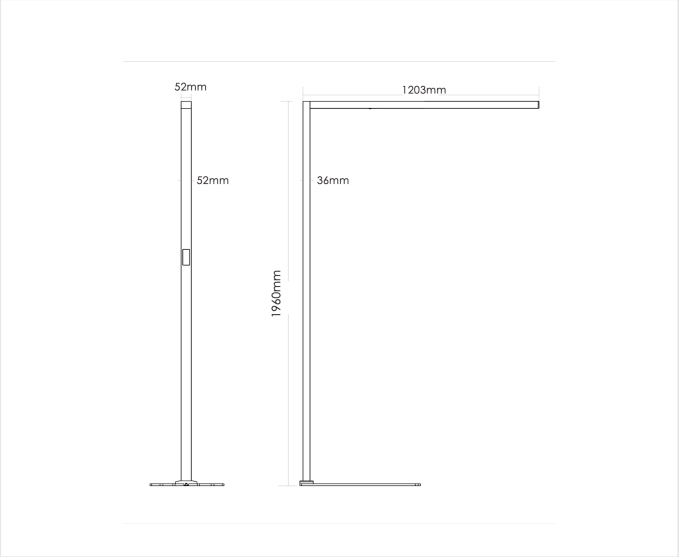

1203 x 52 x 1960 mm

nayo SN TW

STEHLEUCHTE DIREKT/INDIREKT TUNABLE WHITE

Product code **220604**

Accessories

	ARTICLE NUMBER	DESCRIPTION	CATEGORY
	220175	**nayo P 4K**	Pendant luminaire direct/indirect, linkable
	220463	**nayo P Diffused 4K**	Pendant luminaire direct/indirect, linkable

ORDERING INFORMATION

Art.-Nr.	220604
Typ	**nayo SN TW**

neva lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss