

IS 3360 PF - surface, rd.

MOTION AND PRESENCE DETECTOR

neva
lux

EAN 4007841033477

E-Nr. 535943007

● steinel

126 x 65 mm



IS 3360 PF - surface, rd.

MOTION AND PRESENCE DETECTOR

EAN 4007841033477

E-Nr. 535943007

Technical Data


IDENTIFICATION			
Version	Motion and Presence Detector		
DIMENSIONS			
Dimensions Ø × H	126 x 65 mm		
ELECTRICAL			
Mains connection	220 – 240 V / 50 – 60 Hz		
Power	2000 W		
Fluorescent lamps ECG	1500 W		
Fluorescent lamps uncompensated	1000 VA		
Fluorescent lamps series-compensated	400 VA		
Fluorescent lamps parallel-compensated	400 VA		
Switching output 1 low-voltage halogen lamps	2000 VA		
LED lamps < 2 W	100 W		
LED lamps > 2 W < 8 W	300 W		
LED lamps > 8 W	600 W		
Capacitive load in µF	176 µF		
SENSOR TECHNOLOGY			
Max. mounting height	4,00 m		
Sensor technology	passive infrared		
With motion detector	Yes		
Detection angle	360 °		
		Opening angle	180 °
		Sneak-under protection	Yes
		Segment-by-segment masking	Yes
		Electronic scalability	No
		Mechanical scalability	No
		Radial range	Ø 8 m (50 m²)
		Tangential range	Ø 40 m (1257 m²)
		Switching zones	1416 switching zones
		Mounting height	2,50 – 4,00 m
		Presence range	Ø 3 m (7 m²)
		Optimal mounting height	2,8 m
		CONNECTIVITY	
		Networking	Yes
		Type of networking	Master/master
		Networking via	Cable
		LIGHTING TECHNOLOGY	
		Soft light start	No
		Continuous light	selectable, 4h
		Constant light regulation	No
		SETTINGS	
		Twilight switch	Yes
		Twilight setting	2 – 1000 lx
		Time setting	5 s – 15 Min.
		Base light function	No
		Main light adjustable	No
		Functions	Normal / test mode Manual ON / ON-OFF
		Settings via	Remote control Potentiometers Smart Remote
		With remote control	No
		Twilight setting teach	Yes
		HOUSING & MATERIAL	
		Protection class (IP)	IP54
		Ambient temperature	from -20 up to 50 °C
		Mounting location	ceiling
		Application location	Indoors Outdoors
		Mounting type	Surface wiring
		Material	Plastic
		Application room	Indoors WC / washroom changing room function room / ancillary room multi-storey / underground car park outdoors production facilities reception / lobby recreation room sports hall stairwell warehouse
		Colour	white
		RAL colour	9003
		SCOPE OF DELIVERY & WARRANTY	
		Manufacturer warranty	5 years
		Corner wall bracket included	No

IS 3360 PF - surface, rd.
MOTION AND PRESENCE DETECTOR

EAN 4007841033477
E-Nr. 535943007

Illustrations

TECHNICAL DRAWINGS

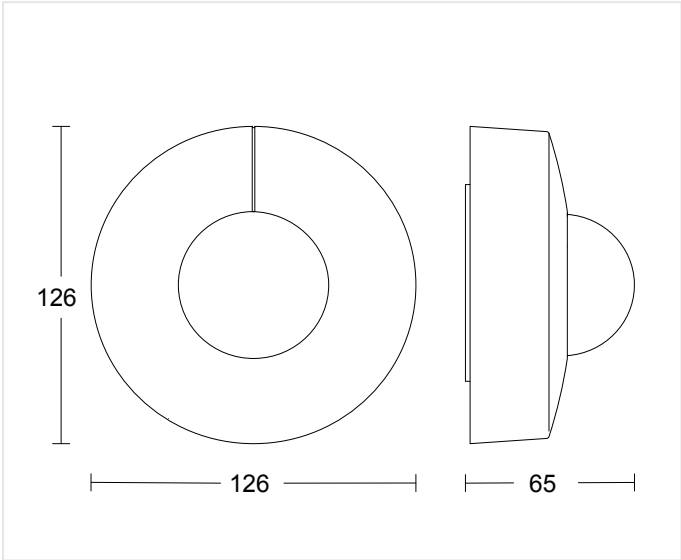

126 x 65 mm

MOUNTING HEIGHT


2,50 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------------	------------------	---------------

IS 3360 PF - surface, rd.
MOTION AND PRESENCE DETECTOR

EAN 4007841033477
E-Nr. 535943007

Wiring Diagrams

WIRING DIAGRAM 1

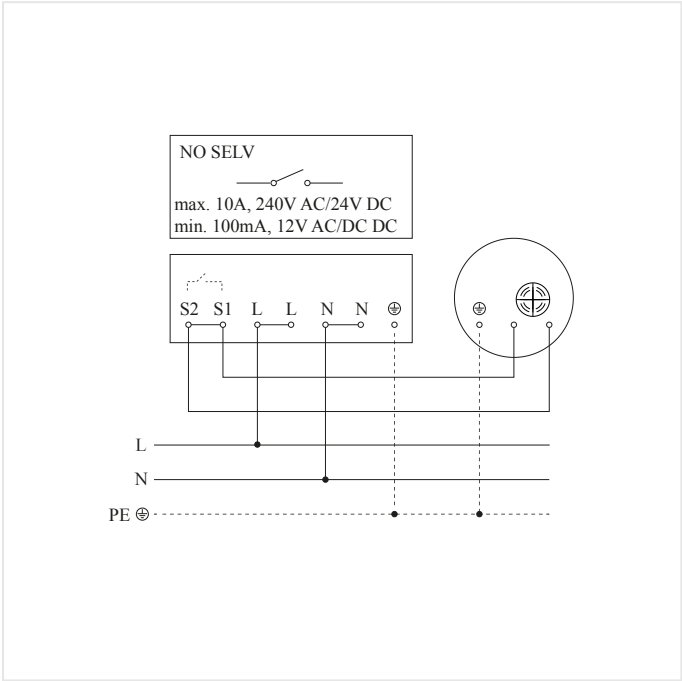

Master circuit diagram

IS 3360 PF - surface, rd.

MOTION AND PRESENCE DETECTOR

EAN 4007841033477

E-Nr. 535943007

Highlights



UV-resistant plastic



Large terminal compartment



Optional remote controls

IS 3360 PF - surface, rd.
MOTION AND PRESENCE DETECTOR

EAN 4007841033477
E-Nr. 535943007

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841009151	Smart Remote	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory
 4007841056735	Schwarze Blende für IR-Sensoren Aufputz rund	Accessory
 4007841056711	Schwarze Blende für IR-Sensoren Aufputz eckig	Accessory

ORDERING INFORMATION

Art.-Nr.

033477

EAN

4007841033477

E-Number

535943007

Typ

IS 3360 PF - surface, rd.

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss