

NightmatIQ Anthracite

PHOTOELECTRIC LIGHTING CONTROLLER

neva
lux

EAN 4007841066130

- Photo-cell controller for automatic night-time illumination of house fronts, gardens, shop windows and other areas
- Straight, flat design made of UV-resistant material
- Thanks to the brightness sensor, the light comes on automatically at dusk - and goes off again at dawn
- The twilight value can be individually adjusted from 1 - 75 lux ambient brightness via potentiometer
- Incl. mounting accessories - plastic-free packaging

● steinel

38 x 95 x 95 mm



EAN 4007841066130

Technical Data

Version	Photo-cell controller
1.0	1.0
1.1	1.1
1.2	1.2
1.3	1.3
1.4	1.4
1.5	1.5
1.6	1.6
1.7	1.7
1.8	1.8
1.9	1.9
2.0	2.0
2.1	2.1
2.2	2.2
2.3	2.3
2.4	2.4
2.5	2.5
2.6	2.6
2.7	2.7
2.8	2.8
2.9	2.9
3.0	3.0
3.1	3.1
3.2	3.2
3.3	3.3
3.4	3.4
3.5	3.5
3.6	3.6
3.7	3.7
3.8	3.8
3.9	3.9
4.0	4.0
4.1	4.1
4.2	4.2
4.3	4.3
4.4	4.4
4.5	4.5
4.6	4.6
4.7	4.7
4.8	4.8
4.9	4.9
5.0	5.0
5.1	5.1
5.2	5.2
5.3	5.3
5.4	5.4
5.5	5.5
5.6	5.6
5.7	5.7
5.8	5.8
5.9	5.9
6.0	6.0
6.1	6.1
6.2	6.2
6.3	6.3
6.4	6.4
6.5	6.5
6.6	6.6
6.7	6.7
6.8	6.8
6.9	6.9
7.0	7.0
7.1	7.1
7.2	7.2
7.3	7.3
7.4	7.4
7.5	7.5
7.6	7.6
7.7	7.7
7.8	7.8
7.9	7.9
8.0	8.0
8.1	8.1
8.2	8.2
8.3	8.3
8.4	8.4
8.5	8.5
8.6	8.6
8.7	8.7
8.8	8.8
8.9	8.9
9.0	9.0
9.1	9.1
9.2	9.2
9.3	9.3
9.4	9.4
9.5	9.5
9.6	9.6
9.7	9.7
9.8	9.8
9.9	9.9
10.0	10.0
10.1	10.1
10.2	10.2
10.3	10.3
10.4	10.4
10.5	10.5
10.6	10.6
10.7	10.7
10.8	10.8
10.9	10.9
11.0	11.0
11.1	11.1
11.2	11.2
11.3	11.3
11.4	11.4
11.5	11.5
11.6	11.6
11.7	11.7
11.8	11.8
11.9	11.9
12.0	12.0
12.1	12.1
12.2	12.2
12.3	12.3
12.4	12.4
12.5	12.5
12.6	12.6
12.7	12.7
12.8	12.8
12.9	12.9
13.0	13.0
13.1	13.1
13.2	13.2
13.3	13.3
13.4	13.4
13.5	13.5
13.6	13.6
13.7	13.7
13.8	13.8
13.9	13.9
14.0	14.0
14.1	14.1
14.2	14.2
14.3	14.3
14.4	14.4
14.5	14.5
14.6	14.6
14.7	14.7
14.8	14.8
14.9	14.9
15.0	15.0
15.1	15.1
15.2	15.2
15.3	15.3
15.4	15.4
15.5	15.5
15.6	15.6
15.7	15.7
15.8	15.8
15.9	15.9
16.0	16.0
16.1	16.1
16.2	16.2
16.3	16.3
16.4	16.4
16.5	16.5
16.6	16.6

Dimensions L x W x H 38 x 95 x 95 mm

Mains connection 220 – 240 V / 50 – 60 Hz

Switching output 1 resistive	1000 W
---------------------------------	--------

Fluorescent lamps ECG	250 W
-----------------------	-------

Fluorescent lamps Eca 250 W

With motion detector	No
----------------------	----

Networking	Yes
------------	-----

Networking via Cable

Twilight switch	Yes
-----------------	-----

Twilight setting	1 – 75 lx
------------------	-----------

Protection class (IP)	IP54
-----------------------	------

Ambient temperature from -20 up to 40 °C

Housing material	Plastic
------------------	---------

Mounting location	wall
-------------------	------

Application location	Outdoors
----------------------	----------

Application location	Outdoor
Mounting type	Surface wiring

Mounting type	Surface wiring
Material	Plastic

[illegible]

Indoors all round the building courtyard & driveway front door outdoors

terrace / balcony

Manufacturer warranty **3 years**


NightmatIQ Anthracite

EAN 4007841066130

PHOTOELECTRIC LIGHTING CONTROLLER

Illustrations

TECHNICAL DRAWINGS

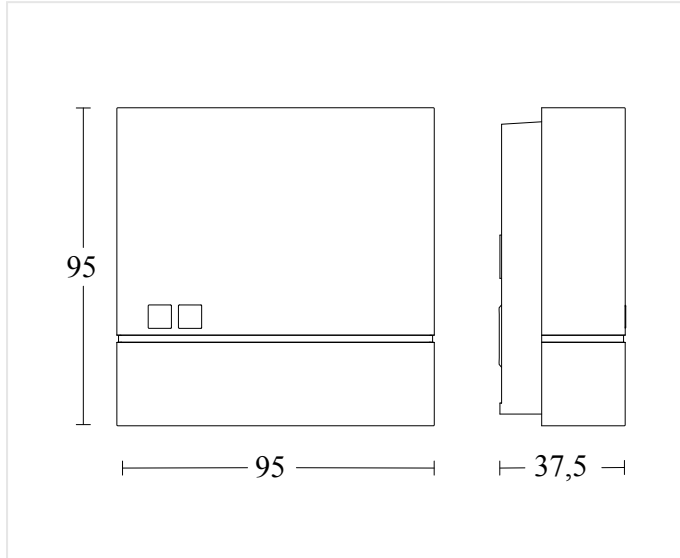

38 x 95 x 95 mm


NightmatIQ Anthracite

PHOTOELECTRIC LIGHTING CONTROLLER

EAN 4007841066130

Wiring Diagrams

WIRING DIAGRAM 1

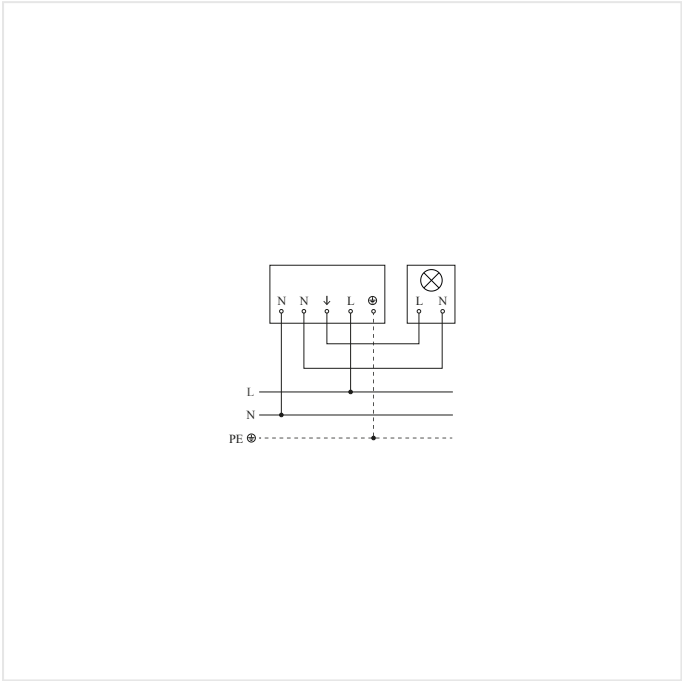

Circuit diagram

NightmatIQ Anthracite

PHOTOELECTRIC LIGHTING CONTROLLER

EAN 4007841066130

Highlights



UV resistant material

NightmatIQ Anthracite

PHOTOELECTRIC LIGHTING CONTROLLER

EAN 4007841066130

Accessories

ORDERING INFORMATION	
Art.-Nr.	066130
EAN	4007841066130
Typ	NightmatIQ Anthracite
nevalux nevalux AG Neugrütstrasse 2 8610 Uster +41 44 508 78 78 info@nevalux.swiss	