

lisha C1800 4K

LISHA


neva
lux

Product code 220177

- For universal use for lighting offices, schools, traffic zones, etc.
- Available as intelligent Connect version or as conventional DALI luminaire
- Connect variant with powerful IoT lighting control for next-generation lighting projects (swarm function, grouping, cleaning light, etc.)
- Link technology for seamless extension of the luminaire with continuous wiring
- Versions with 1.2 and 1.8 meter length available
- Housing Aluminium white

neva
lux

1805 x 50 x 95 mm

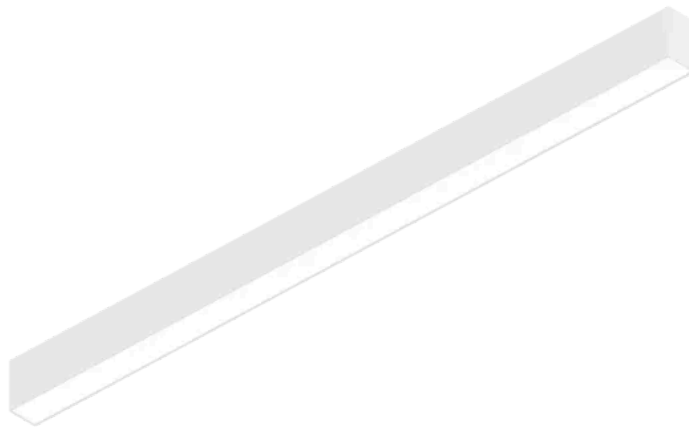

lisha C1800 4K

LISHA

Product code 220177

Technical Data

DIMENSIONS		LIGHTING TECHNOLOGY		Suitable for light band configuration	Yes
Dimensions L x W x H	1805 x 50 x 95 mm	Colour temperature	4000 K		
ELECTRICAL		LED colour deviation	SDCM3	HOUSING & MATERIAL	
Mains connection	200...240 V / 50 – 60 Hz	Colour rendering index	80-89	Protection class (IP)	IP20
Power	52 W	Illuminant	LED	Protection class	I
Replaceable driver	Yes	Luminous flux	5500 lm	Ambient temperature	-20...45 °C
Type of wiring	Through wiring included	Beam angle	105°	Housing material	Aluminum
LED rated current	1050 mA	Luminaire luminous efficacy	106 lm/W	Cover material	Acrylic glass opal
Maximum number of luminaires per circuit breaker	C10: 20x, C16: 46x, C20: 44x, B10: 12x, B16: 20x, B25: 26x	Glare value	UGR < 22	Mounting type	Ceiling surface-mounted
SENSOR TECHNOLOGY		LIFETIME		Colour	white
With motion detector	No	LED lifespan (25 °C)	50000 h	SCOPE OF DELIVERY & WARRANTY	
With light sensor	No	SETTINGS		Manufacturer warranty	5 years
		DALI dimming	Yes	CERTIFICATES & EPREL	
		With emergency light	No	EPREL energy efficiency class	E

lisha C1800 4K

LISHA

Product code **220177**

Accessories

ORDERING INFORMATION	
Art.-Nr.	220177
Typ	lisha C1800 4K
neva lux nevalux AG Neugrütstrasse 2 8610 Uster +41 44 508 78 78 info@nevalux.swiss	