# My XSolar SOL-O HN Anthracite

**SOLAR LIGHT**

EAN 4007841065881

- Individual house number lighting. Solar light with twilight sensor and house number panel, in elegant simple design with high-quality aluminium housing
- Your luminaire is already delivered to your home with your desired house number. The Premium house number version with stainless steel-look trim and punched-out house number (Note: This product is only sold in the German STEINEL Online Shop)
- Fast and flexible installation even in places without cable connection, 0€ electricity costs for 365 days of light a year
- Thanks to the monocrystalline solar panel, the powerful lithium-ferrum battery charges optimally even in cloudy weather and with few hours of sunlight, 2000 mAh capacity for up to 40 days of light reserve
- Thanks to the brightness sensor, the light comes on automatically at dusk - and goes off again at dawn
- Functions: Evening mode for 4 hrs. continuous lighting, night mode for reduced continuous lighting all night, pleasant soft light start
- Warm white light (3000 K) with long-life LED lighting system (50.000 h LED service life)

steinel

91 x 242 x 183 mm



# My XSolar SOL-O HN Anthracite

SOLAR LIGHT

EAN 4007841065881

## Technical Data

### DIMENSIONS

| | |
|---|---|
| Dimensions L × W × H | 91 x 242 x 183 mm |

### ELECTRICAL

| | |
|---|---|
| Power | 0,07 W |
| Supply voltage detail | Solar supply, no mains power required Lithium-iron-phosphate rechargeable battery 2000 mAh |

### SENSOR TECHNOLOGY

| | |
|---|---|
| Max. mounting height | 2,50 m |
| Sensor technology | Light sensor |
| With motion detector | No |
| Mounting height | 1,80 – 2,50 m |

### CONNECTIVITY

| | |
|---|---|
| Control technology | On/Off-Leuchte |

### LIGHTING TECHNOLOGY

| | |
|---|---|
| Measured luminous flux 360° | 7 lm |
| Colour temperature | 3000 K |
| LED colour deviation | SDCM5 |
| Colour rendering index | 80-89 |
| With illuminant | Yes, STEINEL LED system |
| Illuminant | LED cannot be replaced |
| Base | without |
| LED cooling system | Passive Thermo Control |
| Soft light start | Yes |
| Efficiency without cover | 100 lm/W |

### LIFETIME

| | |
|---|---|
| LED lifetime max. °C | 50000 h |
| Luminous flux decline per LM80 | L70B10 |

### SETTINGS

| | |
|---|---|
| Twilight switch | Yes |
| Twilight setting | 2 lx |
| Base light function | Yes |
| Base light function time | all night |
| Functions | Light sensor |
| Settings via | Potentiometers |

### HOUSING & MATERIAL

| | |
|---|---|
| Impact resistance | IK03 |
| Protection class (IP) | IP44 |
| Protection class | III |
| Ambient temperature | from -20 up to 40 °C |
| Housing material | Aluminium |
| Cover material | Plastic, structured |
| Mounting location | wall |
| Application location | Outdoors |
| Mounting type | Surface wiring |
| Application room | courtyard & driveway front door outdoors |
| Colour | Anthracite |

### SCOPE OF DELIVERY & WARRANTY

| | |
|---|---|
| Manufacturer warranty | 3 years |

### CERTIFICATES & EPREL

| | |
|---|---|
| Certificates | GS |


# My XSolar SOL-O HN Anthracite

SOLAR LIGHT

EAN 4007841065881

## Illustrations

### TECHNICAL DRAWINGS

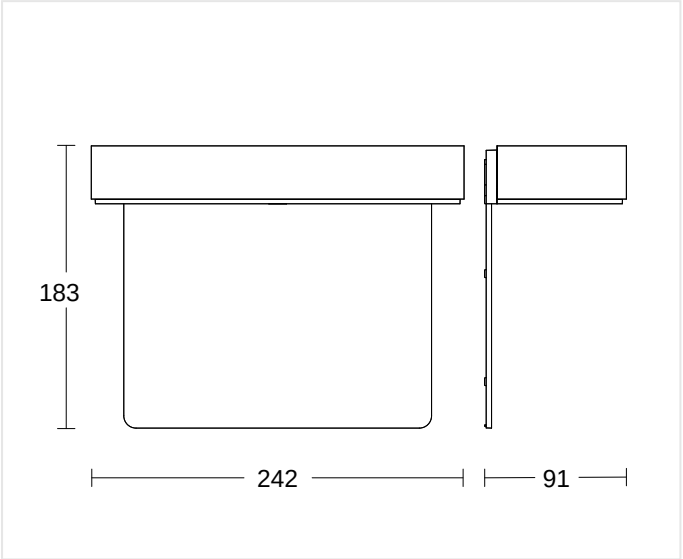


91 x 242 x 183 mm

### MOUNTING HEIGHT


| 1,80 – 2,50 m | 2,50 m |
| --- | --- |
| BEREICH | MAX |

# My XSolar SOL-0 HN Anthracite


**SOLAR LIGHT**

EAN 4007841065881

## Highlights

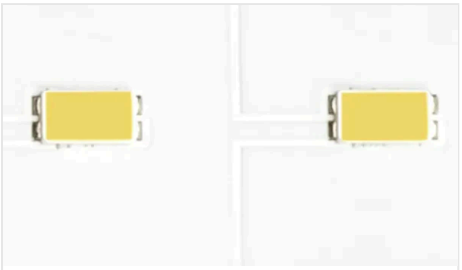


Including STEINEL LED system

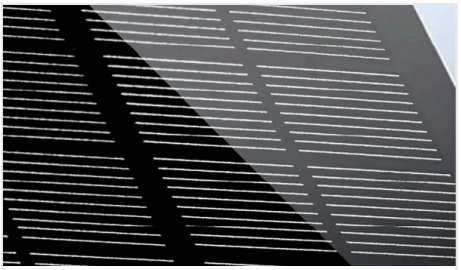

High-quality monocrystalline solar panel




Includes lithium iron-phosphate rechargeable battery

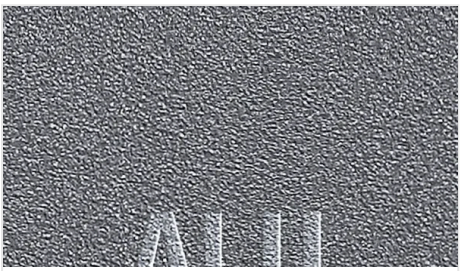

High-quality aluminium

# My XSolar SOL-O HN Anthracite

SOLAR LIGHT

EAN 4007841065881

## Accessories

### ORDERING INFORMATION

| | |
|---|---|
| Art.-Nr. | 065881 |
| EAN | 4007841065881 |
| Typ | **My XSolar SOL-O HN Anthracite** |

neva lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss