

# L 910 without motion detector

**neva**  
**lux****OUTDOOR LIGHT WITHOUT SENSOR**

EAN 4007841078720

E-Nr. 941004609

- Outdoor light without motion detector, with effective lighting upwards and downwards (Up- & Downlight)
- Elegant and simple design, with pleasant ambient light on the wall
- Warm white light (3000 K) and long-life 9,8 W LEDs with 797 lm
- Incl. mounting accessories - plastic-free packaging

 **steinel**

86 x 80 x 235 mm



L 910 without motion detector

OUTDOOR LIGHT WITHOUT SENSOR

EAN 4007841078720

E-Nr. 941004609

Technical Data

|                             |  |                                              |  |                         |                              |  |                                                              |
|-----------------------------|--|----------------------------------------------|--|-------------------------|------------------------------|--|--------------------------------------------------------------|
| DIMENSIONS                  |  | With illuminant                              |  | Yes, STEINEL LED system | Ambient temperature          |  | from -20 up to 40 °C                                         |
| Dimensions L x W x H        |  | Illuminant                                   |  | LED cannot be replaced  | Housing material             |  | Aluminium                                                    |
| 86 x 80 x 235 mm            |  | Base                                         |  | without                 | Cover material               |  | Plastic, opal                                                |
| ELECTRICAL                  |  | LED cooling system                           |  | Passive Thermo Control  | Mounting location            |  | wall                                                         |
| Mains connection            |  | Soft light start                             |  | No                      | Application location         |  | Outdoors                                                     |
| 220 – 240 V / 50 – 60 Hz    |  | LIFETIME                                     |  |                         | Mounting type                |  | Surface wiring                                               |
| Power                       |  | LED lifetime L70B50 25°C                     |  | > 60000 h               | Application room             |  | all round the building front door outdoors terrace / balcony |
| 9,8 W                       |  | Average rated power supply lifetime at 25 °C |  | > 60000 h               | Colour                       |  | Anthracite                                                   |
| SENSOR TECHNOLOGY           |  | Luminous flux decline per LM80               |  | L70B50                  | SCOPE OF DELIVERY & WARRANTY |  |                                                              |
| With motion detector        |  | SETTINGS                                     |  |                         | Manufacturer warranty        |  | 3 years                                                      |
| No                          |  | With remote control                          |  | No                      | House number sheet included  |  | No                                                           |
| CONNECTIVITY                |  | HOUSING & MATERIAL                           |  |                         | CERTIFICATES & EPREL         |  |                                                              |
| Networking                  |  | Impact resistance                            |  | IK03                    | Certificates                 |  | TÜV                                                          |
| No                          |  | Protection class (IP)                        |  | IP44                    | EPREL category               |  | Surrounded product with integrated light source              |
| LIGHTING TECHNOLOGY         |  | Protection class                             |  | II                      |                              |  |                                                              |
| Measured luminous flux 360° |  |                                              |  |                         |                              |  |                                                              |
| 797 lm                      |  |                                              |  |                         |                              |  |                                                              |
| Efficiency                  |  |                                              |  |                         |                              |  |                                                              |
| 81 lm/W                     |  |                                              |  |                         |                              |  |                                                              |
| Colour temperature          |  |                                              |  |                         |                              |  |                                                              |
| 3000 K                      |  |                                              |  |                         |                              |  |                                                              |
| LED colour deviation        |  |                                              |  |                         |                              |  |                                                              |
| SDCM3                       |  |                                              |  |                         |                              |  |                                                              |
| Colour rendering index      |  |                                              |  |                         |                              |  |                                                              |
| 80-89                       |  |                                              |  |                         |                              |  |                                                              |


# L 910 without motion detector

OUTDOOR LIGHT WITHOUT SENSOR

EAN 4007841078720  
E-Nr. 941004609

## Illustrations

### TECHNICAL DRAWINGS

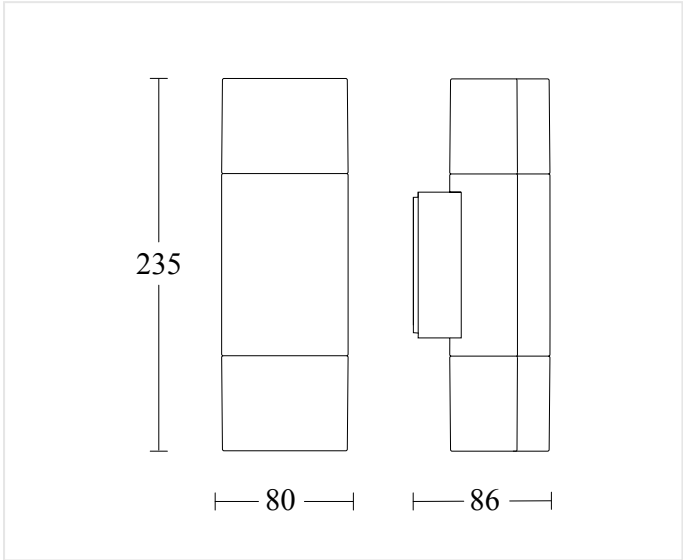

86 x 80 x 235 mm

# L 910 without motion detector

OUTDOOR LIGHT WITHOUT SENSOR

EAN 4007841078720

E-Nr. 941004609

## Highlights



Including STEINEL LED system



Effect lighting on the wall



High-quality aluminium

L 910 without motion detector

OUTDOOR LIGHT WITHOUT SENSOR

EAN 4007841078720

E-Nr. 941004609

Accessories

|                      |                               |                                |  |
|----------------------|-------------------------------|--------------------------------|--|
| ORDERING INFORMATION |                               | <div>neva</div> <div>lux</div> |  |
| Art.-Nr.             | 078720                        | nevalux AG                     |  |
| EAN                  | 4007841078720                 | Neugrütstrasse 2               |  |
| E-Number             | 941004609                     | 8610 Uster                     |  |
| Typ                  | L 910 without motion detector | +41 44 508 78 78               |  |
|                      |                               | info@nevalux.swiss             |  |