# RS PRO Connect R20 Q SL warm white

**INDOOR LIGHT WITHOUT SENSOR**

EAN **4007841057176**
E-Nr. **941301479**

- Including STEINEL LED system
- Interconnectable and adjustable via Bluetooth
- Impact-resistant material rated to IK07
- Backlight function
- Optional main light level 50 - 100%
- Modern plug-in terminals for straightforward installation

55 x 300 x 300 mm



# RS PRO Connect R20 Q SL warm white

**INDOOR LIGHT WITHOUT SENSOR**

EAN **4007841057176**
E-Nr. **941301479**

## Technical Data

### IDENTIFICATION

| | |
|---|---|
| Variant | **warm white** |

### DIMENSIONS

| | |
|---|---|
| Dimensions L × W × H | **55 x 300 x 300 mm** |

### ELECTRICAL

| | |
|---|---|
| Mains connection | **220 – 240 V / 50 – 60 Hz** |
| Power | **16 W** |

### SENSOR TECHNOLOGY

| | |
|---|---|
| With motion detector | **No** |

### CONNECTIVITY

| | |
|---|---|
| Control technology | **On/Off-Leuchte** |

### LIGHTING TECHNOLOGY

| | |
|---|---|
| Colour temperature | **3000 K** |
| LED colour deviation | **SDCM3** |
| Colour rendering index | **80-89** |
| With illuminant | **Yes, STEINEL LED system** |
| Illuminant | **LED cannot be replaced** |
| Base | **without** |
| LED cooling system | **Passive Thermo Control** |
| Soft light start | **Yes** |
| Continuous light | **selectable** |
| Luminous flux | **1900 lm** |

### LIFETIME

| | |
|---|---|
| LED lifetime max. °C | **50000 h** |
| Luminous flux decline per LM80 | **L80B50** |
| LED lifespan (25 °C) | **60000 h** |

### SETTINGS

| | |
|---|---|
| Twilight switch | **No** |
| Base light function detail | **LED Backlight** |
| Functions | **Backlight** |
| Settings via | **Bluetooth** |
| With remote control | **No** |

### HOUSING & MATERIAL

| | |
|---|---|
| Impact resistance | **IK07** |
| Protection class (IP) | **IP40** |
| Protection class | **II** |
| Ambient temperature | **-20 – 40 °C** |
| Housing material | **Plastic** |
| Cover material | **PC, opal** |

### SCOPE OF DELIVERY & WARRANTY

| | |
|---|---|
| Manufacturer warranty | **5 years** |


# RS PRO Connect R20 Q SL warm white

**INDOOR LIGHT WITHOUT SENSOR**

EAN **4007841057176**
E-Nr. **941301479**

## Illustrations

### TECHNICAL DRAWINGS

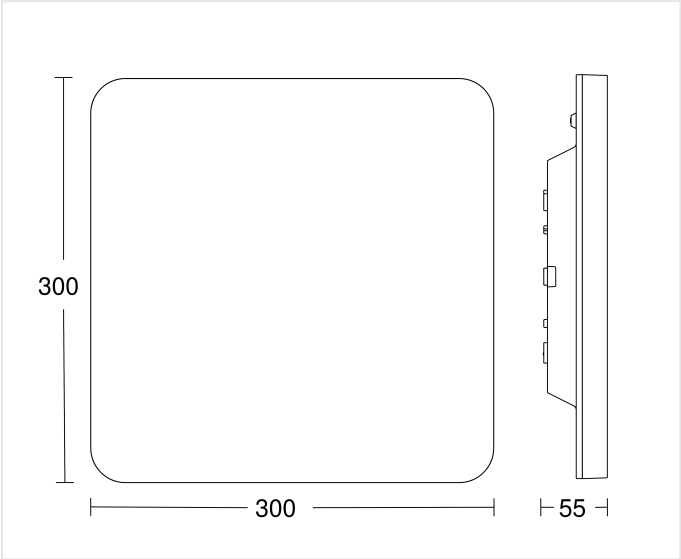


55 x 300 x 300 mm


# RS PRO Connect R20 Q SL warm white

**INDOOR LIGHT WITHOUT SENSOR**

EAN **4007841057176**
E-Nr. **941301479**


## Wiring Diagrams

**WIRING DIAGRAM 1**

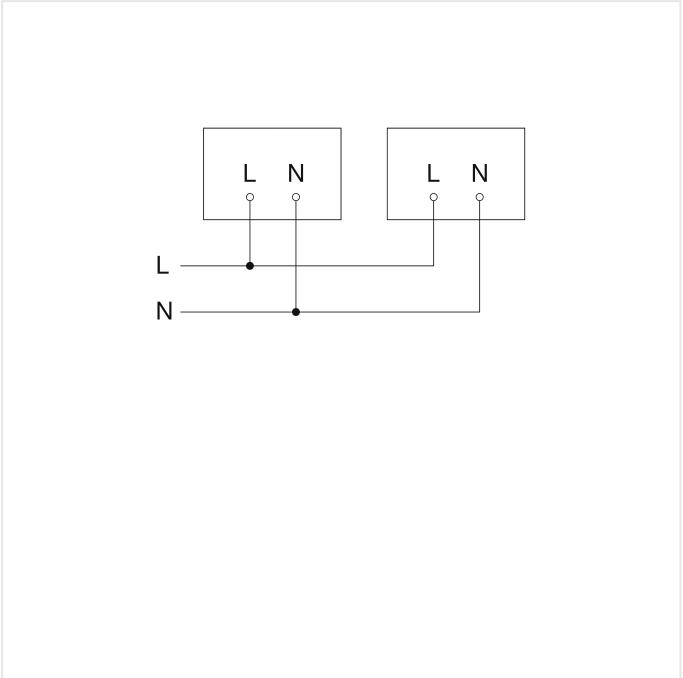


Slave/wireless master interconnection circuit diagram

**WIRING DIAGRAM 2**

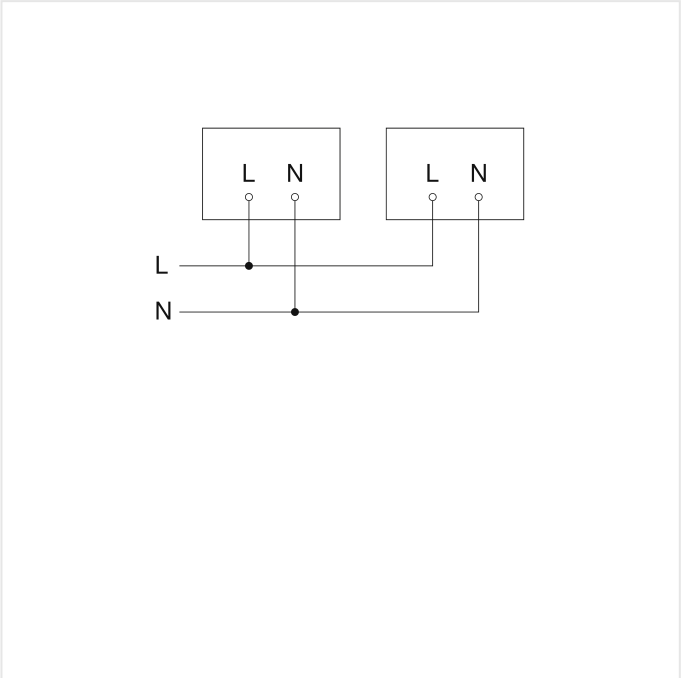


Master/master interconnection circuit diagram

# RS PRO Connect R20 Q SL warm white

INDOOR LIGHT WITHOUT SENSOR

EAN **4007841057176**
E-Nr. **941301479**

## Accessories

| | ARTICLE NUMBER | DESCRIPTION | CATEGORY |
|---|---|---|---|
|  | 4007841057183 | **RS PRO Connect R20 Q warmweiss** | Sensor-switched indoor light |

### ORDERING INFORMATION

| | |
|---|---|
| Art.-Nr. | 4007841057176 |
| EAN | 4007841057176 |
| E-Number | 941301479 |
| Typ | **RS PRO Connect R20 Q SL warm white** |

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss