

HF 360-2 KNX - Concealed wiring

PRESENCE DETECTOR

neva
lux

EAN 4007841064303

E-Nr. 535931508

● steinel

60 x 103 x 103 mm



HF 360-2 KNX - Concealed wiring

PRESENCE DETECTOR

EAN 4007841064303

E-Nr. 535931508

Technical Data

IDENTIFICATION			SETTINGS		
Version		Presence detector	Twilight switch		Yes
DIMENSIONS			Twilight setting		2 – 1000 lx
Dimensions L x W x H		60 x 103 x 103 mm	Time setting		10 s – 1092 Min.
ELECTRICAL			Base light function		Yes
Mains connection		30 V	Main light adjustable		0 - 100 %
Supply voltage detail		KNX bus	Settings via		ETS software Bluetooth Bus
SENSOR TECHNOLOGY			With remote control		No
Max. mounting height		4,00 m	Twilight setting teach		Yes
Sensor technology		High frequency	HOUSING & MATERIAL		
Transmission power		< 1 mW	Protection class (IP)		IP20
HF technology		5,8 GHz	Ambient temperature		from -25 up to 50 °C
With motion detector		Yes	Mounting location		ceiling
Detection		also through glass, wood and stud walls	Application location		Indoors
Detection angle		360 °	Mounting type		Concealed wiring
Opening angle		140 °	Material		Plastic
Sneak-under protection		Yes	Application room		Indoors WC / washroom function room / ancillary room kitchenette stairwell
Segment-by-segment masking		No	Colour		white
Electronic scalability		Yes	RAL colour		9003
Mechanical scalability		No	SCOPE OF DELIVERY & WARRANTY		
			Manufacturer warranty		5 years
			Corner wall bracket included		No
Range detail					
		1 or 2 detection directions can be masked out by stickers for adjustment to the room situation.			
Radial range		Ø 12 m (113 m²)			
Tangential range		Ø 12 m (113 m²)			
Mounting height		2,50 – 4,00 m			
Optimal mounting height		2,8 m			
CONNECTIVITY					
Networking		Yes			
Type of networking		Master/master Master/slave			
Networking via		KNX bus			
KNX functions		Comfort Photo-cell controller Individual pyro evaluation Basic light level function Light level HVAC output Constant-lighting control Light output 4x Humidity output Presence output Day / night function Dewpoint Temperature output Logic gate			
With bus coupler		Yes			
LIGHTING TECHNOLOGY					
Soft light start		Yes			
Continuous light		selectable			
Constant light regulation		Yes			

HF 360-2 KNX - Concealed wiring


PRESENCE DETECTOR

EAN 4007841064303

E-Nr. 535931508

Illustrations

TECHNICAL DRAWINGS

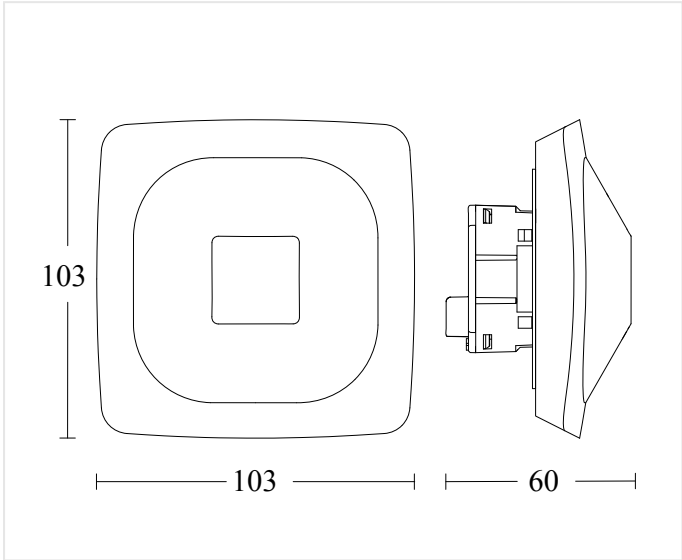

60 x 103 x 103 mm

MOUNTING HEIGHT

2,50 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------------	------------------	---------------

HF 360-2 KNX - Concealed wiring

PRESENCE DETECTOR

EAN 4007841064303

E-Nr. 535931508

Highlights



UV-resistant plastic

HF 360-2 KNX - Concealed wiring

PRESENCE DETECTOR

EAN **4007841064303**

E-Nr. **535931508**

Accessories

ORDERING INFORMATION

Art.-Nr.	064303
EAN	4007841064303
E-Number	535931508
Typ	HF 360-2 KNX - Concealed wiring

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss