

DL Vario Quattro S white

SENSOR-SWITCHED LED OUTDOOR LIGHT

neva
lux

EAN 4007841035440

E-Nr. 941300129

- Outdoor ceiling light with four integrated motion detectors
- Mounting height up to 6m, particularly impact-resistant material
- Automatic light thanks to four 90° infrared sensors, each individually adjustable from 2-8m
- Functions: adjustable basic light, 4 hours continuous light
- Warm white light (3000 K) and long-life 9,8 W LEDs with 1000 lm
- Incl. mounting accessories - plastic-free packaging

● steinel

310 x 69 mm



DL Vario Quattro S white

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN 4007841035440

E-Nr. 941300129

Technical Data

DIMENSIONS

Dimensions Ø x H

310 x 69 mm

ELECTRICAL

Mains connection

220 – 240 V / 50 – 60 Hz

Power

9,8 W

SENSOR TECHNOLOGY

Max. mounting height

6,00 m

Sensor technology

passive infrared

With motion detector

Yes

Detection angle

360 °

Opening angle

160 °

Sneak-under protection

Yes

Segment-by-segment masking

Yes

Electronic scalability

No

Mechanical scalability

Yes

Range detail

Reach adjustable from 2 - 8 m in 4 directions (90° in each)

Radial range

4 x 4 m (16 m²)

Tangential range

16 x 16 m (256 m²)

Mounting height

2 – 6 m

Optimal mounting height

2,8 m

CONNECTIVITY

Networking

No

Slave mode adjustable

No

LIGHTING TECHNOLOGY

Measured luminous flux 360°

1000 lm

Efficiency

102 lm/W

Colour temperature

3000 K

LED colour deviation

SDCM3

Colour rendering index

80-89

With illuminant

Yes, STEINEL LED system

Illuminant

LED cannot be replaced

Base

without

LED cooling system

Passive Thermo Control

Soft light start

Yes

Continuous light

selectable, 4h

LIFETIME

LED lifetime max. °C

50000 h

LED lifetime L70B50 25°C

> 60000 h

SETTINGS

Twilight switch

Yes

Twilight setting

2 – 1000 lx

Time setting

5 s – 30 Min.

Base light function

Yes

Base light function time

10/30 min, all night

Main light adjustable

No

Settings via

Potentiometers

With remote control

No

Twilight setting teach

No

Base light function in percent

10 %

Base light function percent from

10 %

HOUSING & MATERIAL

Impact resistance

IK07

Protection class (IP)

IP54

Protection class

II

Ambient temperature

from -20 up to 35 °C

Housing material

Plastic

Cover material

Plastic, structured

Mounting location

ceiling

Application location

Outdoors

Mounting type

Surface wiring

Material

Plastic

Application room

Indoors corridor / aisle
courtyard & driveway front
door function room /
ancillary room outdoors
stairwell

Colour

white

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty

3 years

CERTIFICATES & EPREL

Certificates

DEKRA EMC

EPREL category

Surrounded product with
integrated light source

DL Vario Quattro S white


SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN 4007841035440

E-Nr. 941300129

Illustrations

TECHNICAL DRAWINGS

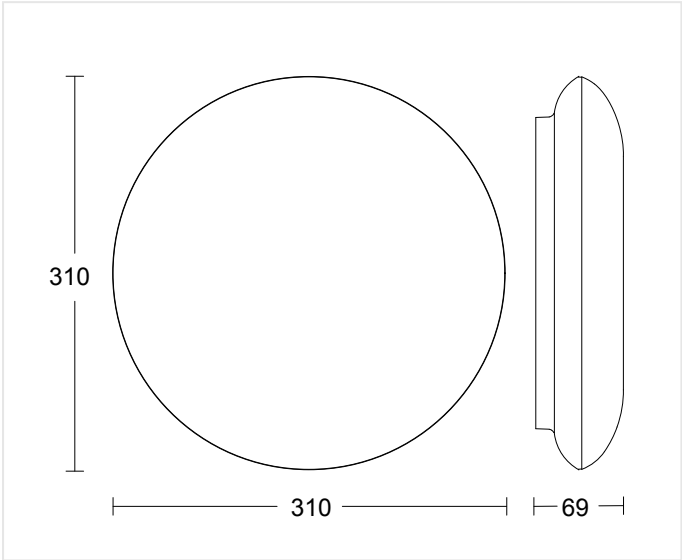

310 x 69 mm

MOUNTING HEIGHT

2 – 6 m BEREICH	2,8 m OPTIMAL	6,00 m MAX
---------------------------------------	-------------------------------------	----------------------------------


DL Vario Quattro S white

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN 4007841035440
E-Nr. 941300129

Wiring Diagrams

WIRING DIAGRAM 1

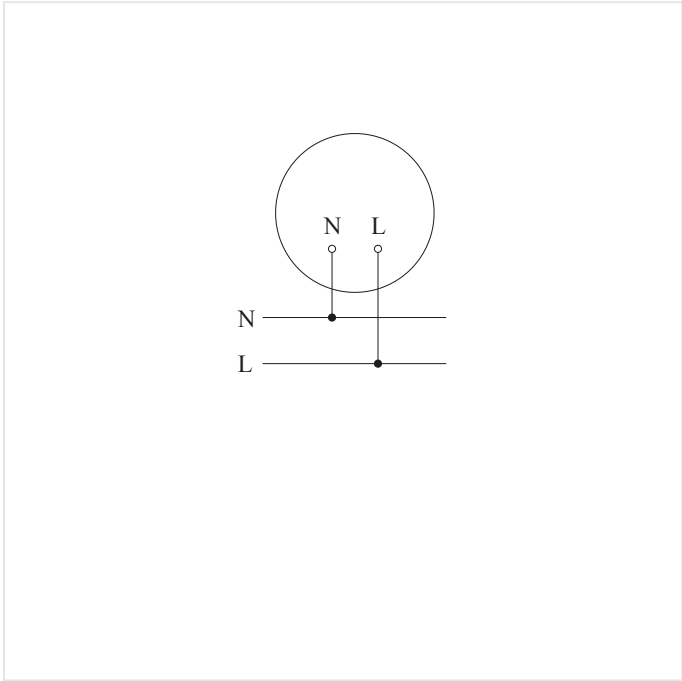

Circuit diagram

DL Vario Quattro S white

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN 4007841035440

E-Nr. 941300129


Highlights



Including STEINEL LED system



Integrated sensor lenses

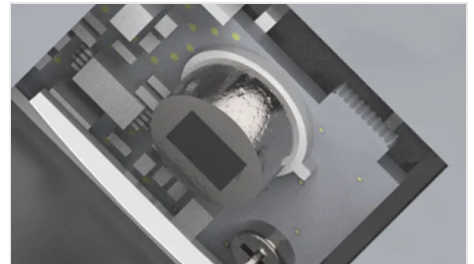


4 infrared sensors adjustable in every direction



Reach adjusts in 4 directions



4-hour manual override (optional)

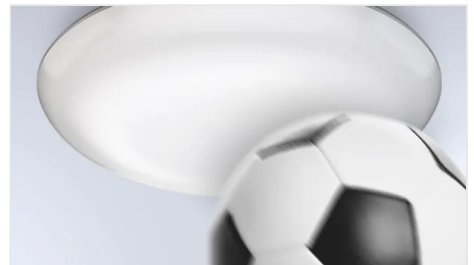

Impact-resistant material rated to IK07

DL Vario Quattro S white

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN **4007841035440**
E-Nr. **941300129**

Accessories

ORDERING INFORMATION

Art.-Nr.	035440
EAN	4007841035440
E-Number	941300129
Typ	DL Vario Quattro S white

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss