# IS 3360 DALI-2 Input Device - concealed, sq.

**PRESENCE DETECTOR**

EAN 4007841057244
E-Nr. 535943105

steinel

78 x 94 x 94 mm



# IS 3360 DALI-2 Input Device - concealed, sq.

**PRESENCE DETECTOR**

EAN **4007841057244**
E-Nr. **535943105**

## Technical Data

### IDENTIFICATION

| | |
|---|---|
| Version | **Motion and Presence Detector** |

### DIMENSIONS

| | |
|---|---|
| Dimensions L × W × H | **78 x 94 x 94 mm** |

### ELECTRICAL

| | |
|---|---|
| Mains connection | **12 – 22,5 V / 50 – 60 Hz** |
| Supply voltage detail | **DALI bus** |
| Switching output 1 potential-free | **No** |
| Control output DALI | **Addressable/slave** |

### SENSOR TECHNOLOGY

| | |
|---|---|
| Max. mounting height | **4,00 m** |
| Sensor technology | **passive infrared** |
| With motion detector | **Yes** |
| Detection angle | **360 °** |
| Opening angle | **180 °** |
| Sneak-under protection | **Yes** |
| Segment-by-segment masking | **Yes** |
| Electronic scalability | **No** |
| Mechanical scalability | **No** |
| Radial range | **Ø 8 m (50 m²)** |
| Tangential range | **Ø 40 m (1257 m²)** |
| Switching zones | **1416 switching zones** |
| Mounting height | **2,5 – 4,00 m** |
| Presence range | **Ø 3 m (7 m²)** |
| Optimal mounting height | **2,8 m** |

### CONNECTIVITY

| | |
|---|---|
| Networking | **Yes** |
| Type of networking | **Master/slave** |
| Number of DALI participants | **3** |
| With bus coupler | **Yes** |
| Networking via | **DALI 2** |

### LIGHTING TECHNOLOGY

| | |
|---|---|
| Soft light start | **No** |
| Constant light regulation | **No** |

### SETTINGS

| | |
|---|---|
| Twilight switch | **Yes** |
| Twilight setting | **2 – 1000 lx** |
| Base light function | **No** |
| Main light adjustable | **No** |
| Settings via | **Bus** |
| With remote control | **No** |
| Twilight setting teach | **No** |

### HOUSING & MATERIAL

| | |
|---|---|
| Protection class (IP) | **IP20** |
| Ambient temperature | **from -20 up to 50 °C** |
| Mounting location | **ceiling** |
| Application location | **Indoors** |
| Mounting type | **Concealed wiring** |
| Material | **Plastic** |
| Application room | **Indoors WC / washroom changing room function room / ancillary room multi-storey / underground car park production facilities reception / lobby recreation room sports hall stairwell warehouse** |
| Colour | **white** |
| RAL colour | **9003** |

### SCOPE OF DELIVERY & WARRANTY

| | |
|---|---|
| Manufacturer warranty | **5 years** |
| Corner wall bracket included | **No** |

### CERTIFICATES & EPREL

| | |
|---|---|
| Certificates | **DALI-2** |


# IS 3360 DALI-2 Input Device - concealed, sq.

**PRESENCE DETECTOR**

EAN **4007841057244**
E-Nr. **535943105**

## Illustrations

### TECHNICAL DRAWINGS

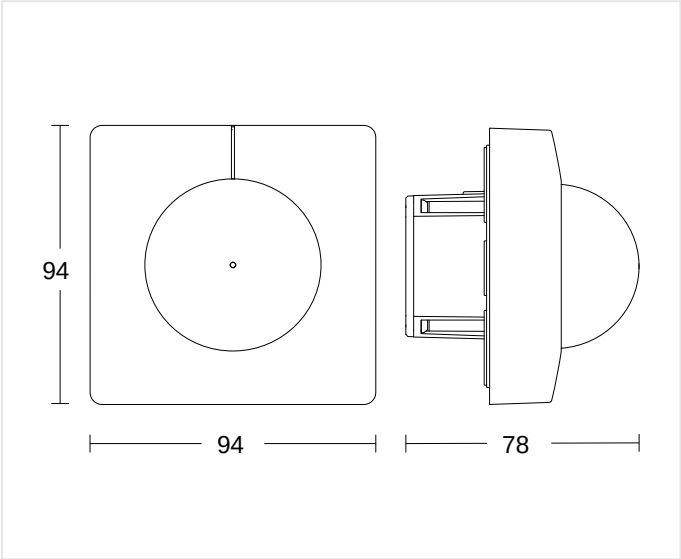


78 x 94 x 94 mm

### MOUNTING HEIGHT

| 2,5 – 4,00 m | 2,8 m | 4,00 m |
|---|---|---|
| BEREICH | OPTIMAL | MAX |


# IS 3360 DALI-2 Input Device - concealed, sq.

**PRESENCE DETECTOR**

EAN **4007841057244**
E-Nr. **535943105**

## Wiring Diagrams

### WIRING DIAGRAM 1

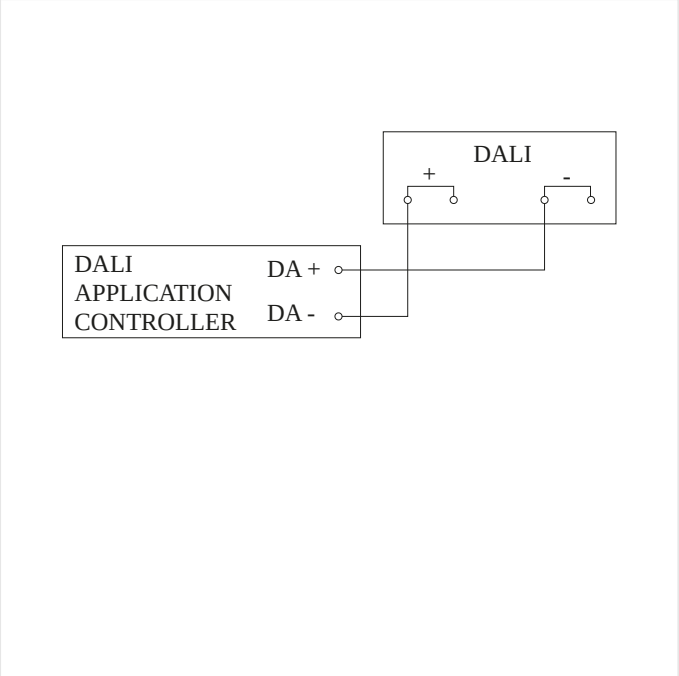


Circuit diagram

# IS 3360 DALI-2 Input Device - concealed, sq.

**PRESENCE DETECTOR**

EAN **4007841057244**
E-Nr. **535943105**

## Highlights




**UV-resistant plastic**

# IS 3360 DALI-2 Input Device - concealed, sq.

PRESENCE DETECTOR

EAN 4007841057244
E-Nr. 535943105

## Accessories

| | ARTICLE NUMBER | DESCRIPTION | CATEGORY |
|---|---|---|---|
|  | 4007841009151 | **Smart Remote** | Accessory |
|  | 4007841056728 | **Schwarze Blende für IR-Sensoren Unterputz eckig** | Accessory |
|  | 4007841056742 | **Schwarze Blende für IR-Sensoren Unterputz rund** | Accessory |

### ORDERING INFORMATION

| | |
|---|---|
| Art.-Nr. | 057244 |
| EAN | 4007841057244 |
| E-Number | 535943105 |
| Typ | **IS 3360 DALI-2 Input Device - concealed, sq.** |

neva lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss