

# L 400 S black

E27 SENSOR-SWITCHED OUTDOOR LIGHT

neva  
lux

EAN 4007841611019

E-Nr. 924360009

● steinel

250 x 215 x 336 mm



L 400 S black

E27 SENSOR-SWITCHED OUTDOOR LIGHT

EAN 4007841611019

E-Nr. 924360009

Technical Data

| DIMENSIONS                 |                          |
|----------------------------|--------------------------|
| Dimensions L x W x H       | 250 x 215 x 336 mm       |
| ELECTRICAL                 |                          |
| Mains connection           | 220 – 240 V / 50 – 60 Hz |
| Power                      | 60 W                     |
| Own consumption            | 0,8 W                    |
| SENSOR TECHNOLOGY          |                          |
| Max. mounting height       | 6,00 m                   |
| Sensor technology          | passive infrared         |
| With motion detector       | Yes                      |
| Detection angle            | 240 °                    |
| Opening angle              | 180 °                    |
| Sneak-under protection     | Yes                      |
| Segment-by-segment masking | Yes                      |
| Electronic scalability     | No                       |
| Mechanical scalability     | No                       |
| Radial range               | r = 3 m (19 m²)          |
| Tangential range           | r = 12 m (302 m²)        |
| Mounting height            | 1,80 – 6,00 m            |

| Optimal mounting height        | 2 m              |
|--------------------------------|------------------|
| CONNECTIVITY                   |                  |
| Networking                     | No               |
| Slave mode adjustable          | No               |
| LIGHTING TECHNOLOGY            |                  |
| With illuminant                | No               |
| Illuminant                     | All-purpose lamp |
| Base                           | E27              |
| Soft light start               | Yes              |
| Continuous light               | selectable, 4h   |
| SETTINGS                       |                  |
| Twilight switch                | Yes              |
| Twilight setting               | 2 – 2000 lx      |
| Time setting                   | 5 s – 15 Min.    |
| Base light function            | Yes              |
| Settings via                   | Potentiometers   |
| With remote control            | No               |
| Base light function in percent | 0 – 50 %         |

| Base light function percent from   | 0 %                                                                                     |
|------------------------------------|-----------------------------------------------------------------------------------------|
| HOUSING & MATERIAL                 |                                                                                         |
| Impact resistance                  | IK03                                                                                    |
| Protection class (IP)              | IP44                                                                                    |
| Protection class                   | II                                                                                      |
| Ambient temperature                | from -20 up to 40 °C                                                                    |
| Housing material                   | Plastic                                                                                 |
| Cover material                     | Glass transparent                                                                       |
| Cover material (scope of delivery) | shrouds                                                                                 |
| Mounting location                  | wall                                                                                    |
| Application location               | Outdoors                                                                                |
| Mounting type                      | Surface wiring                                                                          |
| Application room                   | all round the building<br>courtyard & driveway front<br>door outdoors terrace / balcony |
| Colour                             | black                                                                                   |
| SCOPE OF DELIVERY & WARRANTY       |                                                                                         |
| Manufacturer warranty              | 5 years                                                                                 |

L 400 S black


E27 SENSOR-SWITCHED OUTDOOR LIGHT

EAN 4007841611019

E-Nr. 924360009

Illustrations

TECHNICAL DRAWINGS

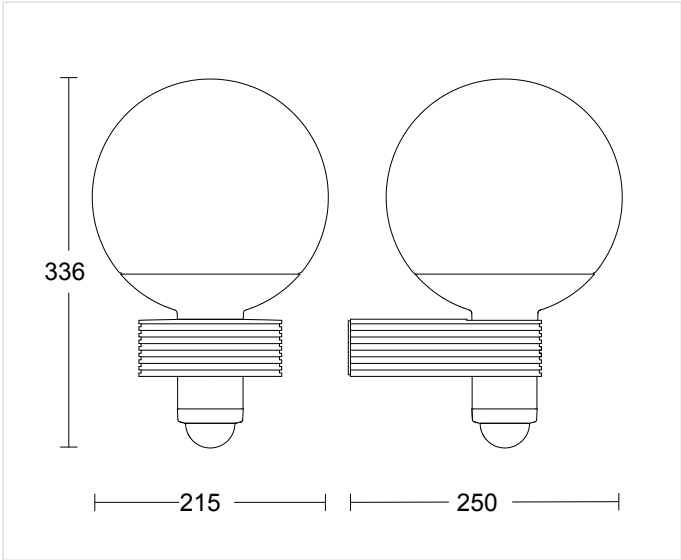

250 x 215 x 336 mm

MOUNTING HEIGHT

|                          |                |               |
|--------------------------|----------------|---------------|
| 1,80 – 6,00 m<br>BEREICH | 2 m<br>OPTIMAL | 6,00 m<br>MAX |
|--------------------------|----------------|---------------|

# L 400 S black


E27 SENSOR-SWITCHED OUTDOOR LIGHT

EAN 4007841611019

E-Nr. 924360009

## Wiring Diagrams

### WIRING DIAGRAM 1

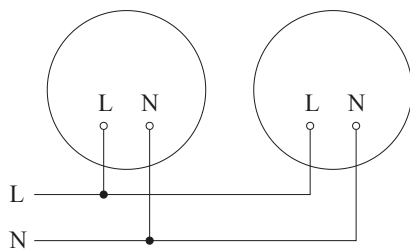

Slave/wireless master interconnection circuit diagram

# L 400 S black

E27 SENSOR-SWITCHED OUTDOOR LIGHT

EAN 4007841611019

E-Nr. 924360009

## Highlights



Crystal glass shade



Optional basic lighting level 0 - 50 %



UV-resistant plastic

L 400 S black

E27 SENSOR-SWITCHED OUTDOOR LIGHT

EAN 4007841611019

E-Nr. 924360009

Accessories

| ARTICLE NUMBER                                                                                                       | DESCRIPTION      | CATEGORY  |
|----------------------------------------------------------------------------------------------------------------------|------------------|-----------|
| <div></div> <div>4007841630317</div> | Eckwandhalter 03 | Accessory |

| ORDERING INFORMATION |               |
|----------------------|---------------|
| Art.-Nr.             | 611019        |
| EAN                  | 4007841611019 |
| E-Number             | 924360009     |
| Typ                  | L 400 S black |

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss