PD-24 ECO DALI-2 Input Device - surface white

MOTION AND PRESENCE DETECTOR

EAN **4007841088231**

- Our series for the common ranges
- Presence detector with 24 m motion detection and 7.5 m presence detection for integration into a DALI-2 lighting management system
- Ideal for large offices, meeting rooms or passageways
- Easy to mount due to magnetic holder and round design
- Transmission of the presence and brightness value information to a DALI-2 Application Controller or a BMS
- Including pluggable cover caps for detection limitation
- External approval and measurement according to sensNORM and DALI-2 certified according to IEC 62386

steinel

129 x 70 mm



PD-24 ECO DALI-2 Input Device - surface white

MOTION AND PRESENCE DETECTOR

EAN 4007841088231

Technical Data

IDENTIFICATION

Version	Motion and Presence Detector

DIMENSIONS

Dimensions Ø × H	129 x 70 mm

ELECTRICAL

Supply voltage detail	DALI bus

SENSOR TECHNOLOGY

Max. mounting height	10,00 m
Sensor technology	passive infrared
With motion detector	Yes
Detection angle	360 °
Segment-by-segment masking	Yes
Electronic scalability	No
Mechanical scalability	No
Radial range	Ø 5.5 m (24 m²)
Tangential range	Ø 24 m (452 m²)
Switching zones	1436 switching zones
Mounting height	2 – 10,00 m
Presence range	Ø 7.5 m (44 m²)
Optimal mounting height	2,8 m

CONNECTIVITY

Type of networking	Master/master
Control technology	On/Off-Leuchte

SETTINGS

Functions	Motions sensor Light sensor Presence function Presence detector logic
Settings via	Bus
With remote control	No

HOUSING & MATERIAL

Protection class (IP)	IP54
Ambient temperature	from -20 up to 50 °C
Housing material	Plastic
Cover material	Other
Cover material (scope of delivery)	shrouds
Mounting location	ceiling
Application location	Indoors
Mounting type	Surface wiring
Material	Plastic
Application room	Indoors function room / ancillary room one-person office warehouse
Colour	white

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	5 years
Corner wall bracket included	No

CERTIFICATES & EPREL

Certificates	DALI-2


PD-24 ECO DALI-2 Input Device - surface white

EAN 4007841088231

MOTION AND PRESENCE DETECTOR

Illustrations

TECHNICAL DRAWINGS

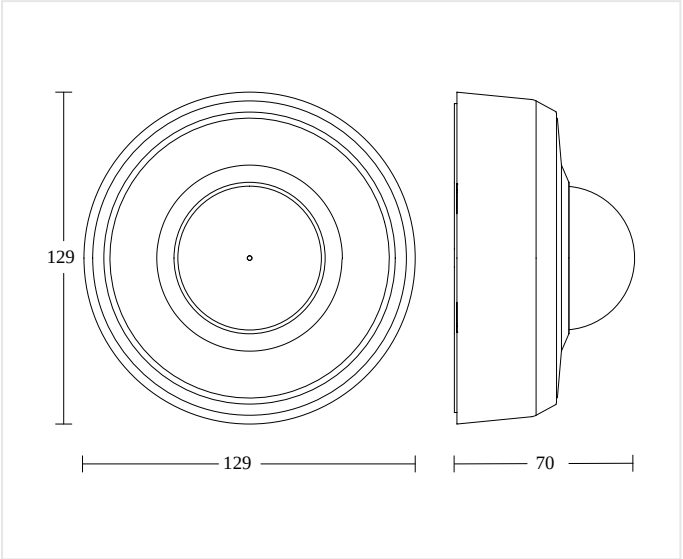

129 x 70 mm

MOUNTING HEIGHT

2 – 10,00 m	2,8 m	10,00 m
BEREICH	OPTIMAL	MAX


PD-24 ECO DALI-2 Input Device - surface white

EAN 4007841088231

MOTION AND PRESENCE DETECTOR


Wiring Diagrams

WIRING DIAGRAM 1

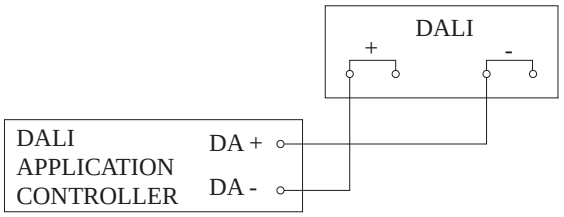

Circuit diagram

WIRING DIAGRAM 2

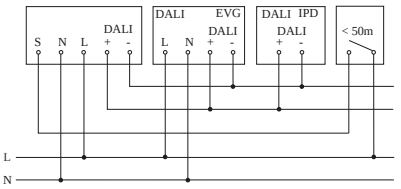

Circuit diagram for interconnecting DALI-2 APC with DALI-2 IPD

PD-24 ECO DALI-2 Input Device - surface white

MOTION AND PRESENCE DETECTOR

EAN 4007841088231

Accessories

	ARTICLE NUMBER	DESCRIPTION	CATEGORY
	4007841079543	**Deckeneinbau-Adapter Deckeneinbau**	Accessory
	4007841009151	**Smart Remote**	Accessory
	4007841592806	**Nutzer Fernbedienung RC5**	Accessory
	4007841559410	**Service Fernbedienung RC8**	Accessory

ORDERING INFORMATION

Art.-Nr.	088231
EAN	4007841088231
Typ	**PD-24 ECO DALI-2 Input Device - surface white**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss