RS PRO Connect R30 Q SL Neutral white

INDOOR LIGHT WITHOUT SENSOR

EAN **4007841057206**
E-Nr. **941301619**

- Including STEINEL LED system
- Interconnectable and adjustable via Bluetooth
- Impact-resistant material rated to IK07
- Backlight function
- Optional main light level 50 - 100%
- Modern plug-in terminals for straightforward installation

55 x 350 x 350 mm



RS PRO Connect R30 Q SL Neutral white

INDOOR LIGHT WITHOUT SENSOR

EAN **4007841057206**
E-Nr. **941301619**

Technical Data

IDENTIFICATION

Variant	**Neutral white**

DIMENSIONS

Dimensions L × W × H	**55 x 350 x 350 mm**

ELECTRICAL

Mains connection	**220 – 240 V / 50 – 60 Hz**
Power	**24,5 W**

SENSOR TECHNOLOGY

With motion detector	**No**

CONNECTIVITY

Control technology	**On/Off-Leuchte**

LIGHTING TECHNOLOGY

Colour temperature	**4000 K**
LED colour deviation	**SDCM3**
Colour rendering index	**80-89**
With illuminant	**Yes, STEINEL LED system**
Illuminant	**LED cannot be replaced**
Base	**without**
LED cooling system	**Passive Thermo Control**
Soft light start	**Yes**
Continuous light	**selectable**
Luminous flux	**3150 lm**

LIFETIME

LED lifetime max. °C	**50000 h**
Luminous flux decline per LM80	**L80B50**
LED lifespan (25 °C)	**60000 h**

SETTINGS

Twilight switch	**No**
Base light function detail	**LED Backlight**
Functions	**Backlight**
Settings via	**Bluetooth**
With remote control	**No**

HOUSING & MATERIAL

Impact resistance	**IK07**
Protection class (IP)	**IP40**
Protection class	**II**
Ambient temperature	**-20 – 40 °C**
Housing material	**Plastic**
Cover material	**PC, opal**

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	**5 years**


RS PRO Connect R30 Q SL Neutral white

INDOOR LIGHT WITHOUT SENSOR

EAN **4007841057206**
E-Nr. **941301619**

Illustrations

TECHNICAL DRAWINGS

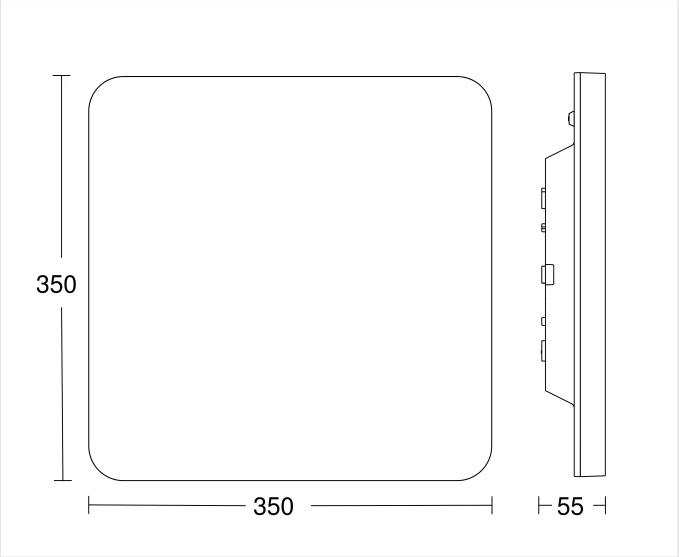

55 x 350 x 350 mm


RS PRO Connect R30 Q SL Neutral white

INDOOR LIGHT WITHOUT SENSOR

EAN **4007841057206**
E-Nr. **941301619**


Wiring Diagrams

WIRING DIAGRAM 1

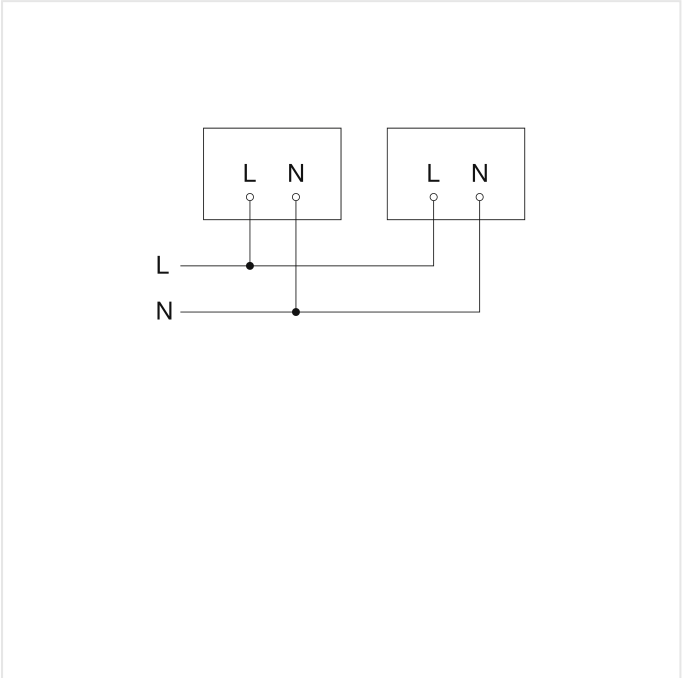

Slave/wireless master interconnection circuit diagram

WIRING DIAGRAM 2

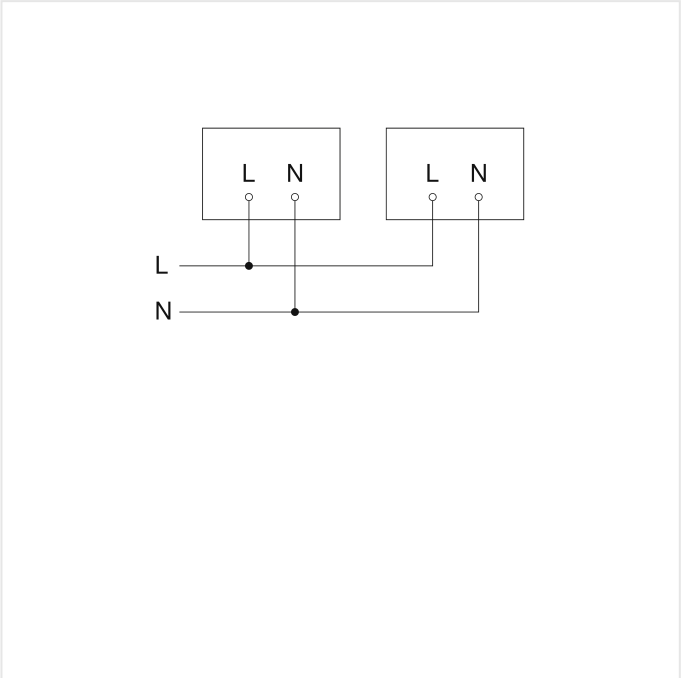

Master/master interconnection circuit diagram

RS PRO Connect R30 Q SL Neutral white

INDOOR LIGHT WITHOUT SENSOR

EAN **4007841057206**
E-Nr. **941301619**

Accessories

	ARTICLE NUMBER	DESCRIPTION	CATEGORY
	4007841057190	**RS PRO Connect R30 Q neutralweiss**	Sensor-switched indoor light

ORDERING INFORMATION

Art.-Nr.	4007841057206
EAN	4007841057206
E-Number	941301619
Typ	**RS PRO Connect R30 Q SL Neutral white**

neva lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss