

RS PRO T32 S warm white

SENSOR-SWITCHED LED INDOOR LIGHT

neva
lux

EAN 4007841091934

 **steinel**

322 x 68 mm



RS PRO T32 S warm white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841091934

Technical Data

DIMENSIONS				SETTINGS	
Dimensions Ø x H	322 x 68 mm	Mounting height	2 – 4 m	Twilight setting	2 – 2000 lx
ELECTRICAL		Optimal mounting height	2,8 m	Time setting	5 s – 15 Min.
Mains connection	220 – 240 V / 50 – 60 Hz	CONNECTIVITY		Base light function	No
Power	15,1 W	Networking	Yes	Main light adjustable	No
Switching output 1 low-voltage halogen lamps	800 VA	Networking via	Cable	HOUSING & MATERIAL	
LED lamps > 8 W	250 W	LIGHTING TECHNOLOGY		Impact resistance	IK03
Capacitive load in µF	88 µF	Measured luminous flux 360°	1608 lm	Protection class (IP)	IP54
Switching output 1 number of LED/fluorescent lamps	50 pcs.	Colour temperature	3000 K	Protection class	II
SENSOR TECHNOLOGY		With illuminant	Yes, STEINEL LED system	Ambient temperature	from -10 up to 40 °C
Max. mounting height	4,00 m	Illuminant	LED cannot be replaced	Housing material	Plastic
Sensor technology	High frequency	Base	without	Cover material	Plastic, opal
With motion detector	Yes	LED cooling system	Passive Thermo Control	Mounting location	ceiling wall
Detection angle	360 °	Soft light start	Yes	Colour	white
Electronic scalability	Yes	LIFETIME		SCOPE OF DELIVERY & WARRANTY	
Mechanical scalability	No	LED lifetime max. °C	50000 h	Manufacturer warranty	5 years
Radial range	Ø 8 m (50 m²)	LED lifetime L70B50 25°C	> 60000 h	CERTIFICATES & EPREL	
Tangential range	Ø 8 m (50 m²)	Luminous flux decline per LM80	L80B10	Certificates	DEKRA
				EPREL category	Surrounded product with integrated light source


RS PRO T32 S warm white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841091934

Illustrations

TECHNICAL DRAWINGS

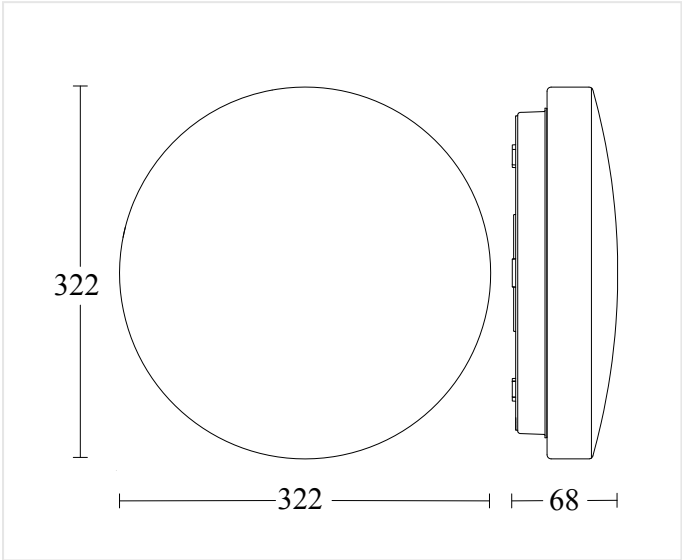

322 x 68 mm

MOUNTING HEIGHT

2 – 4 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------	------------------	---------------


RS PRO T32 S warm white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841091934


Wiring Diagrams

WIRING DIAGRAM 1

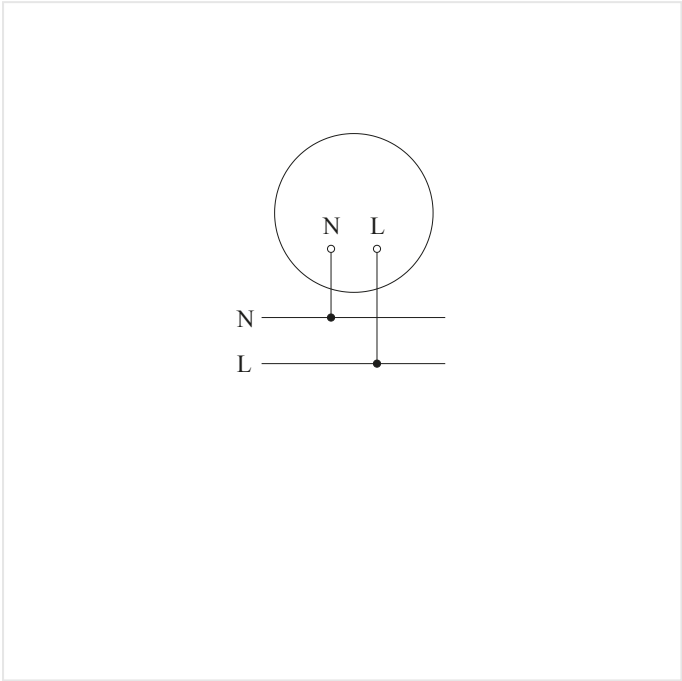

Master circuit diagram

WIRING DIAGRAM 2

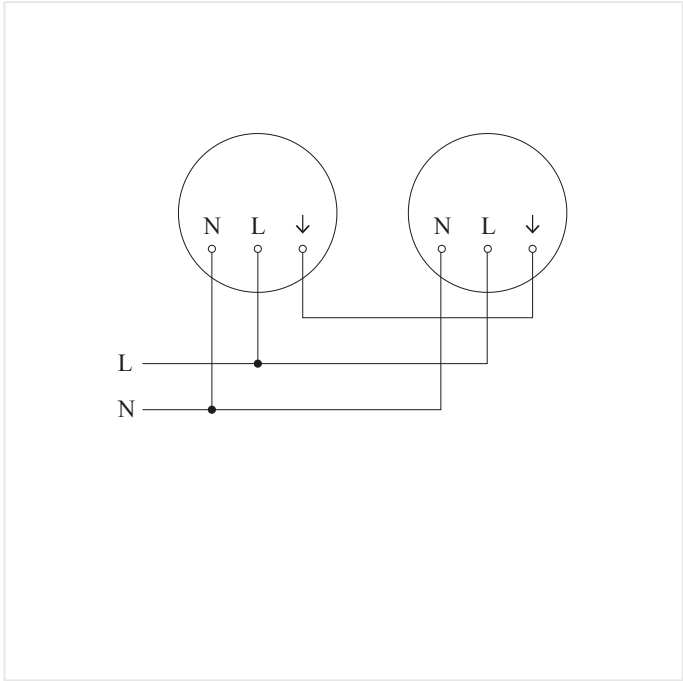

Master/master interconnection circuit diagram

RS PRO T32 S warm white


EAN 4007841091934

SENSOR-SWITCHED LED INDOOR LIGHT

Highlights



Including STEINEL LED system

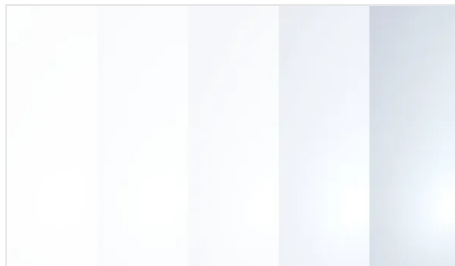

Intelligent soft light start



Interconnectable by cable (maximum of 10 units)

RS PRO T32 S warm white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841091934

Accessories

ORDERING INFORMATION

Art.-Nr.	091934
EAN	4007841091934
Typ	RS PRO T32 S warm white

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss