

IS 3360 DALI-2 APC - concealed, sq.

PRESENCE DETECTOR

neva
lux

EAN 4007841033514

E-Nr. 535945066

● steinel

78 x 94 x 94 mm



IS 3360 DALI-2 APC - concealed, sq.

PRESENCE DETECTOR

EAN 4007841033514
E-Nr. 535945066

Technical Data


IDENTIFICATION			Presence range		Ø 3 m (7 m²)	Base light function in percent		10 – 50 %	
Version	Motion and Presence Detector		Optimal mounting height		2,8 m	Base light function percent from		10 %	
DIMENSIONS			CONNECTIVITY			HOUSING & MATERIAL			
Dimensions L x W x H		78 x 94 x 94 mm	Networking		Yes	Protection class (IP)		IP20	
Type of networking			Master/slave			Ambient temperature		from -20 up to 50 °C	
Networking via			Cable			Mounting location		ceiling	
ELECTRICAL			LIGHTING TECHNOLOGY			Application location			Indoors
Mains connection		220 – 240 V / 50 – 60 Hz	Soft light start		Yes	Mounting type		Concealed wiring	
Control output DALI		Broadcast 1x30 electronic ballasts	Continuous light		selectable, 4h	Material		Plastic	
SENSOR TECHNOLOGY			Constant light regulation		Yes	Application room		Indoors WC / washroom changing room function room / ancillary room multi-storey / underground car park production facilities reception / lobby recreation room sports hall stairwell warehouse	
Max. mounting height		4,00 m	SETTINGS			Colour			white
Sensor technology		passive infrared	Twilight switch		Yes	RAL colour			9003
With motion detector		Yes	Twilight setting		2 – 1000 lx	SCOPE OF DELIVERY & WARRANTY			
Detection angle		360 °	Time setting		5 s – 15 Min.	Manufacturer warranty		5 years	
Opening angle		180 °	Base light function		Yes	Corner wall bracket included		No	
Sneak-under protection		Yes	Base light function time		1-30 min all night	CERTIFICATES & EPREL			
Segment-by-segment masking		Yes	Main light adjustable		50 - 100 %	Certificates			DALI-2
Electronic scalability		No	Functions		Normal / test mode Manual ON / ON-OFF Constant-lighting control ON-OFF				
Mechanical scalability		No	Settings via		Remote control Potentiometers Smart Remote				
Radial range		Ø 8 m (50 m²)	With remote control		No				
Tangential range		Ø 40 m (1257 m²)	Twilight setting teach		Yes				
Switching zones		1416 switching zones							
Mounting height		2,50 – 4,00 m							

IS 3360 DALI-2 APC - concealed, sq.
PRESENCE DETECTOR

EAN 4007841033514
E-Nr. 535945066

Illustrations

TECHNICAL DRAWINGS

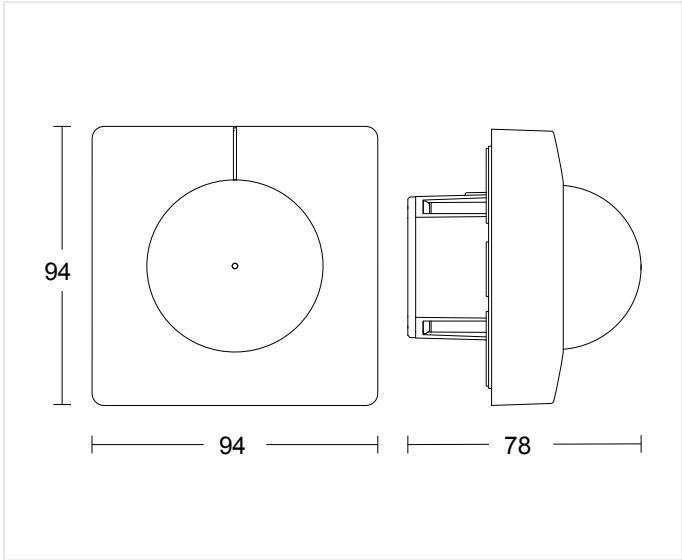

78 x 94 x 94 mm

MOUNTING HEIGHT


2,50 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------------	------------------	---------------

IS 3360 DALI-2 APC - concealed, sq.
PRESENCE DETECTOR

EAN 4007841033514
E-Nr. 535945066


Wiring Diagrams

WIRING DIAGRAM 1

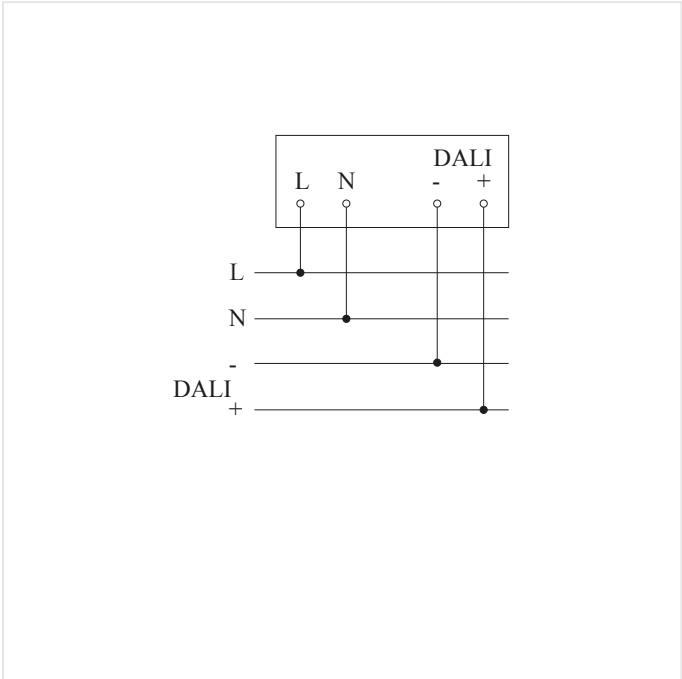

Master circuit diagram

WIRING DIAGRAM 2

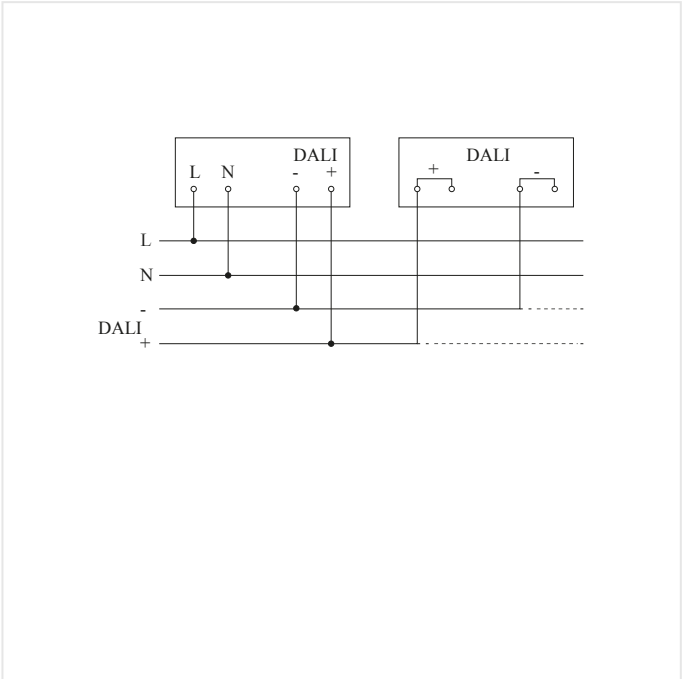

Circuit diagram for interconnecting DALI-2 APC with DALI-2 IPD

IS 3360 DALI-2 APC - concealed, sq.

PRESENCE DETECTOR

EAN 4007841033514

E-Nr. 535945066

Highlights



UV-resistant plastic



Optional remote controls

IS 3360 DALI-2 APC - concealed, sq.
PRESENCE DETECTOR

EAN 4007841033514
E-Nr. 535945066

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841009151	Smart Remote	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory
 4007841592806	Nutzer Fernbedienung RC5	Accessory
 4007841056728	Schwarze Blende für IR-Sensoren Unterputz eckig	Accessory
 4007841056742	Schwarze Blende für IR-Sensoren Unterputz rund	Accessory

ORDERING INFORMATION

Art.-Nr.

033514

EAN

4007841033514

E-Number

535945066

Typ

IS 3360 DALI-2 APC - concealed, sq.

nevalux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss