

True Presence COM2 - concealed white

neva
lux**PRESENCE DETECTOR**

EAN 4007841057947

E-Nr. 535936102

 **steinel**

50 x 103 x 103 mm



True Presence COM2 - concealed white

PRESENCE DETECTOR

EAN 4007841057947

E-Nr. 535936102

Technical Data

IDENTIFICATION	
Version	Presence detector
DIMENSIONS	
Dimensions L x W x H	50 x 103 x 103 mm
ELECTRICAL	
Mains connection	220 – 240 V / 50 – 60 Hz
Power	2000 W
Switching output 1 resistive	2000 W
Fluorescent lamps ECG	1500 W
Fluorescent lamps uncompensated	1000 VA
Fluorescent lamps series-compensated	400 VA
Fluorescent lamps parallel-compensated	1000 VA
Switching output 1 low-voltage halogen lamps	2000 VA
LED lamps < 2 W	100 W
LED lamps > 2 W < 8 W	300 W
LED lamps > 8 W	600 W
Capacitive load in µF	176 µF
Own consumption	1 W
Switching output 1 number of LED/fluorescent lamps	8 pcs.
Switching output 1 potential-free	No
Switching output 2 resistive	230 W
Switching output 2 potential-free	Yes
SENSOR TECHNOLOGY	
Max. mounting height	12,00 m

Sensor technology	High frequency
Transmission power	< 1 mW
HF technology	7,2 GHz
With motion detector	Yes
Detection	also through glass, wood and stud walls
Detection angle	360 °
Opening angle	160 °
Sneak-under protection	Yes
Segment-by-segment masking	No
Electronic scalability	Yes
Mechanical scalability	No
Radial range	Ø 15 m (177 m²)
Tangential range	Ø 15 m (177 m²)
Mounting height	2,00 – 12,00 m
Presence range	Ø 15 m (177 m²)
True Presence range	Ø 9 m (64 m²)
Optimal mounting height	2,8 m
CONNECTIVITY	
Networking	Yes
Type of networking	Master/master Master/slave
Networking via	Bluetooth
LIGHTING TECHNOLOGY	
Soft light start	No
Continuous light	selectable
Constant light regulation	No
SETTINGS	
Twilight switch	Yes
Twilight setting	2 – 2000 lx

Time setting	20 s – 60 Min.
Base light function	No
Main light adjustable	No
Functions	Group parameterisation Semi-/fully automatic Lighting scenario Manual ON / ON-OFF Neighbouring group function Normal / test mode
Settings via	Bluetooth
With remote control	No
Twilight setting teach	Yes
HOUSING & MATERIAL	
Protection class (IP)	IP20
Ambient temperature	from -20 up to 50 °C
Mounting location	ceiling
Application location	Indoors
Mounting type	Concealed wiring
Material	Plastic
Application room	Indoors WC / washroom care room changing room classroom conference room / meeting room dining hall / staff restaurant duty room high-bay warehouse hotel room kitchenette lecture hall one-person office open-plan office production facilities reception / lobby recreation room sports hall warehouse
Colour	white
RAL colour	9003
SCOPE OF DELIVERY & WARRANTY	
Manufacturer warranty	5 years
Corner wall bracket included	No


True Presence COM2 - concealed white

PRESENCE DETECTOR

EAN 4007841057947
E-Nr. 535936102

Illustrations

TECHNICAL DRAWINGS

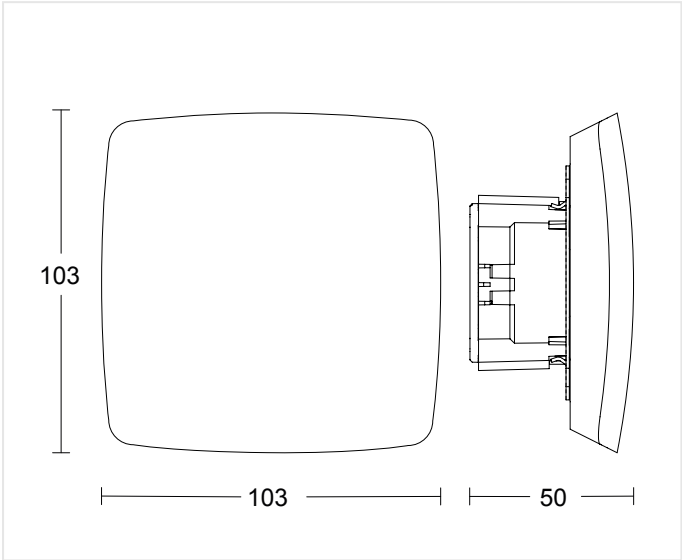

50 x 103 x 103 mm

MOUNTING HEIGHT

2,00 – 12,00 m BEREICH	2,8 m OPTIMAL	12,00 m MAX
---------------------------	------------------	----------------

True Presence COM2 - concealed white


PRESENCE DETECTOR

EAN 4007841057947

E-Nr. 535936102

Wiring Diagrams

WIRING DIAGRAM 1

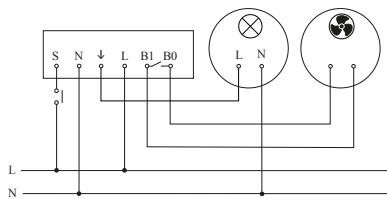

Master circuit diagram

True Presence COM2 - concealed white

PRESENCE DETECTOR


EAN 4007841057947

E-Nr. 535936102


Highlights



UV-resistant plastic

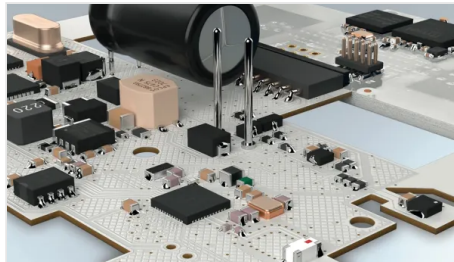

Digital high frequency sensor

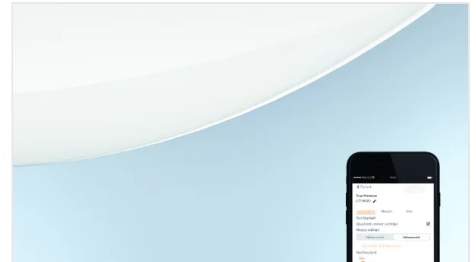

Interconnectable and adjustable via
Bluetooth

True Presence COM2 - concealed white

PRESENCE DETECTOR

EAN 4007841057947

E-Nr. 535936102

Accessories

ORDERING INFORMATION	
Art.-Nr.	057947
EAN	4007841057947
E-Number	535936102
Typ	True Presence COM2 - concealed white

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss