

L 30 S with motion detector

E27 SENSOR-SWITCHED OUTDOOR LIGHT

neva
lux

EAN 4007841068899

- Outdoor light with motion detector and pleasant ambient light on the house wall
- High-quality aluminium screen as well as UV-resistant material for a long service life
- Automatic light thanks to 180 ° Infrared sensor with up to 10 m detection of movement
- Detection area and range can be individually limited using the cover stickers supplied and the swivelling sensor (90° vertical)
- With E27 socket for energy-saving lamps or LED bulbs with max. 15 W (not included in delivery)
- Incl. mounting accessories - plastic-free packaging

● steinel

108 x 122 x 261 mm



L 30 S with motion detector

EAN 4007841068899

E27 SENSOR-SWITCHED OUTDOOR LIGHT

Technical Data

DIMENSIONS		CONNECTIVITY		Ambient temperature		from -20 up to 40 °C
Dimensions L x W x H		108 x 122 x 261 mm	Networking	No	Housing material	Plastic
ELECTRICAL			LIGHTING TECHNOLOGY		Cover material	Plastic, opal
Mains connection		220 – 240 V / 50 – 60 Hz	With illuminant	No	Cover material (scope of delivery)	sticker
Power		15 W	Base	E27	Mounting location	wall
SENSOR TECHNOLOGY			Soft light start	No	Application location	Outdoors
Max. mounting height		3,00 m	SETTINGS		Mounting type	Surface wiring
Sensor technology		passive infrared	Twilight switch	Yes	Application room	all round the building courtyard & driveway front door garden terrace / balcony
With motion detector		Yes	Twilight setting	2 – 2000 lx	Colour	Anthracite
Detection angle		180 °	Time setting	8 s – 35 Min.	SCOPE OF DELIVERY & WARRANTY	
Sneak-under protection		No	Base light function	No	Manufacturer warranty	3 years
Segment-by-segment masking		No	Main light adjustable	No	House number sheet included	No
Electronic scalability		No	Settings via	Potentiometers	CERTIFICATES & EPREL	
Mechanical scalability		No	With remote control	No	Certificates	DEKRA
Radial range		r = 3 m (14 m²)	Twilight setting teach	No	EPREL category	Surrounded product with separate light source (e.g. E27)
Tangential range		r = 10 m (157 m²)	HOUSING & MATERIAL			
Mounting height		1,80 – 3 m	Impact resistance	IK07		
Optimal mounting height		2 m	Protection class (IP)	IP44		
			Protection class	II		


L 30 S with motion detector

EAN 4007841068899

E27 SENSOR-SWITCHED OUTDOOR LIGHT

Illustrations

TECHNICAL DRAWINGS

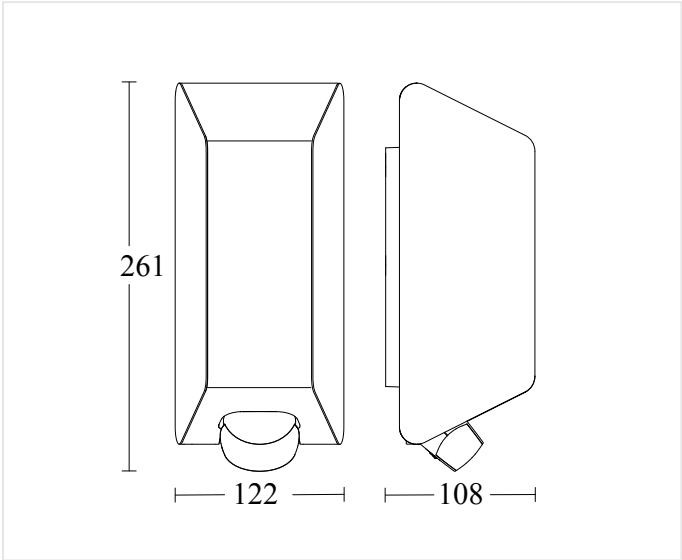

108 x 122 x 261 mm

MOUNTING HEIGHT

1,80 – 3 m BEREICH	2 m OPTIMAL	3,00 m MAX
-----------------------	----------------	---------------


L 30 S with motion detector

E27 SENSOR-SWITCHED OUTDOOR LIGHT

EAN 4007841068899

Wiring Diagrams

WIRING DIAGRAM 1

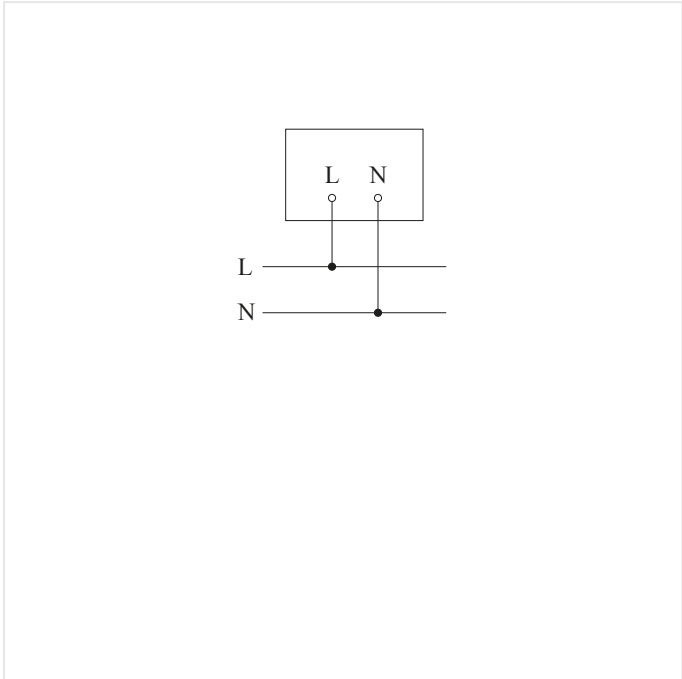


Circuit diagram

L 30 S with motion detector

EAN 4007841068899

E27 SENSOR-SWITCHED OUTDOOR LIGHT

Highlights

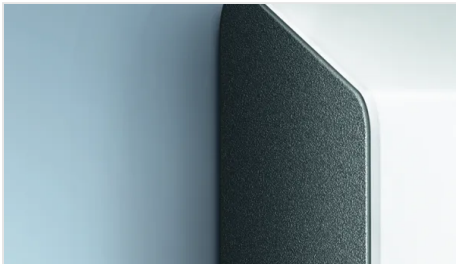

High-quality aluminium trim panel



UV-resistant plastic

L 30 S with motion detector

E27 SENSOR-SWITCHED OUTDOOR LIGHT

EAN 4007841068899

Accessories

ORDERING INFORMATION	
Art.-Nr.	068899
EAN	4007841068899
Typ	L 30 S with motion detector
nevalux nevalux AG Neugrütstrasse 2 8610 Uster +41 44 508 78 78 info@nevalux.swiss	