

XLED home 2 S Anthracite

SENSOR-SWITCHED LED FLOODLIGHT

neva
lux

EAN 4007841033064

E-Nr. 924700187

- Spotlight with motion detector and fully swivelling LED panel in noble opal look
- Never change bulbs again thanks to 50,000 hours LED life (approx. 30 years at 4.5 hours/day)
- Automatic light thanks to 180 ° Infrared sensor with up to 10 m detection of movement
- Optional corner wall bracket available for reliable and uninterrupted monitoring of an area in front of two house walls
- Warm white light (3000 K) and long-life 13,7 W LEDs with 1550 lm, with an illumination of max. 150 sqm, max. 4m mounting height
- Incl. mounting accessories - plastic-free packaging

 **steinel**

161 x 180 x 218 mm



XLED home 2 S Anthracite

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841033064
E-Nr. 924700187

Technical Data

DIMENSIONS		LIGHTING TECHNOLOGY		Twilight setting teach		No
Dimensions L x W x H		Measured luminous flux 360°		HOUSING & MATERIAL		
161 x 180 x 218 mm		1550 lm		Impact resistance		IK03
ELECTRICAL		Colour temperature		Protection class (IP)		IP44
Mains connection		3000 K		Protection class		II
Power		SDCM3		Ambient temperature		from -20 up to 40 °C
13,7 W		Colour rendering index		Housing material		HCMC
SENSOR TECHNOLOGY		With illuminant		Cover material		Plastic, opal
Max. mounting height		Yes, STEINEL LED system		Mounting location		corner wall
Sensor technology		LED cannot be replaced		Application location		Outdoors
With motion detector		Base		Mounting type		Surface wiring
Detection angle		LED cooling system		Application room		all round the building courtyard & driveway outdoors terrace / balcony
Opening angle		HCMC (High Conductive Magnesium Composite)		Colour		Anthracite
Sneak-under protection		Soft light start		SCOPE OF DELIVERY & WARRANTY		
Yes		LIFETIME		Manufacturer warranty		5 years
Segment-by-segment masking		LED lifetime max. °C		Corner wall bracket included		No
Yes		50000 h		CERTIFICATES & EPREL		
Electronic scalability		LED lifetime L70B50 25°C		EPREL energy efficiency class		E
No		> 60000 h		EPREL category		Light source
Mechanical scalability		Luminous flux decline per LM80				
No		L70B10				
Radial range		SETTINGS				
r = 5 m (39 m²)		Twilight switch				
Tangential range		Yes				
r = 10 m (157 m²)		Twilight setting				
Mounting height		2 – 2000 lx				
Optimal mounting height		Time setting				
2 m		8 s – 35 Min.				
CONNECTIVITY		Base light function				
Networking		No				
No		Main light adjustable				
		No				
		Settings via				
		Potentiometers				


XLED home 2 S Anthracite

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841033064
E-Nr. 924700187

Illustrations

TECHNICAL DRAWINGS

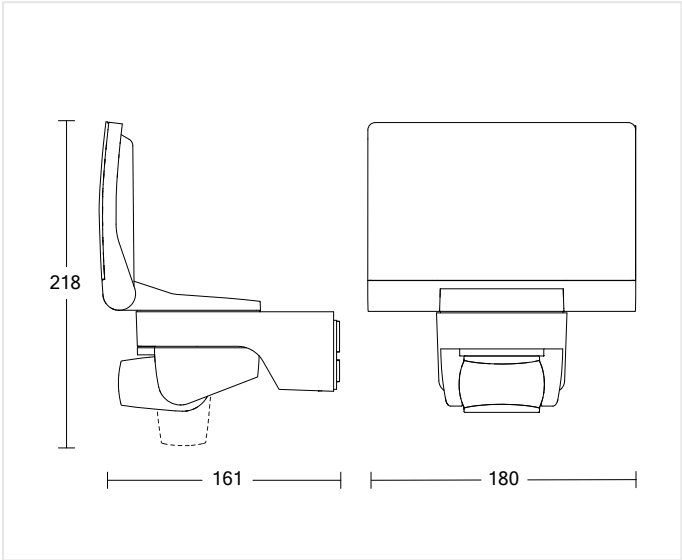

161 x 180 x 218 mm

MOUNTING HEIGHT

1,80 – 4,00 m BEREICH	2 m OPTIMAL	4,00 m MAX
--------------------------	----------------	---------------


XLED home 2 S Anthracite

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841033064
E-Nr. 924700187

Wiring Diagrams

WIRING DIAGRAM 1

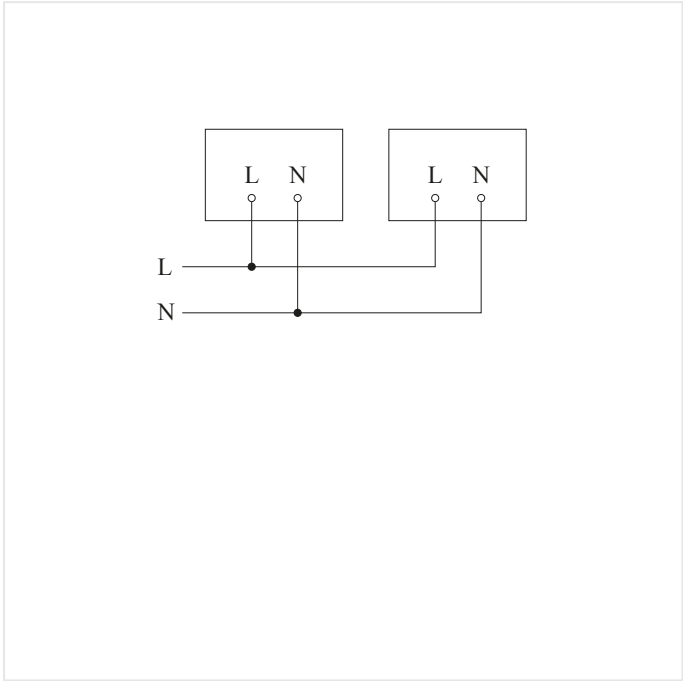

Circuit diagram

XLED home 2 S Anthracite

SENSOR-SWITCHED LED FLOODLIGHT


EAN 4007841033064

E-Nr. 924700187

Highlights



HCMC cooling system

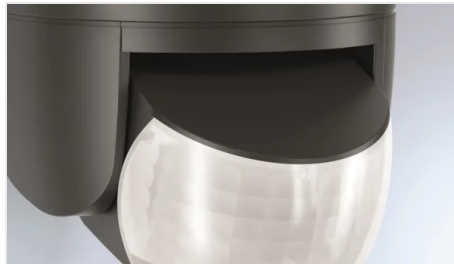

UV-resistant plastic



Colour rendering index Ra $\geq$ 80

XLED home 2 S Anthracite

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841033064
E-Nr. 924700187

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841053086	Eckwandhalter XLED Home 2/ Protect/ Pro 240/ PRO Expanse graphit	Accessory
 4007841055615	Eckwandhalter XLED Home 2/ Protect/ Pro 240/ PRO Expanse weiss	Accessory
 4007841055875	Eckwandhalter XLED Home 2/ Protect/ Pro 240 schwarz	Accessory
 4007841053109	Eckwandhalter XLED Home 2/ Protect/ Pro 240/ PRO Expanse silber	Accessory

ORDERING INFORMATION

Art.-Nr.

033064

EAN

4007841033064

E-Number

924700187

Typ

XLED home 2 S Anthracite

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss