L 260 S

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN 4007841007874
E-Nr. 924354079

- Outdoor light with motion detector with high-quality stainless steel base and opal glass
- Perfect complement to the GL 60 S floor and path luminaire
- Automatic light thanks to 240 ° Infrared sensor with up to 12 m detection of movement
- Functions: pleasant soft light start, 4 hours continuous light
- Incl. E27 LED bulb with warm white light (3000 K) with 703 lm at 9,87 W
- Incl. mounting accessories - plastic-free packaging

steinel

177 x 102 x 426 mm



L 260 S

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN **4007841007874**
E-Nr. **924354079**

Technical Data

DIMENSIONS

Dimensions L × W × H	**177 x 102 x 426 mm**

ELECTRICAL

Mains connection	**230 – 240 V / 50 Hz**
Power	**9,87 W**

SENSOR TECHNOLOGY

Max. mounting height	**6,00 m**
Sensor technology	**passive infrared**
With motion detector	**Yes**
Detection angle	**240 °**
Opening angle	**180 °**
Sneak-under protection	**Yes**
Segment-by-segment masking	**Yes**
Electronic scalability	**No**
Mechanical scalability	**No**
Radial range	**r = 6 m (75 m²)**
Tangential range	**r = 12 m (302 m²)**
Mounting height	**1,80 – 6,00 m**
Optimal mounting height	**2 m**

CONNECTIVITY

Networking	**No**
Slave mode adjustable	**No**
Control technology	**On/Off-Leuchte**

LIGHTING TECHNOLOGY

Measured luminous flux 360°	**703 lm**
Efficiency	**71,2 lm/W**
Colour temperature	**3000 K**
LED colour deviation	**SDCM3**
Colour rendering index	**80-89**
With illuminant	**Yes, LED lamp**
Illuminant	**LED can be replaced**
Base	**E27**
LED cooling system	**Passive Thermo Control**
Soft light start	**Yes**
Continuous light	**selectable, 4h**

LIFETIME

LED lifetime max. °C	**25000 h**

SETTINGS

Twilight switch	**Yes**
Twilight setting	**2 – 2000 lx**
Time setting	**5 s – 15 Min.**
Base light function	**No**
Settings via	**Potentiometers**
With remote control	**No**

HOUSING & MATERIAL

Impact resistance	**IK03**
Protection class (IP)	**IP44**
Protection class	**I**
Ambient temperature	**from -20 up to 50 °C**
Housing material	**Stainless steel**
Cover material	**Glass opal**
Cover material (scope of delivery)	**shrouds**
Mounting location	**wall**
Application location	**Outdoors**
Mounting type	**Surface wiring**
Application room	**all round the building courtyard & driveway front door outdoors terrace / balcony**
Colour	**Silver**

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	**3 years**

CERTIFICATES & EPREL

EPREL category	**Surrounded product with separate light source (e.g. E27)**


L 260 S

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN **4007841007874**
E-Nr. **924354079**

Illustrations

TECHNICAL DRAWINGS

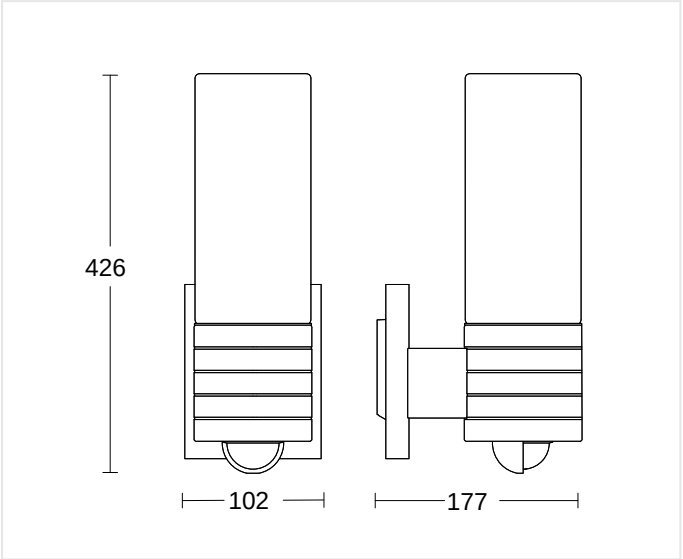

177 x 102 x 426 mm

MOUNTING HEIGHT

1,80 – 6,00 m	2 m	6,00 m
BEREICH	OPTIMAL	MAX


L 260 S

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN **4007841007874**
E-Nr. **924354079**

Wiring Diagrams

WIRING DIAGRAM 1



Circuit diagram

L 260 S

SENSOR-SWITCHED LED OUTDOOR LIGHT


EAN **4007841007874**
E-Nr. **924354079**

Highlights

Intelligent soft light start




High-quality stainless steel

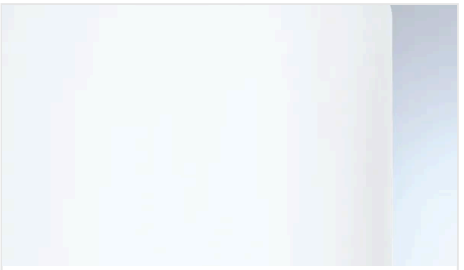

High-quality opal glass shade



Including innovative LED lamp

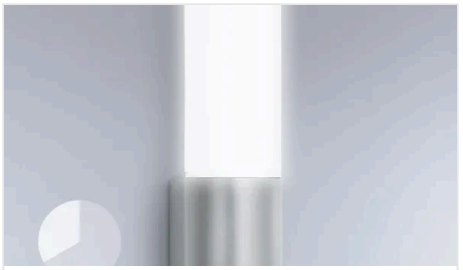

4-hour manual override (optional)

L 260 S

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN **4007841007874**
E-Nr. **924354079**

Accessories

	ARTICLE NUMBER	DESCRIPTION	CATEGORY
	4007841008314	**LED Leuchtstab L 260 S**	Accessory
	4007841001353	**Ersatzglas für L 260 S**	Spare Part

ORDERING INFORMATION

Art.-Nr.	007874
EAN	4007841007874
E-Number	924354079
Typ	**L 260 S**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss