IR Quattro HD-2 24m KNX - in-ceiling installation, white

PRESENCE DETECTOR

EAN 4007841079413
E-Nr. 535900060

- Passive infrared presence detector with square 360° detection
- 5.200 switching zones for the finest detection
- Offers the largest detection range in our IR range
- 4 pyro sensors individually de- / activatable
- Sensitivity digitally adjustable
- Measures presence and brightness
- Temperature and humidity measurement with IP, KNX and DALI-2 IPD
- Setting and networking via Bluetooth
- Ideal for open-plan offices and classrooms

steinel

106 x 103 x 103 mm



IR Quattro HD-2 24m KNX - in-ceiling installation, white

PRESENCE DETECTOR

EAN 4007841079413
E-Nr. 535900060

Technical Data

IDENTIFICATION

Version	Presence detector

DIMENSIONS

Dimensions L × W × H	106 x 103 x 103 mm

ELECTRICAL

Mains connection	30 V
Own consumption	0,3 W
Supply voltage detail	KNX bus

SENSOR TECHNOLOGY

Max. mounting height	10,00 m
Sensor technology	passive infrared
Detection angle	360 °
Opening angle	160 °
Sneak-under protection	Yes
Segment-by-segment masking	Yes
Electronic scalability	Yes
Mechanical scalability	Yes
Radial range	9 x 9 m (81 m²)
Tangential range	24 x 24 m (576 m²)
Mounting height	2,50 – 10,00 m
Presence range	9 x 9 m (81 m²)
Optimal mounting height	2,8 m

CONNECTIVITY

Networking	Yes
KNX functions	Comfort Photo-cell controller Individual pyro evaluation Basic light level function Light level HVAC output Constant-lighting control Light output 4x Humidity output Presence output Day / night function Dewpoint Temperature output Logic gate
With bus coupler	Yes
Control technology	Steinel Connect
Wireless networking via	BT SIG Mesh
Networking via	KNX

LIGHTING TECHNOLOGY

Soft light start	Yes
Continuous light	selectable
Constant light regulation	Yes

SETTINGS

Twilight switch	Yes
Twilight setting	2 – 2000 lx
Time setting	10 s – 1092 Min.
Base light function	Yes
Main light adjustable	0 - 100 %
Settings via	Bus ETS software App Potentiometers Bluetooth Mesh
With remote control	No
Twilight setting teach	Yes

HOUSING & MATERIAL

Protection class (IP)	IP20
Ambient temperature	from 0 up to 40 °C
Mounting location	ceiling
Application location	Indoors
Mounting type	In-ceiling installation
Material	Plastic
Application room	Indoors changing room classroom conference room / meeting room dining hall / staff restaurant duty room high-bay warehouse lecture hall multi-storey / underground car park open-plan office production facilities reception / lobby recreation room sports hall
Colour	white
RAL colour	9003

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	5 years
Corner wall bracket included	No


IR Quattro HD-2 24m KNX - in-ceiling installation, white

PRESENCE DETECTOR

EAN **4007841079413**
E-Nr. **535900060**

Illustrations

TECHNICAL DRAWINGS

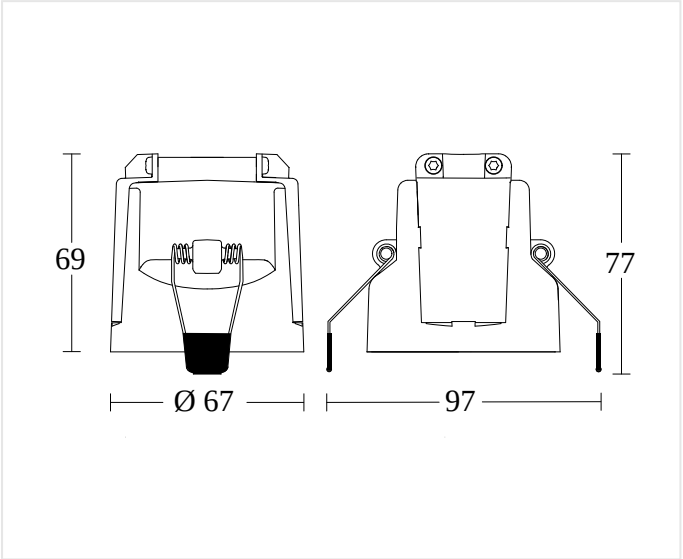

106 x 103 x 103 mm

MOUNTING HEIGHT

2,50 – 10,00 m	2,8 m	10,00 m
BEREICH	OPTIMAL	MAX

IR Quattro HD-2 24m KNX - in-ceiling installation, white

PRESENCE DETECTOR

EAN 4007841079413
E-Nr. 535900060

Highlights



UV-resistant plastic

IR Quattro HD-2 24m KNX - in-ceiling installation, white

PRESENCE DETECTOR

EAN 4007841079413
E-Nr. 535900060

Accessories

	ARTICLE NUMBER	DESCRIPTION	CATEGORY
	4007841067335	**Relais REL5A-Bluetooth**	System components
	4007841067342	**Tasterkoppler PC4-Bluetooth**	System components

ORDERING INFORMATION

Art.-Nr.	079413
EAN	4007841079413
E-Number	535900060
Typ	**IR Quattro HD-2 24m KNX - in-ceiling installation, white**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss