

HF 360-2 COM2 - Surface wiring

PRESENCE DETECTOR

neva
lux

EAN 4007841086787

E-Nr. 535903078

- Perfect radial detection with a range of up to 25 m, ideal for long corridors and hallways
- Customisable range that can be set individually in both directions
- Control PRO II design for a modern and functional look that enables versatile applications
- Bluetooth technology for simple connection and control via Bluetooth
- Multiple interfaces, compatible with COM1, COM2, DALI-2 APC, DALI-2 IPD, KNX, IP and BT IPD
- External light measurement required for black sensors that can be integrated via Bluetooth or KNX

 **steinel**

57 x 123 x 123 mm



HF 360-2 COM2 - Surface wiring

PRESENCE DETECTOR

EAN 4007841086787

E-Nr. 535903078

Technical Data

IDENTIFICATION		Detection		also through glass, wood and stud walls	Base light function	No
Version	Presence detector	Detection angle		360 °	Main light adjustable	No
DIMENSIONS		Opening angle		160 °	Functions	Group parameterisation
Dimensions L x W x H		Sneak-under protection		Yes		Semi-/fully automatic
ELECTRICAL		Segment-by-segment masking		No		Master/slave override
Mains connection		Electronic scalability		Yes		Neighbouring group function
Power		Mechanical scalability		No	Normal / test mode Presence function Manual ON / ON-OFF	
Switching output 1 resistive		Radial range		Ø 12 m (113 m²)	Settings via	Bluetooth Mesh
Switching output 1 low-voltage halogen lamps		Tangential range		Ø 12 m (113 m²)	With remote control	No
Own consumption		Mounting height		2,5 – 4 m	Twilight setting teach	Yes
Switching output 1 number of LED/fluorescent lamps		Optimal mounting height		2,8 m	HOUSING & MATERIAL	
Switching output 1 potential-free		CONNECTIVITY			Protection class (IP)	IP54
Switching output 2 resistive		Networking		Yes	Ambient temperature	from -25 up to 50 °C
Switching output 2 potential-free		Networking via		Bluetooth Mesh	Mounting location	ceiling
SENSOR TECHNOLOGY		LIGHTING TECHNOLOGY			Application location	Indoors
Max. mounting height		Soft light start		No	Mounting type	Surface wiring
Sensor technology		Continuous light		selectable	Material	Plastic
Transmission power		Constant light regulation		No	Application room	Indoors WC / washroom function room / ancillary room kitchenette stairwell
HF technology		SETTINGS			Colour	white
With motion detector		Twilight switch		Yes	RAL colour	9003
		Twilight setting		2 – 2000 lx	SCOPE OF DELIVERY & WARRANTY	
		Time setting		10 s – 60 Min.	Manufacturer warranty	5 years
					Corner wall bracket included	No


HF 360-2 COM2 - Surface wiring

PRESENCE DETECTOR

EAN 4007841086787
E-Nr. 535903078

Illustrations

TECHNICAL DRAWINGS

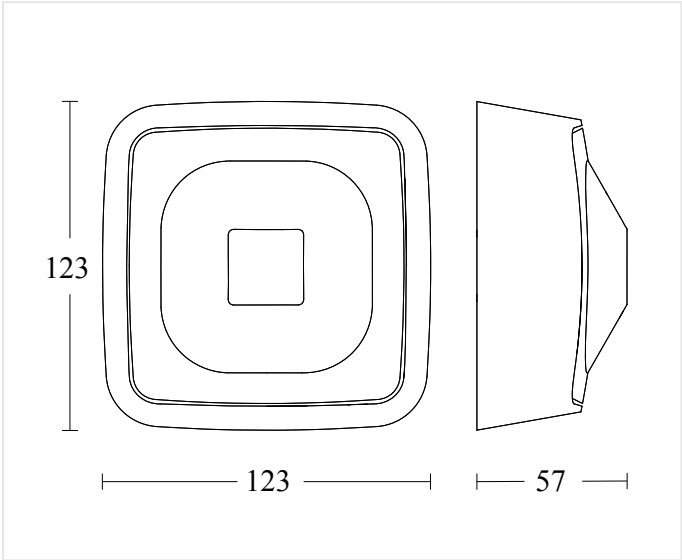

57 x 123 x 123 mm

MOUNTING HEIGHT

2,5 – 4 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
----------------------	------------------	---------------

HF 360-2 COM2 - Surface wiring


PRESENCE DETECTOR

EAN 4007841086787

E-Nr. 535903078

Wiring Diagrams

WIRING DIAGRAM 1

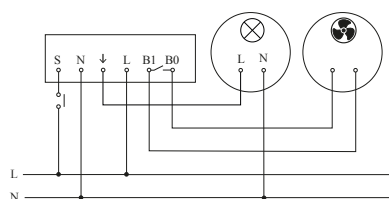

HF 360-2 COM2 - Surface wiring

PRESENCE DETECTOR

EAN 4007841086787

E-Nr. 535903078

Highlights



UV-resistant plastic

HF 360-2 COM2 - Surface wiring

PRESENCE DETECTOR

EAN 4007841086787

E-Nr. 535903078

Accessories

ORDERING INFORMATION	
Art.-Nr.	086787
EAN	4007841086787
E-Number	535903078
Typ	HF 360-2 COM2 - Surface wiring

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss