

IR Quattro SLIM XS 4m KNX - square black

neva
lux**PRESENCE DETECTOR**

EAN 4007841082260

E-Nr. 535918137

 **steinel**

49 x 80 x 80 mm



IR Quattro SLIM XS 4m KNX - square black

PRESENCE DETECTOR

EAN 4007841082260
E-Nr. 535918137

Technical Data

IDENTIFICATION		Optimal mounting height		2,8 m	Settings via		ETS software Remote control
Version	Presence detector	CONNECTIVITY			Bus Smart Remote		
DIMENSIONS		Networking		Yes	With remote control		No
Dimensions L x W x H	49 x 80 x 80 mm	Type of networking		Master/master Master/slave	Twilight setting teach		Yes
ELECTRICAL		Networking via		KNX bus	Base light function in percent		10 – 50 %
Supply voltage detail	KNX bus	KNX functions		Photo-cell controller Basic light level function Light level HVAC output Constant-lighting control Light output 4x Presence output Day / night function Logic gate	Base light function percent from		10 %
SENSOR TECHNOLOGY		With bus coupler		Yes	HOUSING & MATERIAL		
Max. mounting height	4,00 m	LIGHTING TECHNOLOGY			Protection class (IP)		IP20
Sensor technology	passive infrared	Soft light start		Yes	Ambient temperature		from 0 up to 40 °C
Detection angle	360 °	Continuous light		selectable	Mounting location		ceiling
Opening angle	71 °	Constant light regulation		Yes	Application location		Indoors
Sneak-under protection	Yes	SETTINGS			Mounting type		Concealed wiring
Segment-by-segment masking	No	Twilight switch		Yes	Material		Plastic
Electronic scalability	No	Twilight setting		10 – 1000 lx	Application room		Indoors WC / washroom care room function room / ancillary room hotel room one-person office
Mechanical scalability	No	Time setting		60 s – 255 Min.	Colour		black
Range detail	Retina lens and hexagonal Fresnel structure	Base light function		Yes	RAL colour		9005
Radial range	4 x 4 m (16 m²)	Base light function time		Permanently ON 1-255 min all night	SCOPE OF DELIVERY & WARRANTY		
Tangential range	4 x 4 m (16 m²)	Main light adjustable		0 - 100 %	Manufacturer warranty		5 years
Switching zones	408 switching zones				Corner wall bracket included		No
Mounting height	2,50 – 4,00 m						
Presence range	4 x 4 m (16 m²)						


IR Quattro SLIM XS 4m KNX - square black

PRESENCE DETECTOR

EAN 4007841082260
E-Nr. 535918137

Illustrations

TECHNICAL DRAWINGS

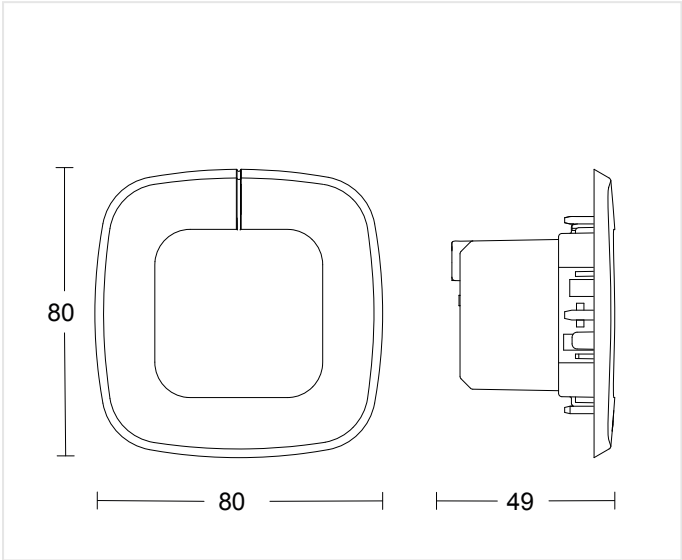

49 x 80 x 80 mm

MOUNTING HEIGHT

2,50 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------------	------------------	---------------


IR Quattro SLIM XS 4m KNX - square black

PRESENCE DETECTOR

EAN 4007841082260

E-Nr. 535918137

Highlights

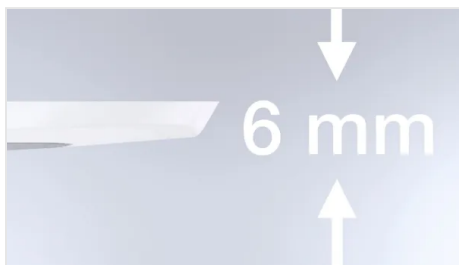

Extremely slim overall height



High-quality retina lens



Can only be set using optional remote controls

IR Quattro SLIM XS 4m KNX - square black

PRESENCE DETECTOR

EAN 4007841082260

E-Nr. 535918137

Accessories

ORDERING INFORMATION	
Art.-Nr.	082260
EAN	4007841082260
E-Number	535918137
Typ	IR Quattro SLIM XS 4m KNX - square black

nevalux nevalux AG Neugrütstrasse 2 8610 Uster +41 44 508 78 78 info@nevalux.swiss	
--	--