

RS PRO S30 SC Multipack (5 pcs.) Multipack

neva
lux**SENSOR-SWITCHED LED INDOOR LIGHT**

EAN 4007841079727

E-Nr. 941349379

 **steinel**

350 x 83 mm



RS PRO S30 SC Multipack (5 pcs.) Multipack

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841079727

E-Nr. 941349379

Technical Data

DIMENSIONS

Dimensions Ø x H

350 x 83 mm

ELECTRICAL

Mains connection

220 – 240 V / 50 – 60 Hz

Power

25,7 W

Own consumption

0,39 W

SENSOR TECHNOLOGY

Max. mounting height

4,00 m

Sensor technology

High frequency

Transmission power

< 1 mW

HF technology

5,8 GHz

With motion detector

Yes

Detection

also through glass, wood and stud walls

Detection angle

360 °

Opening angle

160 °

Segment-by-segment masking

Yes

Electronic scalability

Yes

Mechanical scalability

No

Radial range

Ø 10 m (79 m²)

Tangential range

Ø 10 m (79 m²)

Mounting height

2 – 4 m

Optimal mounting height

2,8 m

CONNECTIVITY

Networking

Yes

Type of networking

Master/master

Networking via

Bluetooth Mesh

Slave mode adjustable

Yes

LIGHTING TECHNOLOGY

Measured luminous flux 360°

2615 lm

Colour temperature

3000 K

LED colour deviation

SDCM3

With illuminant

Yes, STEINEL LED system

Illuminant

LED cannot be replaced

Base

without

LED cooling system

Passive Thermo Control

Soft light start

Yes

Continuous light

selectable

LIFETIME

LED lifetime max. °C

55000 h

Luminous flux decline per LM80

L80B50

SETTINGS

Twilight switch

Yes

Twilight setting

2 – 2000 lx

Time setting

5 s – 60 Min.

Base light function

Yes

Base light function detail

LED effect light

Base light function time

1-60 min

Main light adjustable

Yes

Functions

Neighbouring group function
Presence function Group
parameterisation Manual ON / ON-OFF Connection to central battery systems
Motions sensor DIM function
Adjustable fade time when switching on and off Free selection of the light value in a luminaire group Normal / test mode Orientation light
Presence detector logic
Encrypted communication

Settings via

Bluetooth Mesh Smartphone

With remote control

No

Twilight setting teach

Yes

Base light function in percent

7 – 100 %

Base light function percent from

7 %

HOUSING & MATERIAL

Impact resistance

IK07

Protection class (IP)

IP20

Protection class

II

Ambient temperature

from -20 up to 40 °C

Housing material

Aluminium

Mounting location

ceiling wall

Application location

Indoors

Mounting type

Surface wiring

Material

Aluminium

Application room

Indoors WC / washroom
changing room corridor / aisle function room / ancillary room kitchenette
outdoors stairwell

Colour

Silver

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty

5 years

House number sheet included

No

RS PRO S30 SC Multipack (5 pcs.) Multipack


SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841079727

E-Nr. 941349379

Illustrations

TECHNICAL DRAWINGS

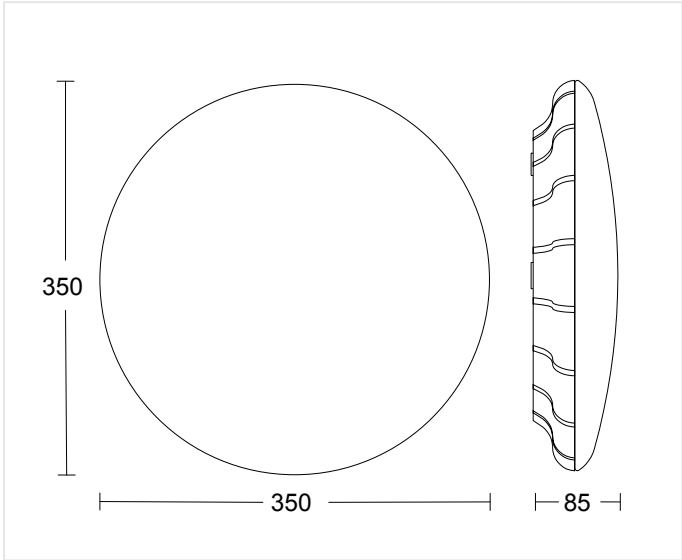

350 x 83 mm

MOUNTING HEIGHT

2 – 4 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------	------------------	---------------

RS PRO S30 SC Multipack (5 pcs.) Multipack


SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841079727

E-Nr. 941349379


Wiring Diagrams

WIRING DIAGRAM 1

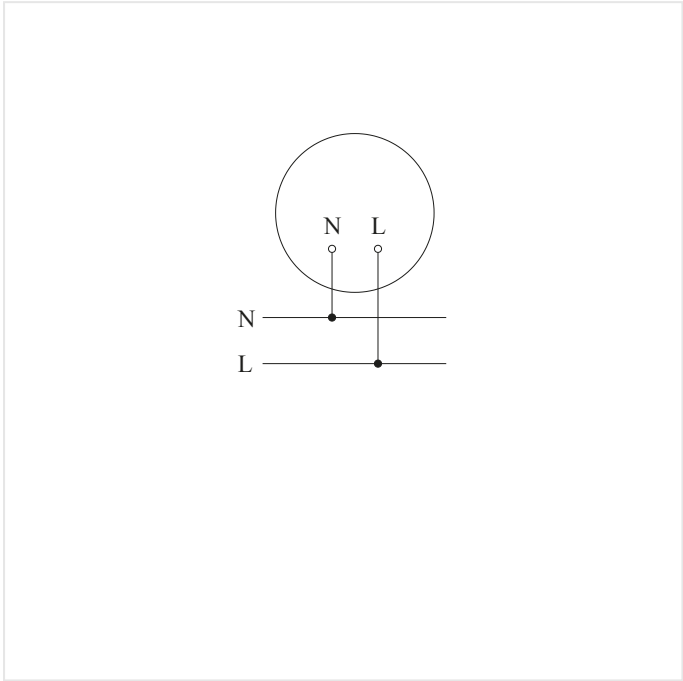

Slave/wireless master interconnection circuit diagram

WIRING DIAGRAM 2

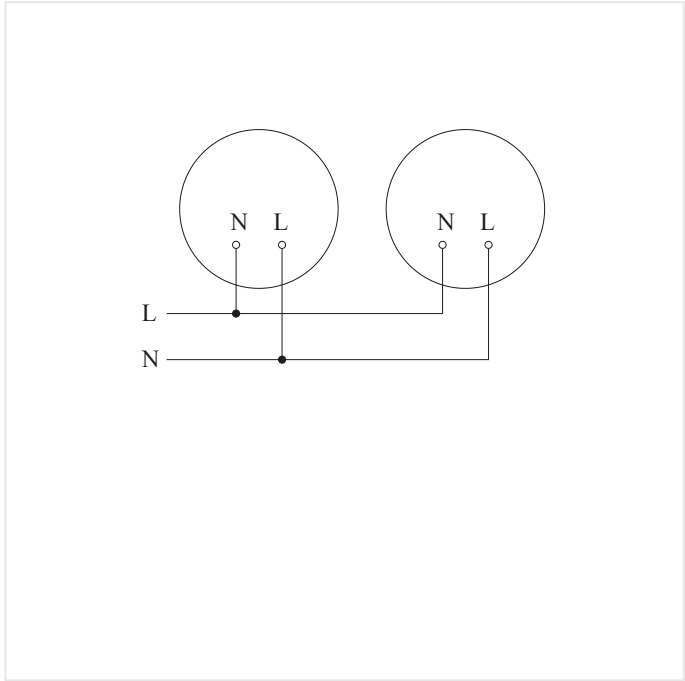

Master/master interconnection circuit diagram


RS PRO S30 SC Multipack (5 pcs.) Multipack

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841079727

E-Nr. 941349379

Highlights

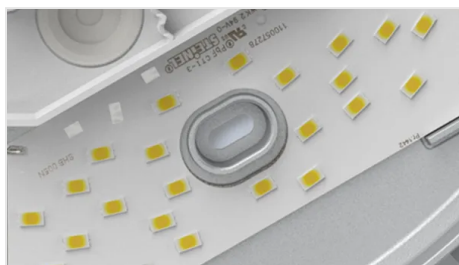

Including STEINEL LED system



Intelligent LED cooling system




Optional basic lighting level 10 %



Optional basic lighting level 10 - 20%



Wireless interconnection

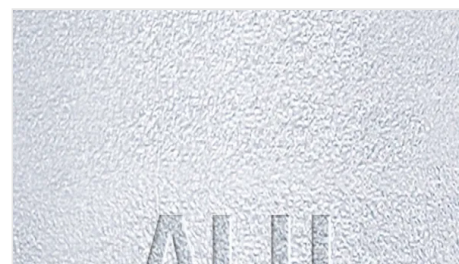

High-quality aluminium

RS PRO S30 SC Multipack (5 pcs.) Multipack

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841079727

E-Nr. 941349379

Accessories

ORDERING INFORMATION	
Art.-Nr.	079727
EAN	4007841079727
E-Number	941349379
Typ	RS PRO S30 SC Multipack (5 pcs.) Multipack

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss