

IR Quattro HD-2 24m DALI-2 Input Device - surface

neva
lux

PRESENCE DETECTOR

EAN 4007841064389

E-Nr. 535900047

- Passive infrared presence detector with square 360° detection
- 5.200 switching zones for the finest detection
- Offers the largest detection range in our IR range
- 4 pyro sensors individually de-/activatable
- Sensitivity digitally adjustable
- Measures presence and brightness
- Temperature and humidity measurement with IP, KNX and DALI-2 IPD
- Setting and networking via Bluetooth
- Ideal for open-plan offices and classrooms

 **steinel**

64 x 123 x 123 mm




IR Quattro HD-2 24m DALI-2 Input Device - surface

PRESENCE DETECTOR

EAN 4007841064389
E-Nr. 535900047

Illustrations

TECHNICAL DRAWINGS

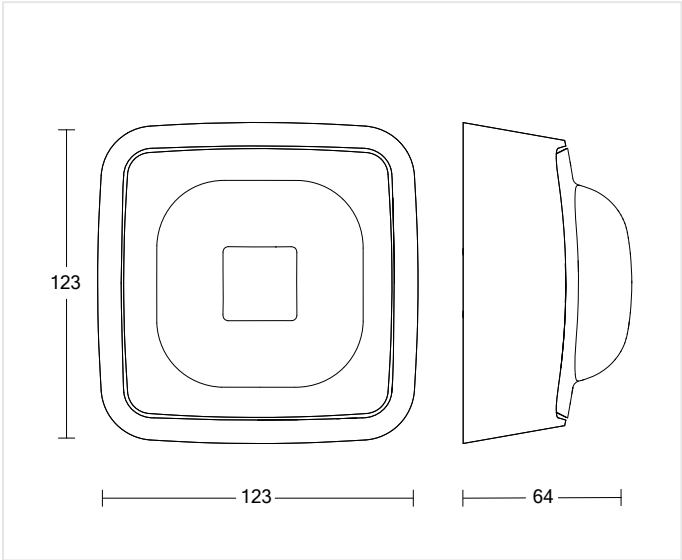

64 x 123 x 123 mm

MOUNTING HEIGHT

2,50 – 10,00 m BEREICH	2,8 m OPTIMAL	10,00 m MAX
---------------------------	------------------	----------------

IR Quattro HD-2 24m DALI-2 Input Device - surface

PRESENCE DETECTOR

EAN 4007841064389
E-Nr. 535900047

Wiring Diagrams

WIRING DIAGRAM 1



Circuit diagram for interconnecting DALI-2 APC with DALI-2 IPD

IR Quattro HD-2 24m DALI-2 Input Device - surface

EAN 4007841064389

E-Nr. 535900047

PRESENCE DETECTOR

Highlights



UV-resistant plastic

IR Quattro HD-2 24m DALI-2 Input Device - surface

PRESENCE DETECTOR

EAN 4007841064389
E-Nr. 535900047

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841067335	Relais REL5A-Bluetooth	System components
 4007841067342	Tasterkoppler PC4-Bluetooth	System components

ORDERING INFORMATION

Art.-Nr.

064389

EAN

4007841064389

E-Number

535900047

Typ

IR Quattro HD-2 24m DALI-2 Input Device - surface

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss