

IS 3360 KNX - in-ceiling installation, rd. white

neva
lux**MOTION AND PRESENCE DETECTOR**

EAN 4007841079666

E-Nr. 535918148

 **steinel**

124 x 121 mm



IS 3360 KNX - in-ceiling installation, rd. white

MOTION AND PRESENCE DETECTOR

EAN 4007841079666

E-Nr. 535918148

Technical Data

IDENTIFICATION			
Version	Motion and Presence Detector	Mounting height	2,50 – 4,00 m
		Presence range	Ø 3 m (7 m²)
		Optimal mounting height	2,8 m
DIMENSIONS		CONNECTIVITY	
Dimensions L x W x H	121 x 94 x 94 mm	Networking	Yes
Dimensions Ø x H	124 x 121 mm	Type of networking	Master/slave
ELECTRICAL		Networking via	KNX bus
Supply voltage detail	KNX bus	KNX functions	Photo-cell controller Basic light level function Light level HVAC output Constant- lighting control Light output 2x Presence output Day / night function Logic gate
SENSOR TECHNOLOGY		With bus coupler	Yes
Max. mounting height	4,00 m	LIGHTING TECHNOLOGY	
Sensor technology	passive infrared	Soft light start	Yes
With motion detector	Yes	Continuous light	selectable
Detection angle	360 °	Constant light regulation	Yes
Opening angle	180 °	SETTINGS	
Sneak-under protection	Yes	Twilight switch	Yes
Segment-by-segment masking	Yes	Twilight setting	2 – 1000 lx
Electronic scalability	No	Time setting	5 s – 15 Min.
Mechanical scalability	No	Base light function	Yes
Radial range	Ø 8 m (50 m²)		
Tangential range	Ø 40 m (1257 m²)		
Switching zones	1416 switching zones		
		Main light adjustable	0 - 100 %
		Settings via	ETS software Remote control Bus Smart Remote
		Twilight setting teach	Yes
		HOUSING & MATERIAL	
		Protection class (IP)	IP20
		Ambient temperature	from -20 up to 50 °C
		Mounting location	ceiling
		Application location	Indoors
		Mounting type	In-ceiling installation
		Material	Plastic
		Application room	Indoors WC / washroom changing room function room / ancillary room multi-storey / underground car park production facilities reception / lobby recreation room sports hall stairwell warehouse
		Colour	white
		RAL colour	9003
		SCOPE OF DELIVERY & WARRANTY	
		Manufacturer warranty	5 years
		Corner wall bracket included	No

IS 3360 KNX - in-ceiling installation, rd. white

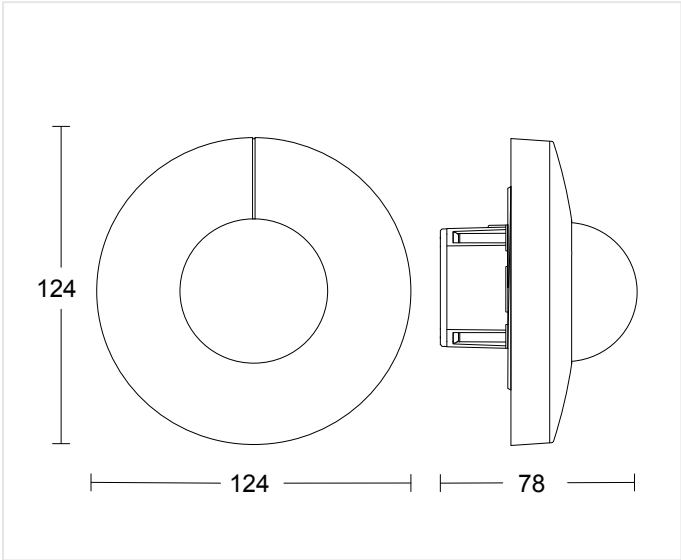
MOTION AND PRESENCE DETECTOR

EAN 4007841079666

E-Nr. 535918148

Illustrations

TECHNICAL DRAWINGS



124 x 121 mm

MOUNTING HEIGHT

2,50 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
---	-------------------------------------	----------------------------------

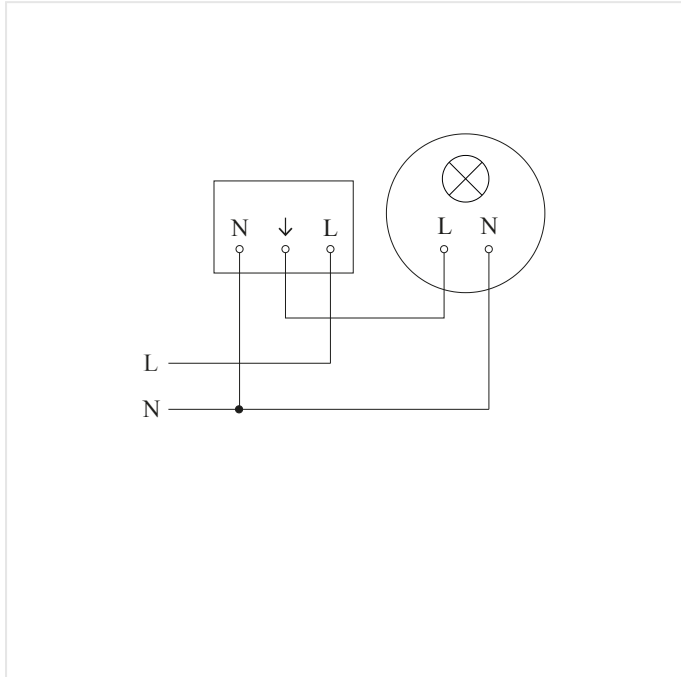
IS 3360 KNX - in-ceiling installation, rd. white

EAN 4007841079666

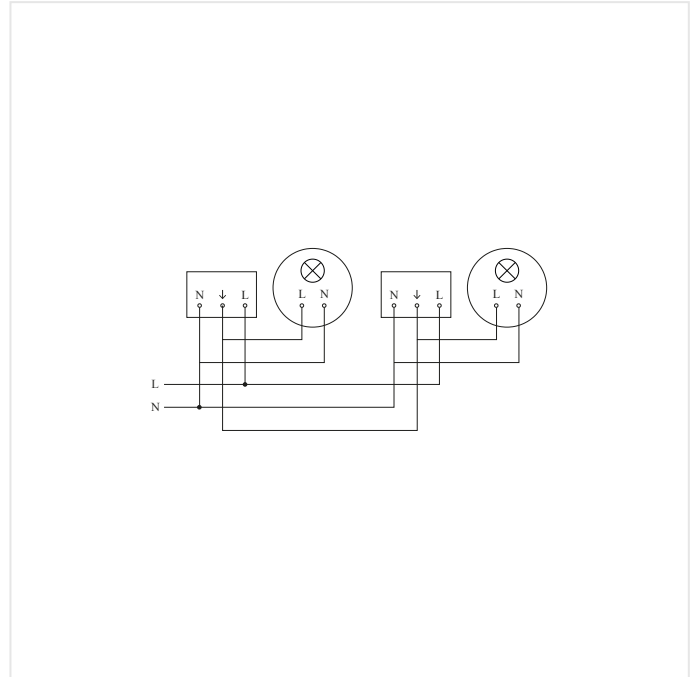
E-Nr. 535918148

MOTION AND PRESENCE DETECTOR

Wiring Diagrams

WIRING DIAGRAM 1

Master circuit diagram

WIRING DIAGRAM 2

Master/slave interconnection circuit diagram

IS 3360 KNX - in-ceiling installation, rd. white

MOTION AND PRESENCE DETECTOR

EAN 4007841079666

E-Nr. 535918148

Highlights



UV-resistant plastic



Optional remote controls



Smart Remote remote control optional

IS 3360 KNX - in-ceiling installation, rd. white

MOTION AND PRESENCE DETECTOR

EAN 4007841079666
E-Nr. 535918148

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841593018	Service Fernbedienung RC6 KNX	Other
 4007841009151	Smart Remote	Accessory
 4007841592912	Nutzer Fernbedienung RC7 KNX	Accessory
 4007841056742	Schwarze Blende für IR-Sensoren Unterputz rund	Accessory

ORDERING INFORMATION

Art.-Nr.

079666

EAN

4007841079666

E-Number

535918148

Typ

IS 3360 KNX - in-ceiling installation, rd. white

nevalux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss