# DL Vario Quattro S Anthracite

**SENSOR-SWITCHED LED OUTDOOR LIGHT**

EAN 4007841057602
E-Nr. 941300139

- Including STEINEL LED system
- Integrated sensor lenses
- 4 infrared sensors adjustable in every direction
- Reach adjusts in 4directions
- 4-hour manual override (optional)
- Impact-resistant material rated to IK07

310 x 69 mm



# DL Vario Quattro S Anthracite

**SENSOR-SWITCHED LED OUTDOOR LIGHT**

EAN **4007841057602**
E-Nr. **941300139**

# Technical Data

## DIMENSIONS

| | |
|---|---|
| Dimensions Ø × H | **310 x 69 mm** |

## ELECTRICAL

| | |
|---|---|
| Mains connection | **220 – 240 V / 50 – 60 Hz** |
| Power | **9,8 W** |
| Own consumption | **0,5 W** |

## SENSOR TECHNOLOGY

| | |
|---|---|
| Max. mounting height | **6,00 m** |
| Sensor technology | **Passiv Infrarot** |
| With motion detector | **Yes** |
| Opening angle | **180 °** |
| Sneak-under protection | **Yes** |
| Segment-by-segment masking | **No** |
| Electronic scalability | **No** |
| Mechanical scalability | **No** |
| Range detail | **Reichweite von 2 - 8 m in 4 Richtungen (je 90 °) einstellbar** |
| Radial range | **4 x 4 m (16 m²)** |
| Tangential range | **16 x 16 m (256 m²)** |
| Mounting height | **2,00 – 6,00 m** |
| Optimal mounting height | **2,8 m** |

## CONNECTIVITY

| | |
|---|---|
| Networking | **Nein** |
| Slave mode adjustable | **No** |
| Control technology | **On/Off-Leuchte** |

## LIGHTING TECHNOLOGY

| | |
|---|---|
| Measured luminous flux 360° | **1000 lm** |
| Efficiency | **100 lm/W** |
| Colour temperature | **3000 K** |
| LED colour deviation | **SDCM3** |
| Colour rendering index | **80-89** |
| With illuminant | **Ja, STEINEL LED-System** |
| Illuminant | **LED nicht austauschbar** |
| Base | **Ohne** |
| LED cooling system | **Passive Thermo Control** |
| Soft light start | **Yes** |
| Continuous light | **schaltbar, 4 h** |

## LIFETIME

| | |
|---|---|
| LED lifetime max. °C | **50000 Std** |
| LED lifetime L70B50 25°C | **> 60000 Std** |

## SETTINGS

| | |
|---|---|
| Twilight switch | **Ja** |
| Twilight setting | **2 – 1000 lx** |
| Time setting | **5 s – 30 Min.** |
| Base light function | **Ja** |
| Base light function time | **10/30 Min., ganze Nacht** |
| Settings via | **Potis** |
| With remote control | **No** |
| Twilight setting teach | **No** |
| Base light function in percent | **10 %** |
| Base light function percent from | **10** |

## HOUSING & MATERIAL

| | |
|---|---|
| Impact resistance | **IK07** |
| Protection class (IP) | **IP54** |
| Protection class | **II** |
| Ambient temperature | **-20 – 35 °C** |
| Housing material | **Kunststoff** |
| Cover material | **Kunststoff strukturiert** |
| Mounting location | **Decke** |
| Application location | **Aussenbereich** |
| Mounting type | **Aufputz** |
| Material | **Kunststoff** |
| Application room | **Flur / Gang Funktionsraum / Nebenraum Treppenhaus Aussenbereich Hauseingang Hof & Einfahrt Innenbereich** |
| Colour | **Anthrazit** |

## SCOPE OF DELIVERY & WARRANTY

| | |
|---|---|
| Manufacturer warranty | **3 Jahre** |

## CERTIFICATES & EPREL

| | |
|---|---|
| Certificates | **DEKRA EMV** |
| EPREL category | **Umgebenes Produkt mit integrierter Lichtquelle** |


# DL Vario Quattro S Anthracite

**SENSOR-SWITCHED LED OUTDOOR LIGHT**

EAN **4007841057602**
E-Nr. **941300139**

## Illustrations

### TECHNICAL DRAWINGS

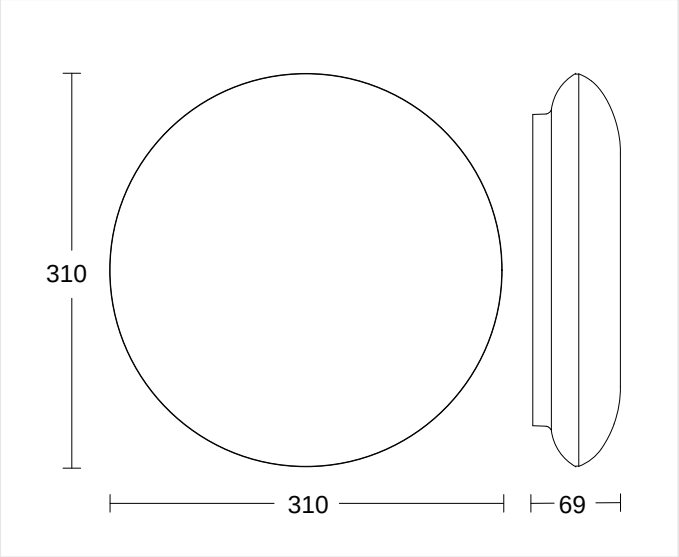


310 x 69 mm

### MOUNTING HEIGHT

| 2,00 – 6,00 m | 2,8 m | 6,00 m |
|---|---|---|
| BEREICH | OPTIMAL | MAX |


# DL Vario Quattro S Anthracite

**SENSOR-SWITCHED LED OUTDOOR LIGHT**

EAN **4007841057602**
E-Nr. **941300139**

## Wiring Diagrams

### WIRING DIAGRAM 1

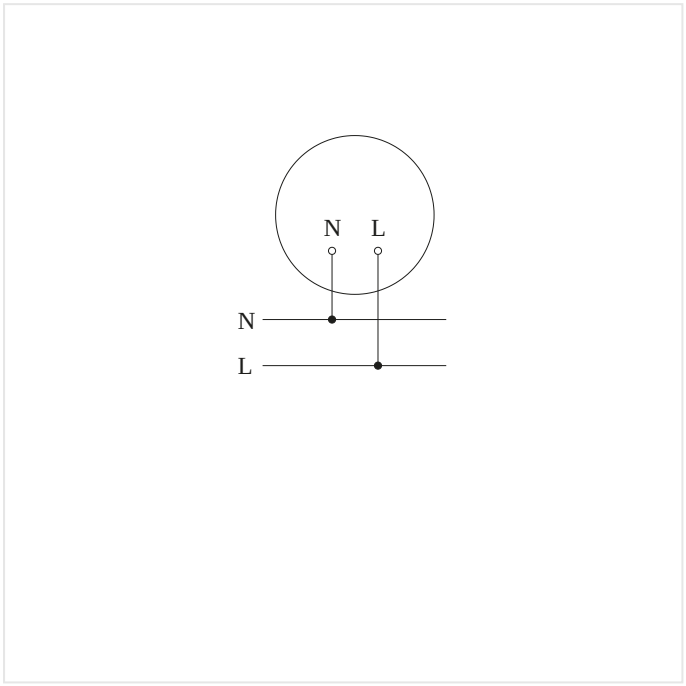


Circuit diagram

# DL Vario Quattro S Anthracite

**SENSOR-SWITCHED LED OUTDOOR LIGHT**

EAN **4007841057602**
E-Nr. **941300139**

## Accessories

**ORDERING INFORMATION**

| | |
|---|---|
| Art.-Nr. | 4007841057602 |
| EAN | 4007841057602 |
| E-Number | 941300139 |
| Typ | **DL Vario Quattro S Anthracite** |

neva lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss