

Spot DUO SC with motion detector & Bluetooth

neva
lux

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841058654

E-Nr. 941200289

- Swivel-mounted wall spotlight with motion detector for stylish lighting accents around the house
- Elegant and puristic design made of high-quality aluminium, spotlight heads can be tilted 180° horizontally and 90° vertically
- Wireless networking via Bluetooth and easy setting via STEINEL Connect App
- Automatic light thanks to two 90° infrared sensors with up to 10 m detection of movement
- Functions: Twilight-controlled light, integrated timer, night economy mode, 4 hours continuous light
- Incl. 2x GU-10 LED bulbs with warm white light (3000 K) with 512 lm} at 7,3 W each
- Incl. mounting accessories - plastic-free packaging

● steinel

175 x 247 x 98 mm



Spot DUO SC with motion detector & Bluetooth

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841058654

E-Nr. 941200289

Technical Data

DIMENSIONS		Slave mode adjustable		Yes	Twilight setting teach		Yes
Dimensions L x W x H		175 x 247 x 98 mm			HOUSING & MATERIAL		
ELECTRICAL		LIGHTING TECHNOLOGY			Impact resistance		IK03
Mains connection		220 – 240 V / 50 – 60 Hz			Protection class (IP)		IP44
Power		14,6 W			Protection class		I
SENSOR TECHNOLOGY		Measured luminous flux 360°		1024 lm	Ambient temperature		from -20 up to 40 °C
Max. mounting height		2,50 m			Housing material		Aluminium
Sensor technology		passive infrared			Cover material		Plastic, transparent
With motion detector		Yes			Mounting location		wall
Detection angle		90 °			Application location		Outdoors
Opening angle		90 °			Mounting type		Surface wiring
Sneak-under protection		No			Application room		all round the building courtyard & driveway outdoors terrace / balcony
Segment-by-segment masking		No			Colour		Anthracite
Electronic scalability		No			SCOPE OF DELIVERY & WARRANTY		
Mechanical scalability		No			Manufacturer warranty		3 years
Radial range		r = 2 m (3 m²)			Corner wall bracket included		No
Tangential range		r = 10 m (79 m²)			CERTIFICATES & EPREL		
Mounting height		1,8 – 2,5 m			EPREL energy efficiency class		F
Optimal mounting height		2 m			EPREL category		Surrounded product with separate light source (e.g. E27)
CONNECTIVITY		LIFETIME					
Networking		LED lifetime L70B50 25°C		> 20000 h			
Networking via		SETTINGS					
		Twilight switch		Yes			
		Twilight setting		2 – 2000 lx			
		Time setting		5 s – 60 Min.			
		Base light function		No			
		Main light adjustable		No			
		Functions		Timer Master/slave override			
		Settings via		Bluetooth			

Spot DUO SC with motion detector & Bluetooth


SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841058654

E-Nr. 941200289

Illustrations

TECHNICAL DRAWINGS

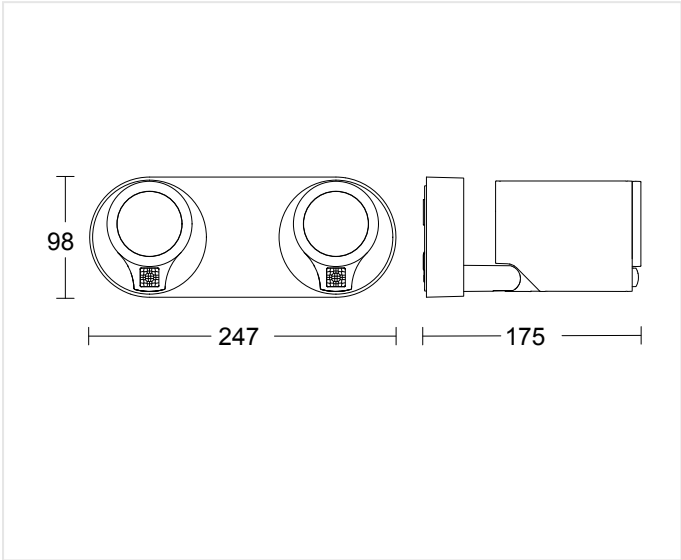

175 x 247 x 98 mm

MOUNTING HEIGHT

1,8 – 2,5 m BEREICH	2 m OPTIMAL	2,50 m MAX
------------------------	----------------	---------------

Spot DUO SC with motion detector & Bluetooth


SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841058654

E-Nr. 941200289


Wiring Diagrams

WIRING DIAGRAM 1

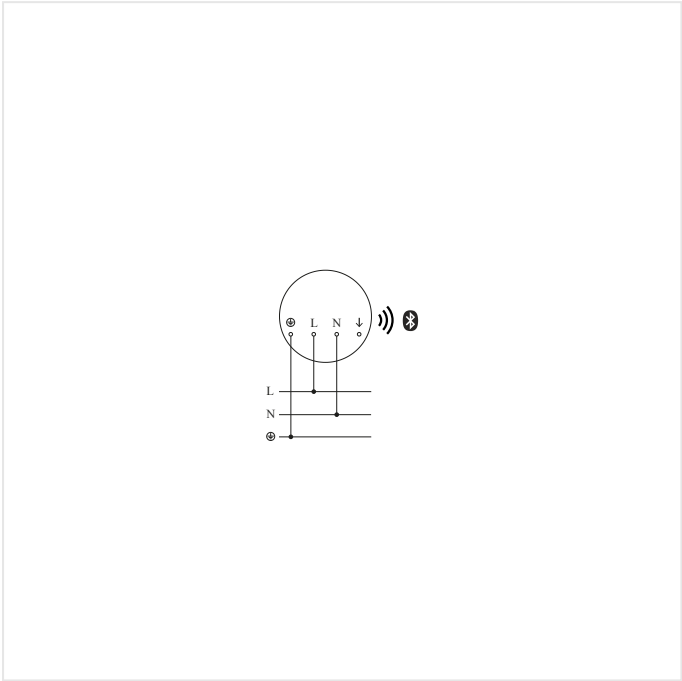

Circuit diagram Bluetooth

WIRING DIAGRAM 2

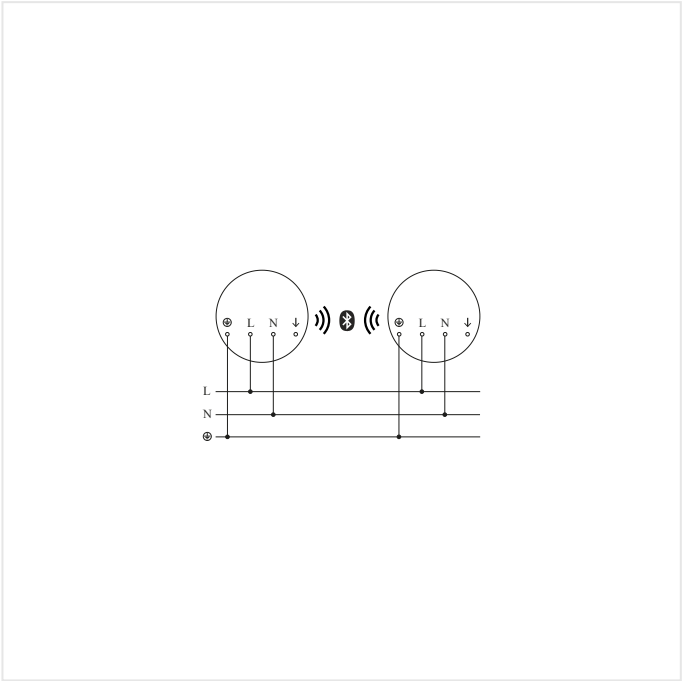

Master/master bluetooth interconnection circuit diagram

Spot DUO SC with motion detector & Bluetooth

SENSOR-SWITCHED LED FLOODLIGHT


EAN 4007841058654

E-Nr. 941200289

Highlights



Including GU10 LED lamp

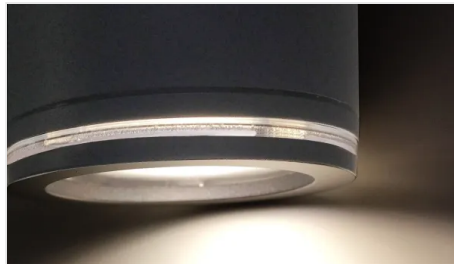


LED ambient light



High-quality aluminium



4-hour manual override (optional)

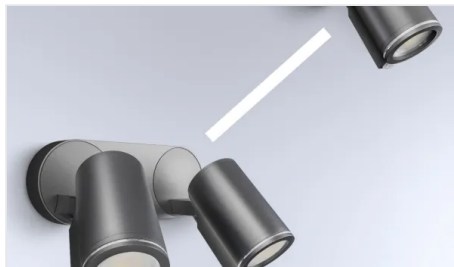

Interconnectable and adjustable via Bluetooth

Spot DUO SC with motion detector & Bluetooth

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841058654

E-Nr. 941200289

Accessories

ORDERING INFORMATION	
Art.-Nr.	058654
EAN	4007841058654
E-Number	941200289
Typ	Spot DUO SC with motion detector & Bluetooth

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss