

RS 200 C without motion detector, with Bluetooth

neva
lux**LED INDOOR LIGHT WITHOUT SENSOR**

EAN 4007841078775

E-Nr. 941012789

- Indoor light without motion detector, with high-quality anthracite-coloured aluminium housing
- With pleasant ambient light for a beautiful room atmosphere, suitable for ceiling and wall mounting
- Wireless networking via Bluetooth and easy setting via STEINEL Connect App
- Functions: adjustable main light
- Warm white light (3000 K) and long-life 17,1 W LEDs with 1165 lm
- Incl. mounting accessories - plastic-free packaging

 **steinel**

263 x 53 mm



RS 200 C without motion detector, with Bluetooth

LED INDOOR LIGHT WITHOUT SENSOR

EAN 4007841078775
E-Nr. 941012789

Technical Data

DIMENSIONS				HOUSING & MATERIAL	
Dimensions Ø × H	263 x 53 mm	Colour temperature	3000 K	Impact resistance	IK10
ELECTRICAL		LED colour deviation	SDCM3	Protection class (IP)	IP54
Mains connection	220 – 240 V / 50 – 60 Hz	With illuminant	Yes, STEINEL LED system	Protection class	I
Power	17,1 W	Illuminant	LED cannot be replaced	Ambient temperature	from -20 up to 40 °C
Own consumption	0,5 W	LED cooling system	Passive Thermo Control	Housing material	Aluminium
SENSOR TECHNOLOGY		Soft light start	Yes	Cover material	Plastic, opal
Max. mounting height	4,00 m	Efficiency without cover	68 lm/W	Mounting location	ceiling wall
Transmission power	< 1 mW	LIFETIME		Application location	Indoors
HF technology	5,8 GHz	LED lifetime L70B50 25°C	> 36000 h	Mounting type	Surface wiring
With motion detector	No	SETTINGS		Material	Aluminium
Mounting height	2,00 – 4 m	Base light function	Yes	Application room	Indoors corridor / aisle function room / ancillary room recreation room stairwell
Optimal mounting height	2,8 m	Base light function detail	LED effect light	Colour	Anthracite
CONNECTIVITY		Base light function time	1-60 min	SCOPE OF DELIVERY & WARRANTY	
Networking	Yes	Settings via	Bluetooth Smartphone Tablet	Manufacturer warranty	3 years
Type of networking	Master/master	With remote control	No	CERTIFICATES & EPREL	
Networking via	Bluetooth Mesh	Base light function in percent	10 – 100 %	EPREL category	Surrounded product with integrated light source
LIGHTING TECHNOLOGY		Base light function percent from	10 %		
Measured luminous flux 360°	1165 lm				


RS 200 C without motion detector, with Bluetooth

LED INDOOR LIGHT WITHOUT SENSOR

EAN 4007841078775
E-Nr. 941012789

Illustrations

TECHNICAL DRAWINGS

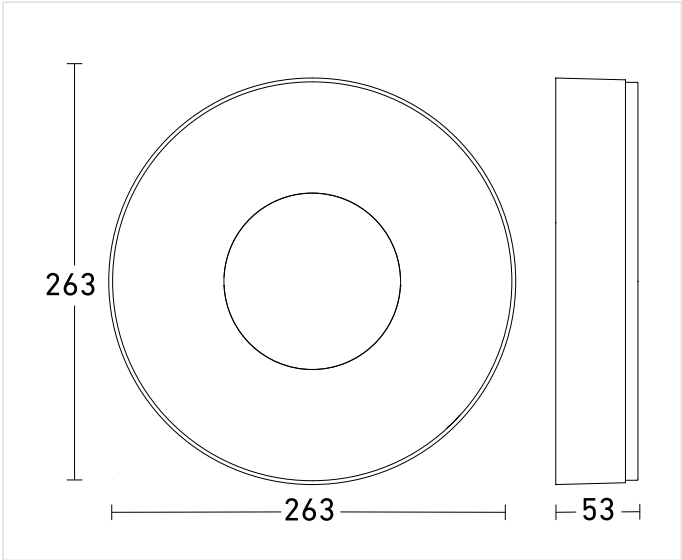

263 x 53 mm

MOUNTING HEIGHT

2,00 – 4 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
-----------------------	------------------	---------------

RS 200 C without motion detector, with Bluetooth


EAN 4007841078775

E-Nr. 941012789

LED INDOOR LIGHT WITHOUT SENSOR

Wiring Diagrams

WIRING DIAGRAM 1

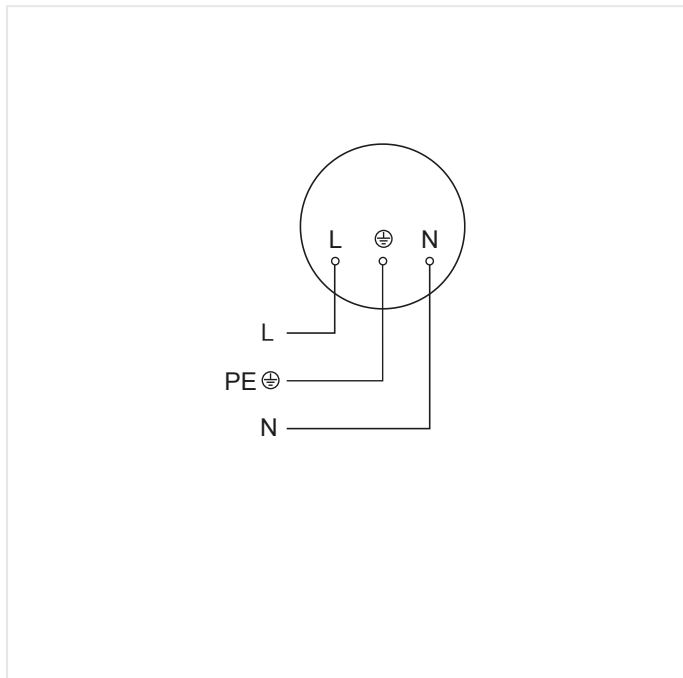

Slave/wireless master interconnection circuit diagram

RS 200 C without motion detector, with Bluetooth

EAN 4007841078775

E-Nr. 941012789

LED INDOOR LIGHT WITHOUT SENSOR


Highlights



Interconnectable and adjustable via Bluetooth



Including STEINEL LED system

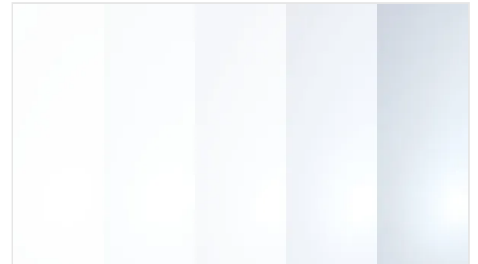

Intelligent soft light start (only with bluetooth sensor product)

RS 200 C without motion detector, with Bluetooth

LED INDOOR LIGHT WITHOUT SENSOR

EAN 4007841078775
E-Nr. 941012789

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841088620	Funkschalter TapDuo C	System components

ORDERING INFORMATION

Art.-Nr.

078775

EAN

4007841078775

E-Number

941012789

Typ

RS 200 C without motion detector, with Bluetooth

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss