

IS 3360 40m COM1 - surface, sq. black

PRESENCE DETECTOR

neva
lux

EAN 4007841068523

E-Nr. 535918115

● steinel

65 x 95 x 95 mm



IS 3360 40m COM1 - surface, sq. black

PRESENCE DETECTOR

EAN 4007841068523

E-Nr. 535918115

Technical Data

IDENTIFICATION

Version	Motion and Presence Detector
---------	------------------------------

DIMENSIONS

Dimensions L x W x H 65 x 95 x 95 mm

ELECTRICAL

Mains connection	220 – 240 V / 50 – 60 Hz
Power	2000 W
Switching output 1 resistive	2000 W
Fluorescent lamps ECG	1500 W
Fluorescent lamps uncompensated	1000 VA
Fluorescent lamps series-compensated	400 VA
Fluorescent lamps parallel-compensated	400 VA
Switching output 1 low-voltage halogen lamps	2000 VA
LED lamps < 2 W	100 W
LED lamps > 2 W < 8 W	300 W
LED lamps > 8 W	600 W
Capacitive load in μF	176 μF
Switching output 1 number of LED/fluorescent lamps	8 pcs.

SENSOR TECHNOLOGY

Max. mounting height	4,00 m
Sensor technology	passive infrared
With motion detector	Yes

Detection angle	360 °
Opening angle	180 °
Sneak-under protection	Yes
Segment-by-segment masking	Yes
Electronic scalability	No
Mechanical scalability	No
Radial range	Ø 8 m (50 m²)
Tangential range	Ø 40 m (1257 m²)
Switching zones	1416 switching zones
Mounting height	2,50 – 4,00 m
Presence range	Ø 3 m (7 m²)
Optimal mounting height	2,8 m

CONNECTIVITY

Networking	Yes
Type of networking	Master/master
Networking via	Cable
Networking quantity	max. 10 sensors

LIGHTING TECHNOLOGY

Soft light start	No
Continuous light	selectable, 4h
Constant light regulation	No

SETTINGS

Twilight switch	Yes
Twilight setting	2 – 1000 lx
Time setting	5 s – 15 Min.

Base light function	No
Main light adjustable	No
Functions	Normal / test mode Manual ON / ON-OFF
Settings via	Remote control Potentiometers Smart Remote
With remote control	No
Twilight setting teach	Yes

HOUSING & MATERIAL

Protection class (IP)	IP54
Ambient temperature	from -20 up to 50 °C
Mounting location	ceiling
Application location	Indoors Outdoors
Mounting type	Surface wiring
Material	Plastic
Application room	Indoors WC / washroom changing room function room / ancillary room multi-storey / underground car park outdoors production facilities reception / lobby recreation room sports hall stairwell warehouse

Colour	black
RAL colour	9005

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	5 years
Corner wall bracket included	No

IS 3360 40m COM1 - surface, sq. black

PRESENCE DETECTOR

EAN 4007841068523
E-Nr. 535918115

Illustrations

TECHNICAL DRAWINGS



65 x 95 x 95 mm

MOUNTING HEIGHT

2,50 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------------	------------------	---------------

IS 3360 40m COM1 - surface, sq. black


PRESENCE DETECTOR

EAN 4007841068523

E-Nr. 535918115


Wiring Diagrams

WIRING DIAGRAM 1

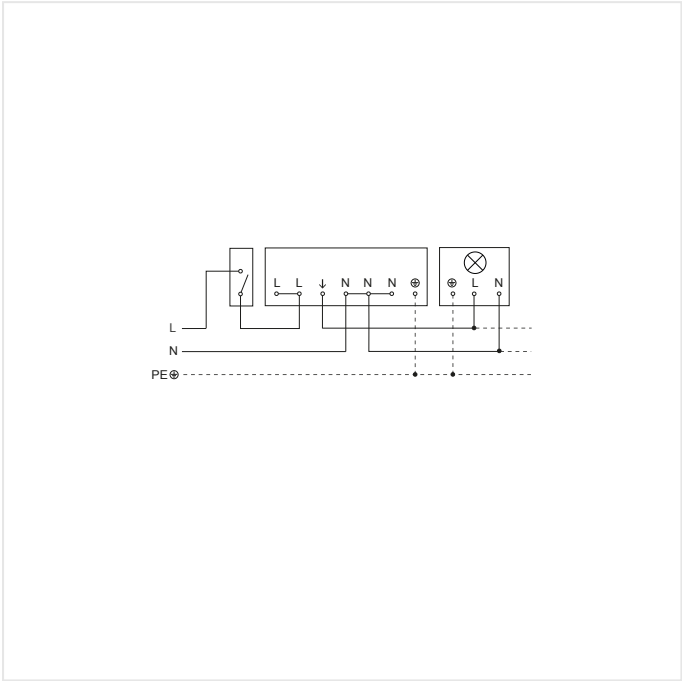

Light without neutral conductor

WIRING DIAGRAM 2

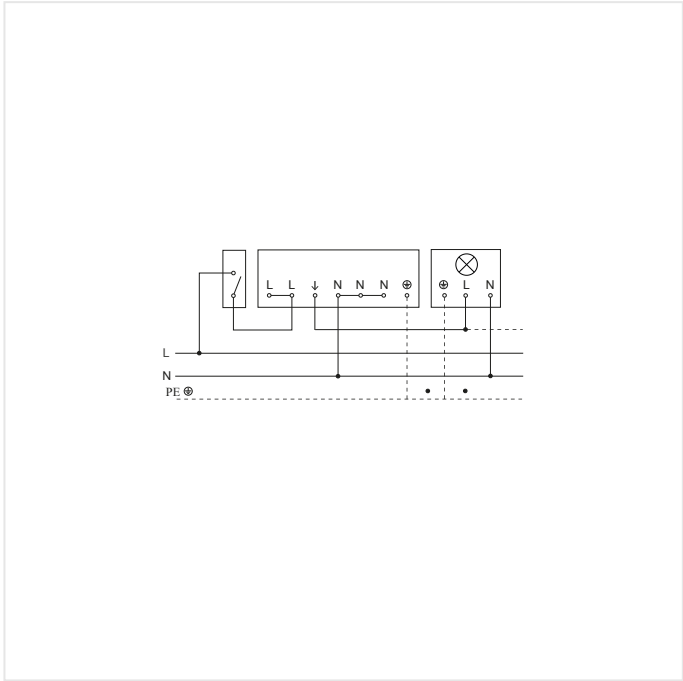

Circuit diagram for interconnecting several sensors

IS 3360 40m COM1 - surface, sq. black

PRESENCE DETECTOR

EAN 4007841068523

E-Nr. 535918115

Highlights



UV-resistant plastic



Large terminal compartment



Optional remote controls

IS 3360 40m COM1 - surface, sq. black

PRESENCE DETECTOR

EAN 4007841068523
E-Nr. 535918115

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841559410	Service Fernbedienung RC8	Accessory
 4007841009151	Smart Remote	Accessory
 4007841056711	Schwarze Blende für IR-Sensoren Aufputz eckig	Accessory
 4007841056735	Schwarze Blende für IR-Sensoren Aufputz rund	Accessory

ORDERING INFORMATION

Art.-Nr.

068523

EAN

4007841068523

E-Number

535918115

Typ

IS 3360 40m COM1 - surface, sq. black

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss