

US 360 KNX - in-ceiling installation

PRESENCE DETECTOR

neva
lux

EAN 4007841079628

E-Nr. 535934008

● steinel

105 x 120 x 120 mm



US 360 KNX - in-ceiling installation

PRESENCE DETECTOR

EAN 4007841079628

E-Nr. 535934008

Technical Data

IDENTIFICATION		US technology		40 kHz		Main light adjustable		0 - 100 %																	
Version		Presence detector		Optimal mounting height		3,5 m		Settings via		ETS software Remote control Bus Smart Remote															
DIMENSIONS		CONNECTIVITY		Networking		Yes		Twilight setting teach		Yes															
Dimensions L × W × H		105 x 120 x 120 mm		Type of networking		Master/master Master/slave		HOUSING & MATERIAL		Protection class (IP)		IP20													
ELECTRICAL		Networking via		KNX bus		KNX functions		Ambient temperature		from -20 up to 55 °C		Mounting location		ceiling											
Mains connection		24 – 29 V		Photo-cell controller Basic light level function Light level HVAC output Constant- lighting control Light output 4x Presence output Day / night function Logic gate		With bus coupler		Yes		Application location		Indoors		Mounting type		In-ceiling installation									
SENSOR TECHNOLOGY		LIGHTING TECHNOLOGY		Soft light start		Yes		Material		Plastic		Application room		Indoors WC / washroom classroom conference room / meeting room duty room function room / ancillary room one-person office open-plan office recreation room stairwell		Colour		white							
Max. mounting height		2,80 m		Continuous light		selectable		RAL colour		9010		SCOPE OF DELIVERY & WARRANTY		Manufacturer warranty		5 years		Corner wall bracket included		No					
Sensor technology		Ultrasonic		Constant light regulation		Yes		Twilight switch		Yes		Twilight setting		10 – 1000 lx		Time setting		0 s – 1092 Min.		Base light function		Yes			
With motion detector		Yes		SETTINGS		Twilight switch		Yes		Twilight setting		10 – 1000 lx		Time setting		0 s – 1092 Min.		Base light function		Yes		Base light function time		1-30 min, all night	
Detection angle		360 °		Twilight setting		10 – 1000 lx		Time setting		0 s – 1092 Min.		Base light function		Yes		Base light function time		1-30 min, all night							
Opening angle		180 °		Base light function		Yes		Base light function time		1-30 min, all night															
Sneak-under protection		Yes																							
Segment-by-segment masking		No																							
Electronic scalability		Yes																							
Mechanical scalability		No																							
Radial range		Ø 10 m (79 m²)																							
Tangential range		Ø 6 m (28 m²)																							
Mounting height		2,50 – 2,8 m																							
Presence range		Ø 6 m (28 m²)																							

US 360 KNX - in-ceiling installation


PRESENCE DETECTOR

EAN 4007841079628

E-Nr. 535934008

Illustrations

TECHNICAL DRAWINGS

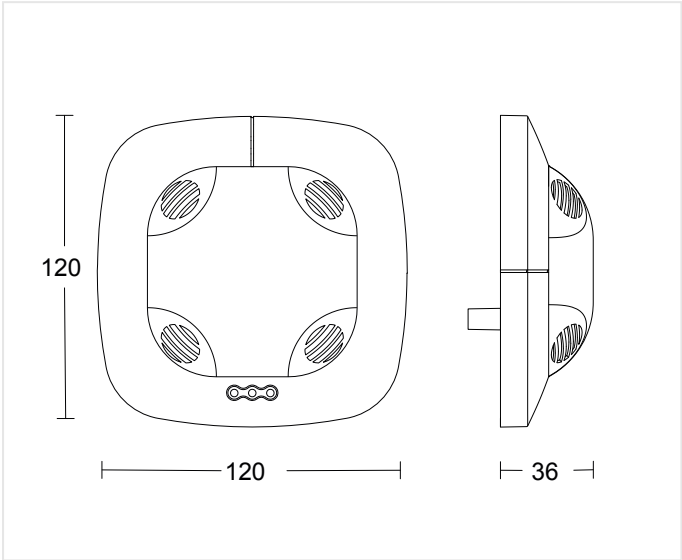

105 x 120 x 120 mm

MOUNTING HEIGHT

2,50 – 2,8 m BEREICH	3,5 m OPTIMAL	2,80 m MAX
-------------------------	------------------	---------------

US 360 KNX - in-ceiling installation

PRESENCE DETECTOR


EAN 4007841079628

E-Nr. 535934008


Highlights




Optional remote controls

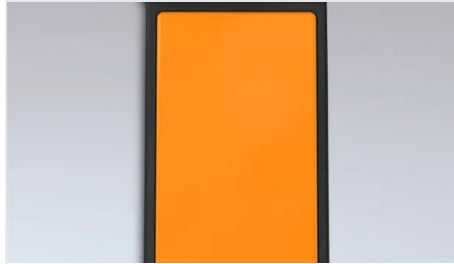

Smart Remote remote control optional

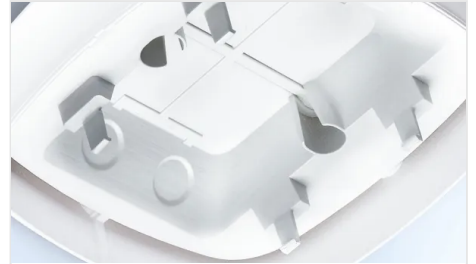

Optional surface-mounting adapter

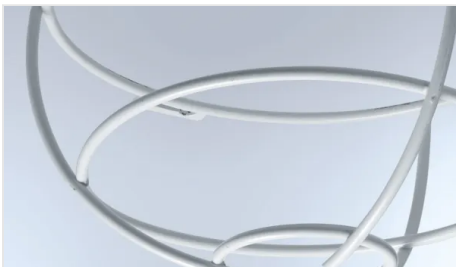

Optional guard cage

US 360 KNX - in-ceiling installation

PRESENCE DETECTOR

EAN 4007841079628
E-Nr. 535934008

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841003036	Control PRO Schutzkorb	Accessory
 4007841009151	Smart Remote	Accessory
 4007841593018	Service Fernbedienung RC6 KNX	Other
 4007841592912	Nutzer Fernbedienung RC7 KNX	Accessory

ORDERING INFORMATION

Art.-Nr.

079628

EAN

4007841079628

E-Number

535934008

Typ

US 360 KNX - in-ceiling installation

nevalux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss