Dual HF DALI-2 APC - in-ceiling installation

PRESENCE DETECTOR

EAN 4007841079499
E-Nr. 535934608

steinel

112 x 120 x 120 mm



Dual HF DALI-2 APC - in-ceiling installation

PRESENCE DETECTOR

EAN **4007841079499**
E-Nr. **535934608**

Technical Data

IDENTIFICATION

Version	**Presence detector**

DIMENSIONS

Dimensions L × W × H	**112 x 120 x 120 mm**

ELECTRICAL

Mains connection	**230 V / 50 – 60 Hz**
Control output DALI	**Broadcast 2x12 electronic ballasts**

SENSOR TECHNOLOGY

Max. mounting height	**3,50 m**
Sensor technology	**High frequency**
Transmission power	**< 1 mW**
HF technology	**5,8 GHz**
Detection	**also through glass, wood and stud walls**
Detection angle	**360 °**
Opening angle	**140 °**
Sneak-under protection	**Yes**
Segment-by-segment masking	**No**
Electronic scalability	**Yes**
Mechanical scalability	**No**
Radial range	**20 x 3 m (60 m²)**
Tangential range	**20 x 3 m (60 m²)**
Mounting height	**2,50 – 3,50 m**
Optimal mounting height	**2,8 m**

CONNECTIVITY

Networking	**Yes**
Type of networking	**Master/slave**
With bus coupler	**Yes**
Networking via	**DALI 2**

LIGHTING TECHNOLOGY

Soft light start	**Yes**
Continuous light	**selectable**
Constant light regulation	**Yes**

SETTINGS

Twilight switch	**Yes**
Twilight setting	**10 – 1000 lx**
Time setting	**30 s – 30 Min.**
Base light function	**Yes**
Base light function time	**1-60 min, all night**
Main light adjustable	**50 - 100 %**
Functions	**Normal / test mode Semi-/fully automatic Pushbutton / switch mode Manual ON / ON-OFF Constant-lighting control ON-OFF**
Settings via	**Remote control DIP switches Potentiometers Smart Remote**
With remote control	**No**
Twilight setting teach	**Yes**
Base light function in percent	**10 – 60 %**
Base light function percent from	**10 %**

HOUSING & MATERIAL

Protection class (IP)	**IP20**
Ambient temperature	**from -25 up to 55 °C**
Mounting location	**ceiling**
Application location	**Indoors**
Mounting type	**In-ceiling installation**
Material	**Plastic**
Application room	**Indoors corridor / aisle**
Colour	**white**
RAL colour	**9010**

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	**5 years**
Corner wall bracket included	**No**


Dual HF DALI-2 APC - in-ceiling installation

PRESENCE DETECTOR

EAN **4007841079499**
E-Nr. **535934608**

Illustrations

TECHNICAL DRAWINGS

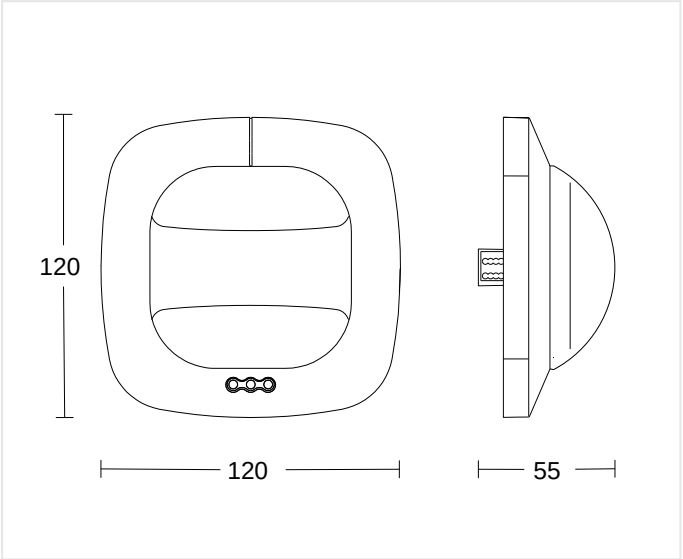

112 x 120 x 120 mm

MOUNTING HEIGHT

2,50 – 3,50 m	2,8 m	3,50 m
BEREICH	OPTIMAL	MAX


Dual HF DALI-2 APC - in-ceiling installation

PRESENCE DETECTOR

EAN **4007841079499**
E-Nr. **535934608**


Wiring Diagrams

WIRING DIAGRAM 1

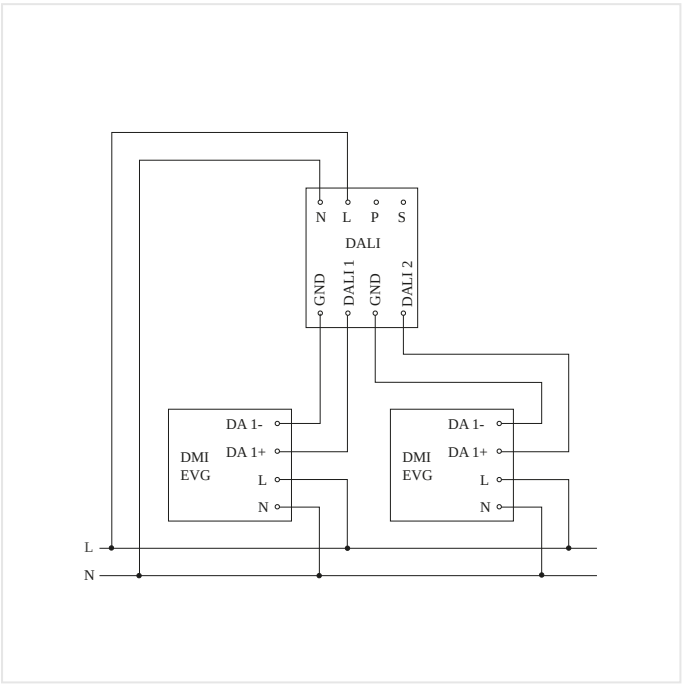

Master circuit diagram

WIRING DIAGRAM 2

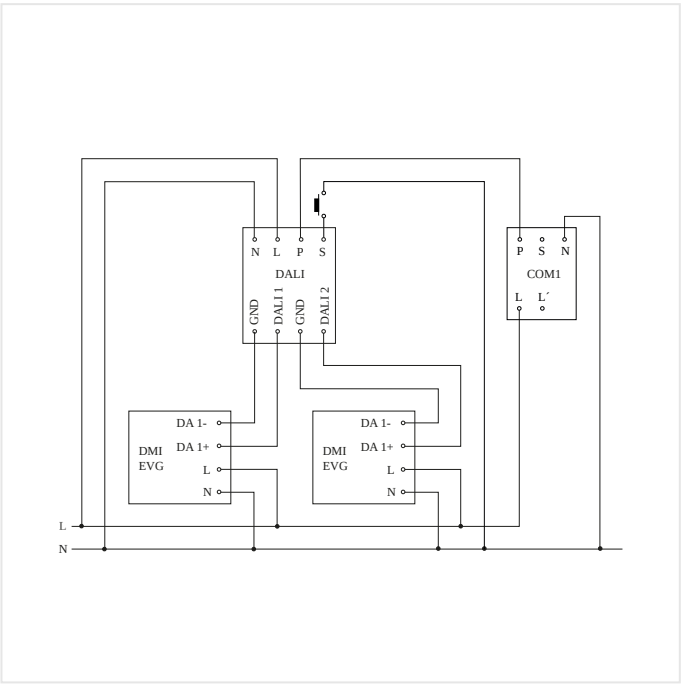

Master/slave interconnection circuit diagram

Dual HF DALI-2 APC - in-ceiling installation


PRESENCE DETECTOR

EAN 4007841079499
E-Nr. 535934608


Highlights



Optional remote controls

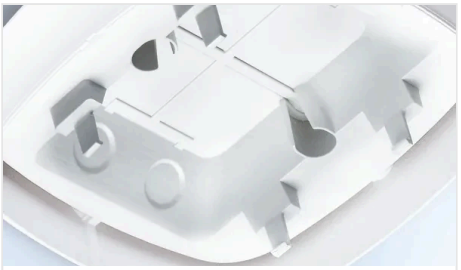

Optional surface-mounting adapter

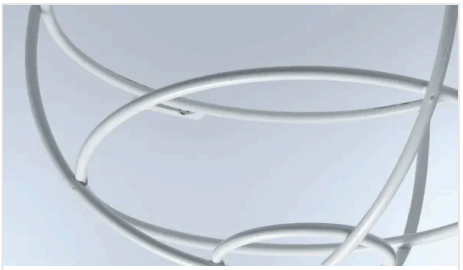

Optional guard cage



HF ceiling adapter for installation in suspended ceilings

Dual HF DALI-2 APC - in-ceiling installation

PRESENCE DETECTOR

EAN **4007841079499**
E-Nr. **535934608**

Accessories

	ARTICLE NUMBER	DESCRIPTION	CATEGORY
	4007841592806	**Nutzer Fernbedienung RC5**	Accessory
	4007841003036	**Control PRO Schutzkorb**	Accessory
	4007841009151	**Smart Remote**	Accessory
	4007841559410	**Service Fernbedienung RC8**	Accessory

ORDERING INFORMATION

Art.-Nr.	079499
EAN	4007841079499
E-Number	535934608
Typ	**Dual HF DALI-2 APC - in-ceiling installation**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss