

XLED CAM2 SC Anthracite

SENSOR-SWITCHED LED FLOODLIGHT

neva
lux

EAN 4007841092603

With the new generation of STEINEL camera lights, you always have house and garden in view. AI features, better resolution and easy control ensure smart security and comfort.

- Better resolution: Now with up to 2K quality for razor-sharp video
- AI on board: Person detection and masking – device-based, no cloud needed
- Improved setup: Fast and easy thanks to setup assistant
- Wi-Fi 6: Stable connection and high data rates
- App control: Watch live, talk & receive alerts via smartphone
- Local storage: Videos saved to microSD (16 GB included, expandable) – no subscription
- Data protection: European servers, no user account – cybersecurity-compliant

● steinel

167 x 210 x 275 mm



XLED CAM2 SC Anthracite

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841092603

Technical Data

DIMENSIONS

Dimensions L x W x H167 x 210 x 275 mm

ELECTRICAL

Mains connection220 – 240 V / 50 – 60 Hz

Power21 W

SENSOR TECHNOLOGY

Max. mounting height2,00 m

Sensor technologypassive infrared

With motion detectorYes

Detection angle180 °

Opening angle45 °

Sneak-under protectionNo

Segment-by-segment maskingNo

Electronic scalabilityYes

Mechanical scalabilityNo

Radial range r = 2 m (6 m²)

Tangential range r = 10 m (157 m²)

Mounting height1,80 – 2 m

Optimal mounting height2 m

CONNECTIVITY

Networking viaWi-Fi

LIGHTING TECHNOLOGY

Measured luminous flux360°2310 lm

Colour temperature3000 K

LED colour deviationSDCM3

Colour rendering index= 80

With illuminantYes, LED lamp

IlluminantLED cannot be replaced

Basewithout

LED cooling systemPassive Thermo Control

Soft light startNo

Continuous lightselectable

LIFETIME

LED lifetime max. °C50000 h

LED lifetime L70B50 25°C> 36000 h

SETTINGS

Twilight switchYes

Twilight setting10 – 10000 lx

Time setting60 s – 15 Min.

Base light functionYes

Base light function timeall night

Main light adjustable30 - 100 %

FunctionsIintercom system Camera

Settings viaWi-Fi

Twilight setting teachNo

Base light function in percent0 – 40 %

Base light function percent from0 %

HOUSING & MATERIAL

Impact resistanceIK03

Protection class (IP)IP44

Protection classI

Ambient temperaturefrom -10 up to 40 °C

Housing materialAluminium

Cover materialGlass transparent

Mounting locationwall

Application locationOutdoors

Mounting typeSurface wiring

Application roomall round the building
courtyard & driveway
outdoors terrace / balcony

ColourAnthracite

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty3 years

Corner wall bracket includedNo

CERTIFICATES & EPREL

EPREL energy efficiency classE

EPREL categoryLight source


XLED CAM2 SC Anthracite

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841092603

Illustrations

TECHNICAL DRAWINGS

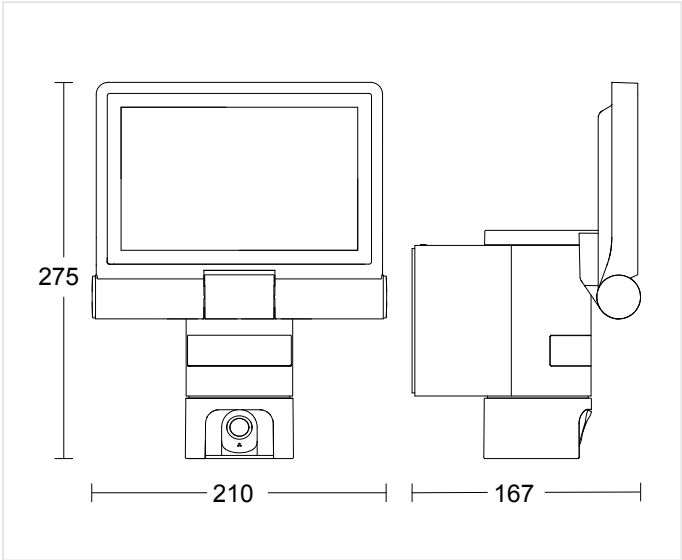

167 x 210 x 275 mm

MOUNTING HEIGHT

1,80 – 2 m BEREICH	2 m OPTIMAL	2,00 m MAX
-----------------------	----------------	---------------


XLED CAM2 SC Anthracite

EAN 4007841092603

SENSOR-SWITCHED LED FLOODLIGHT

Wiring Diagrams

WIRING DIAGRAM 1

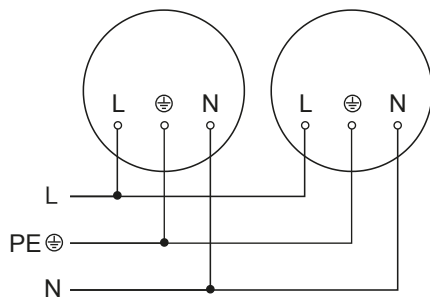

Circuit diagram

XLED CAM2 SC Anthracite


EAN 4007841092603

SENSOR-SWITCHED LED FLOODLIGHT


Highlights



2K wide-angle colour camera, 180° swiveling

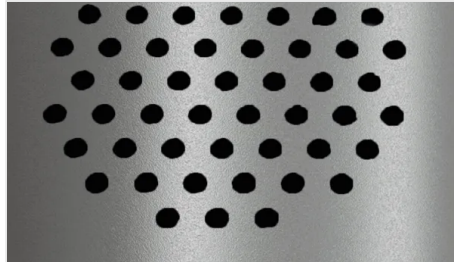

Integrated intercom unit

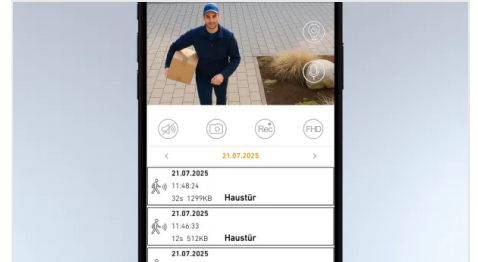

Communication via smartphone



Micro SD card (16 GB included)



High-precision sensor



High-quality aluminium



Optional basic lighting level 0 - 40%

XLED CAM2 SC Anthracite

EAN 4007841092603

SENSOR-SWITCHED LED FLOODLIGHT

Accessories

ORDERING INFORMATION

Art.-Nr. 092603

EAN 4007841092603

Typ XLED CAM2 SC Anthracite

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss