

True Presence KNX - concealed white

PRESENCE DETECTOR

neva
lux

EAN 4007841056339

E-Nr. 535930011

 **steinel**

32 x 103 x 103 mm



True Presence KNX - concealed white

PRESENCE DETECTOR

EAN 4007841056339
E-Nr. 535930011

Technical Data

IDENTIFICATION					
Version	Presence detector	Presence range	Ø 15 m (177 m²)	Settings via	ETS software Bluetooth
		True Presence range	Ø 9 m (64 m²)	With remote control	No
DIMENSIONS		Optimal mounting height	2,8 m	Twilight setting teach	Yes
		CONNECTIVITY		HOUSING & MATERIAL	
ELECTRICAL		Networking	Yes	Protection class (IP)	IP20
Supply voltage detail	KNX bus	Type of networking	Master/master Master/slave	Ambient temperature	from 0 up to 40 °C
SENSOR TECHNOLOGY		Networking via	KNX bus	Mounting location	ceiling
Max. mounting height	12,00 m	KNX functions	Photo-cell controller Basic light level function Light level HVAC output Constant-lighting control Light output 4x Humidity output Presence output Day / night function Dewpoint Temperature output Logic gate	Application location	Indoors
Sensor technology	High frequency			Mounting type	Concealed wiring
Transmission power	< 1 mW			Material	Plastic
HF technology	7,2 GHz			Application room	Indoors WC / washroom care room changing room classroom conference room / meeting room dining hall / staff restaurant duty room high-bay warehouse hotel room kitchenette lecture hall one-person office open-plan office production facilities reception / lobby recreation room sports hall warehouse
With motion detector	Yes				
Detection	also through glass, wood and stud walls	With bus coupler	Yes		
		LIGHTING TECHNOLOGY			
Detection angle	360 °	Soft light start	Yes		
Opening angle	160 °	Continuous light	selectable	Colour	white
Sneak-under protection	Yes	Constant light regulation	Yes	RAL colour	9003
Segment-by-segment masking	No	SETTINGS		SCOPE OF DELIVERY & WARRANTY	
Electronic scalability	Yes	Twilight switch	Yes	Manufacturer warranty	5 years
Mechanical scalability	No	Twilight setting	2 – 1000 lx	Corner wall bracket included	No
Radial range	Ø 15 m (177 m²)	Time setting	30 s – 1092 Min.		
Tangential range	Ø 15 m (177 m²)	Base light function	Yes		
Mounting height	2,00 – 12,00 m	Main light adjustable	0 - 100 %		

True Presence KNX - concealed white


PRESENCE DETECTOR

EAN 4007841056339

E-Nr. 535930011

Illustrations

TECHNICAL DRAWINGS

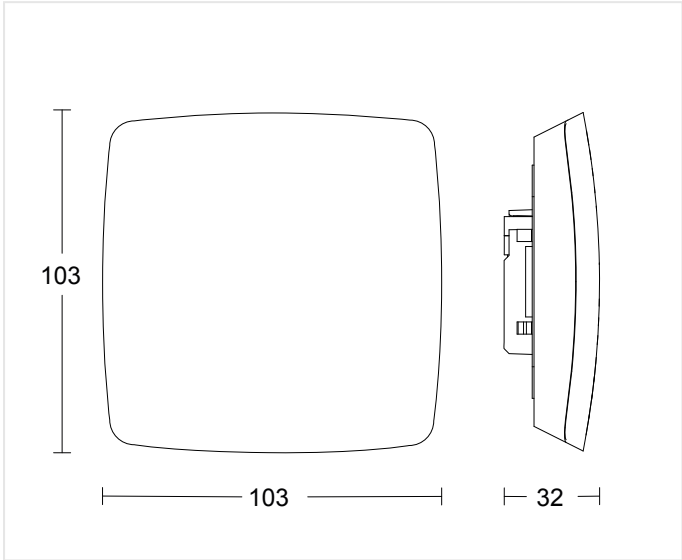

32 x 103 x 103 mm

MOUNTING HEIGHT

2,00 – 12,00 m BEREICH	2,8 m OPTIMAL	12,00 m MAX
--	-------------------------------------	-----------------------------------

True Presence KNX - concealed white

PRESENCE DETECTOR


EAN 4007841056339

E-Nr. 535930011

Highlights



UV-resistant plastic

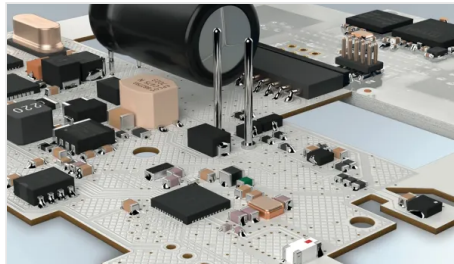


Digital high frequency sensor

True Presence KNX - concealed white

PRESENCE DETECTOR

EAN 4007841056339
E-Nr. 535930011

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841063887	Aufputz Adapter True Presence KNX weiss	Accessory

ORDERING INFORMATION

Art.-Nr.

056339

EAN

4007841056339

E-Number

535930011

Typ

True Presence KNX - concealed white

nevalux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss