

IS 3360 KNX - in-ceiling installation, sq. white

neva
lux**PRESENCE DETECTOR**

EAN 4007841079642

E-Nr. 535918139

 **steinel**

121 x 94 x 94 mm



IS 3360 KNX - in-ceiling installation, sq. white

PRESENCE DETECTOR

EAN 4007841079642

E-Nr. 535918139

Technical Data

IDENTIFICATION		Mounting height		2,50 – 4,00 m		Main light adjustable		0 - 100 %	
Version	Motion and Presence Detector	Presence range		Ø 3 m (7 m²)		Settings via		ETS software Remote control Bus Smart Remote	
DIMENSIONS		Optimal mounting height		2,8 m		Twilight setting teach		Yes	
Dimensions L x W x H		121 x 94 x 94 mm		CONNECTIVITY		HOUSING & MATERIAL			
ELECTRICAL		Networking		Yes		Protection class (IP)		IP20	
Supply voltage detail		Type of networking		Master/slave		Ambient temperature		from -20 up to 50 °C	
SENSOR TECHNOLOGY		Networking via		KNX bus		Mounting location		ceiling	
Max. mounting height		KNX functions		Photo-cell controller Basic light level function Light level HVAC output Constant-lighting control Light output 2x Presence output Day / night function Logic gate		Application location		Indoors	
Sensor technology		With bus coupler		Yes		Mounting type		In-ceiling installation	
With motion detector		LIGHTING TECHNOLOGY				Material		Plastic	
Detection angle		Soft light start		Yes		Application room		Indoors WC / washroom changing room function room / ancillary room multi-storey / underground car park production facilities reception / lobby recreation room sports hall stairwell warehouse	
Opening angle		Continuous light		selectable		Colour		white	
Sneak-under protection		Constant light regulation		Yes		RAL colour		9003	
Segment-by-segment masking		SETTINGS				SCOPE OF DELIVERY & WARRANTY			
Electronic scalability		Twilight switch		Yes		Manufacturer warranty		5 years	
Mechanical scalability		Twilight setting		2 – 1000 lx		Corner wall bracket included		No	
Radial range		Time setting		0 s – 1092 Min.					
Tangential range		Base light function		Yes					
Switching zones									

IS 3360 KNX - in-ceiling installation, sq. white


PRESENCE DETECTOR

EAN 4007841079642

E-Nr. 535918139

Illustrations

TECHNICAL DRAWINGS

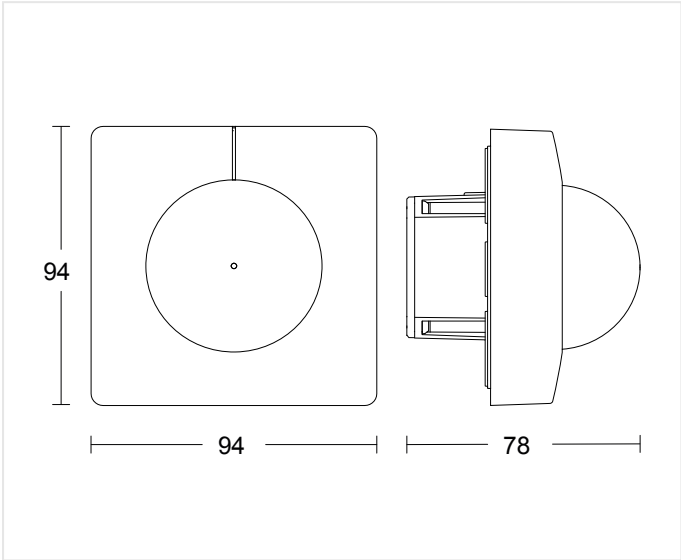

121 x 94 x 94 mm

MOUNTING HEIGHT

2,50 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
---	-------------------------------------	----------------------------------


IS 3360 KNX - in-ceiling installation, sq. white

PRESENCE DETECTOR

EAN 4007841079642
E-Nr. 535918139


Wiring Diagrams

WIRING DIAGRAM 1

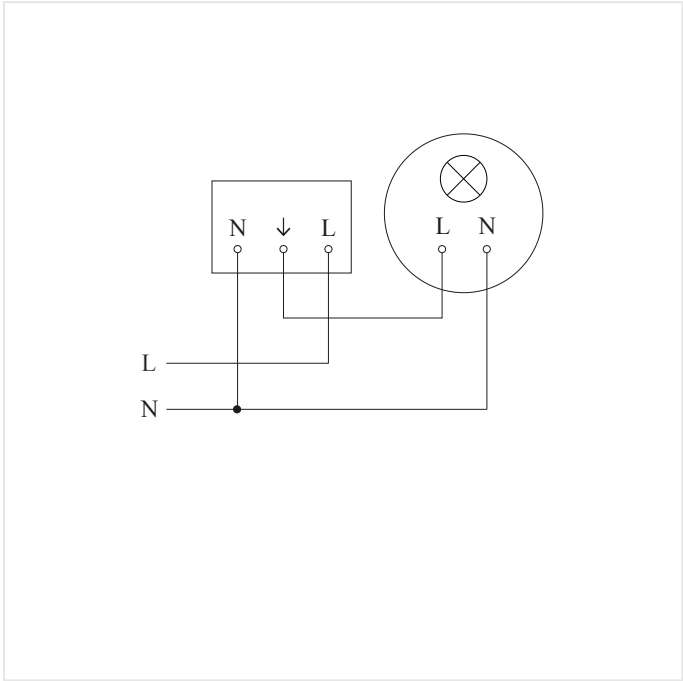

Master circuit diagram

WIRING DIAGRAM 2

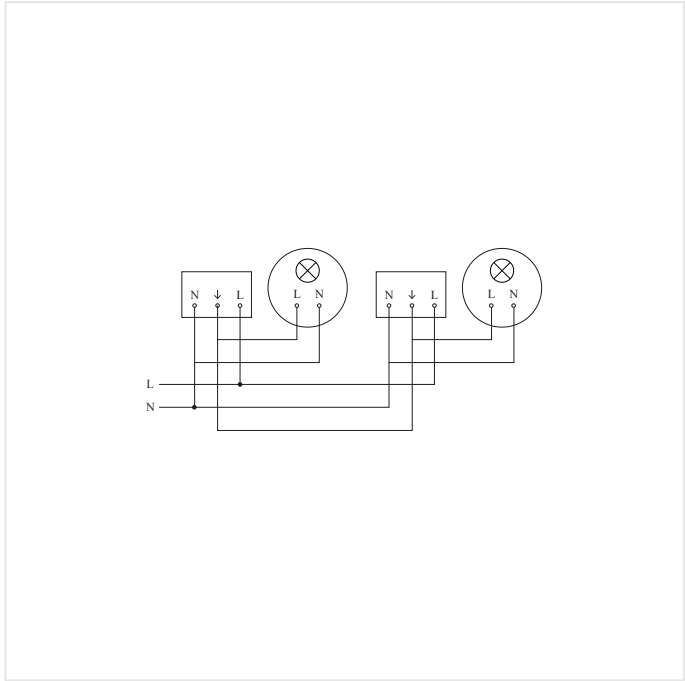

Master/slave interconnection circuit diagram

IS 3360 KNX - in-ceiling installation, sq. white

EAN 4007841079642

E-Nr. 535918139

PRESENCE DETECTOR

Highlights

**UV-resistant plastic****Optional remote controls****Smart Remote remote control optional**

IS 3360 KNX - in-ceiling installation, sq. white

PRESENCE DETECTOR

EAN 4007841079642
E-Nr. 535918139

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841009151	Smart Remote	Accessory
 4007841593018	Service Fernbedienung RC6 KNX	Other
 4007841592912	Nutzer Fernbedienung RC7 KNX	Accessory
 4007841056728	Schwarze Blende für IR-Sensoren Unterputz eckig	Accessory

ORDERING INFORMATION

Art.-Nr.

079642

EAN

4007841079642

E-Number

535918139

Typ

IS 3360 KNX - in-ceiling installation, sq. white

nevalux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss