L 800 SC bugfriendly Anthracite

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN 4007841091361
E-Nr. 941622289

- Outdoor light with motion detector in elegant simple design with high-quality aluminium housing
- Bugfriendly 1800 K amber light – protects insects and reduces light pollution
- Downlight-only: more efficient, bugfriendly and without unnecessary light spill
- Wireless networking via Bluetooth Mesh and easy setting via STEINEL Connect App
- Automatic light thanks to invisibly integrated 160° high-frequency sensor with up to 5 m detection of movement
- Functions: adjustable basic and main light, pleasant soft light start, continuous light
- Incl. mounting accessories - plastic-free packaging

steinel

146 x 230 x 88 mm



L 800 SC bugfriendly Anthracite

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN **4007841091361**
E-Nr. **941622289**

Technical Data

DIMENSIONS

Dimensions L × W × H	**146 x 230 x 88 mm**

ELECTRICAL

Mains connection	**220 – 240 V / 50 – 60 Hz**
Power	**7,7 W**

SENSOR TECHNOLOGY

Max. mounting height	**2,50 m**
Sensor technology	**iHF (intelligent high-frequency technology)**
Transmission power	**< 1 mW**
With motion detector	**Yes**
Detection angle	**160 °**
Sneak-under protection	**No**
Segment-by-segment masking	**No**
Electronic scalability	**Yes**
Mechanical scalability	**No**
Range detail	**Detection zone adjustable on 2 axes**
Radial range	**r = 5 m (35 m²)**
Tangential range	**r = 5 m (35 m²)**
Transmission range	**30 m**
Mounting height	**1,80 – 2,50 m**
Optimal mounting height	**2 m**

CONNECTIVITY

Networking	**No**
Type of networking	**Master/slave Master/master**
Slave mode adjustable	**Yes**
Control technology	**Steinel Connect**
Wireless networking via	**BT SIG Mesh**

LIGHTING TECHNOLOGY

Measured luminous flux 360°	**428 lm**
Efficiency	**56 lm/W**
Colour temperature	**1800 K**
LED colour deviation	**SDCM3**
Colour rendering index	**= 82**
With illuminant	**Yes, STEINEL LED system**
Illuminant	**LED cannot be replaced**
Base	**without**
LED cooling system	**Active and Passive Thermo Control**
Soft light start	**Yes**
Continuous light	**selectable**

LIFETIME

LED lifetime L70B50 25°C	**> 60000 h**
Average rated power supply lifetime at 25 °C	**> 60000 h**

SETTINGS

Twilight switch	**Yes**
Twilight setting	**2 – 2000 lx**
Time setting	**5 s – 60 Min.**
Base light function	**Yes**
Base light function time	**OFF Brightness-controlled 10 sec - 60 min**
Main light adjustable	**10 - 100 %**
Functions	**Motions sensor**
Settings via	**App Bluetooth Mesh**
With remote control	**No**
Twilight setting teach	**Yes**
Base light function in percent	**10 – 100 %**
Base light function percent from	**10 %**

HOUSING & MATERIAL

Impact resistance	**IK03**
Protection class (IP)	**IP44**
Protection class	**II**
Ambient temperature	**from -20 up to 40 °C**
Housing material	**Aluminium**
Cover material	**Plastic, opal**
Mounting location	**wall**
Application location	**Outdoors**
Mounting type	**Surface wiring**
Application room	**all round the building courtyard & driveway front door garden terrace / balcony**
Colour	**Anthracite**

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	**3 years**
House number sheet included	**No**

CERTIFICATES & EPREL

Certificates	**TSU**
EPREL category	**Surrounded product with integrated light source**


L 800 SC bugfriendly Anthracite

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN **4007841091361**
E-Nr. **941622289**

Illustrations

TECHNICAL DRAWINGS

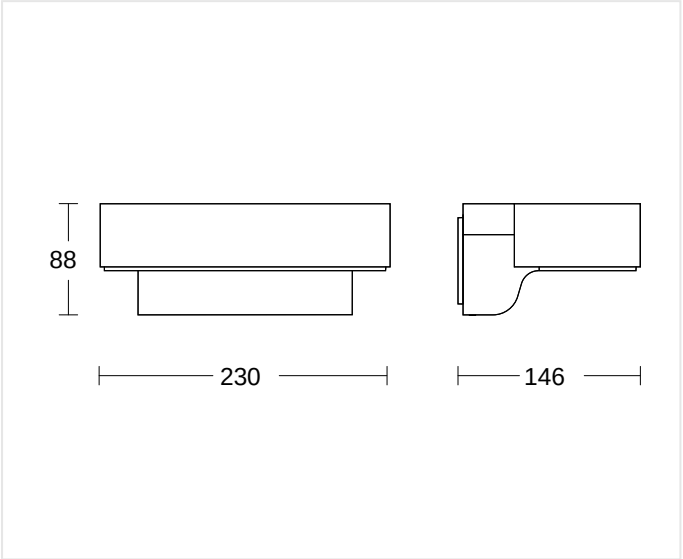

146 x 230 x 88 mm

MOUNTING HEIGHT

1,80 – 2,50 m	2 m	2,50 m
BEREICH	OPTIMAL	MAX


L 800 SC bugfriendly Anthracite

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN **4007841091361**
E-Nr. **941622289**

Wiring Diagrams

WIRING DIAGRAM 1

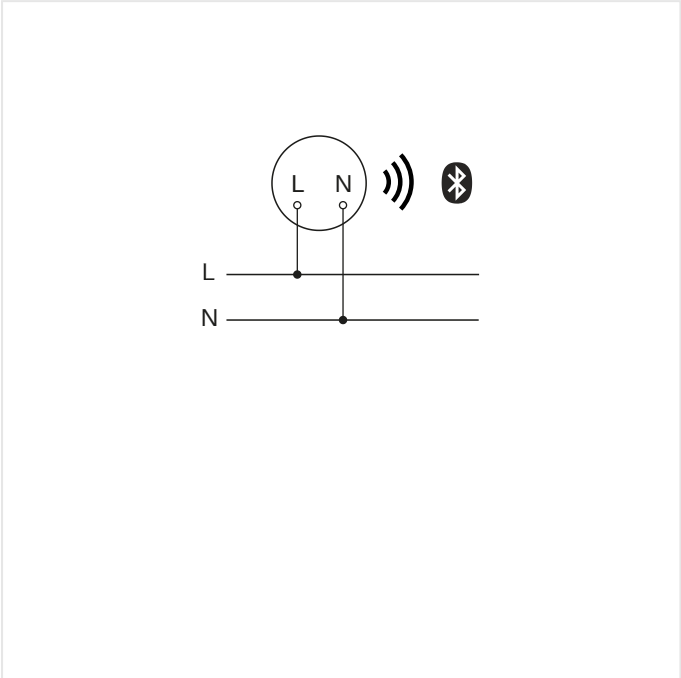

Circuit diagram Bluetooth

L 800 SC bugfriendly Anthracite

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN **4007841091361**
E-Nr. **941622289**

Highlights




Concealed iHF sensor


Intelligent soft light start




Optional basic lighting level 10 - 100 %

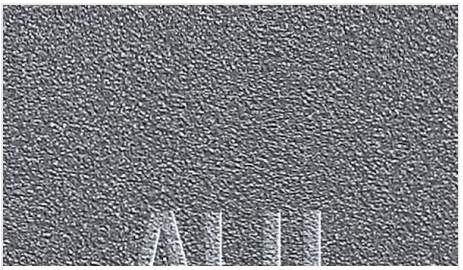

High-quality aluminium

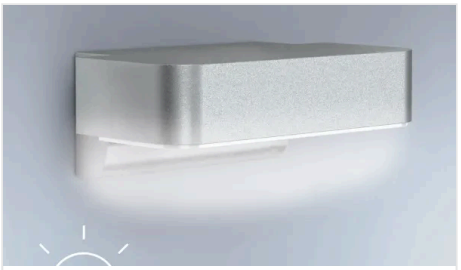

Continuous light individually switchable (optional)

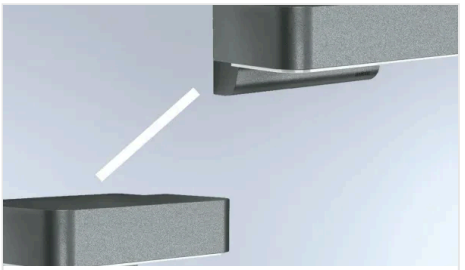

Interconnectable and adjustable via Bluetooth Mesh

L 800 SC bugfriendly Anthracite

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN **4007841091361**
E-Nr. **941622289**

Accessories

ORDERING INFORMATION

Art.-Nr.	091361
EAN	4007841091361
E-Number	941622289
Typ	**L 800 SC bugfriendly Anthracite**

neva lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss