

Dual US KNX - Concealed wiring

PRESENCE DETECTOR

neva
lux

EAN 4007841059491

E-Nr. 535931010

● steinel

70 x 120 x 120 mm



Dual US KNX - Concealed wiring

PRESENCE DETECTOR

EAN 4007841059491
E-Nr. 535931010

Technical Data

IDENTIFICATION					
Version	Presence detector	Mounting height	2,50 – 3,5 m	Base light function	Yes
DIMENSIONS		US technology	40 kHz	Base light function time	1-255 min
Dimensions L x W x H	70 x 120 x 120 mm	Optimal mounting height	2,8 m	Main light adjustable	0 - 100 %
ELECTRICAL		CONNECTIVITY		Settings via	ETS software Remote control Bus Smart Remote
Mains connection	30 V	Networking	Yes	With remote control	No
Own consumption	0,7 W	Type of networking	Master/master Master/slave	Twilight setting teach	Yes
Supply voltage detail	KNX bus	Networking via	KNX bus	HOUSING & MATERIAL	
SENSOR TECHNOLOGY		KNX functions	Photo-cell controller Basic light level function Light level HVAC output Constant- lighting control Light output 4x Presence output Day / night function Logic gate	Protection class (IP)	IP20
Max. mounting height	3,50 m	With bus coupler	Yes	Ambient temperature	from -25 up to 55 °C
Sensor technology	Ultrasonic	LIGHTING TECHNOLOGY		Mounting location	ceiling
With motion detector	Yes	Soft light start	Yes	Application location	Indoors
Detection angle	360 °	Continuous light	selectable	Mounting type	Concealed wiring
Opening angle	180 °	Constant light regulation	Yes	Material	Plastic
Sneak-under protection	Yes	SETTINGS		Application room	Indoors corridor / aisle
Segment-by-segment masking	No	Twilight switch	Yes	Colour	white
Electronic scalability	Yes	Twilight setting	10 – 1000 lx	RAL colour	9010
Mechanical scalability	No	Time setting	10 s – 1092 Min.	SCOPE OF DELIVERY & WARRANTY	
Radial range	18 x 3 m (54 m²)			Manufacturer warranty	5 years
Tangential range	18 x 3 m (54 m²)			Corner wall bracket included	No


Dual US KNX - Concealed wiring

PRESENCE DETECTOR

EAN 4007841059491
E-Nr. 535931010

Illustrations

TECHNICAL DRAWINGS

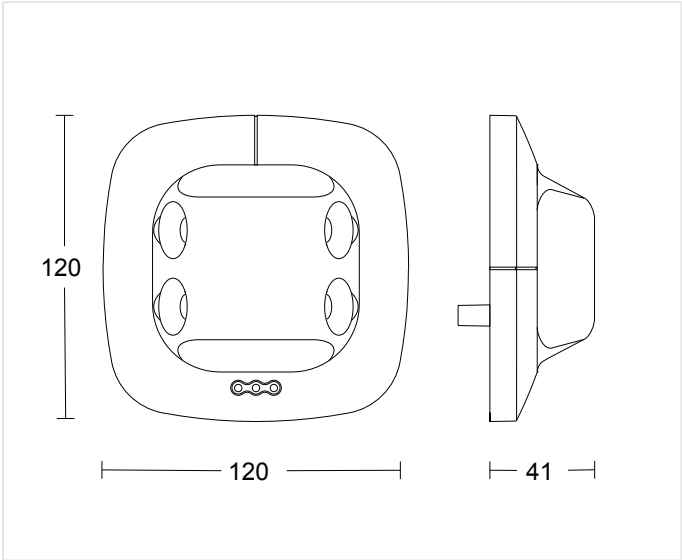

70 x 120 x 120 mm

MOUNTING HEIGHT

2,50 – 3,5 m BEREICH	2,8 m OPTIMAL	3,50 m MAX
-------------------------	------------------	---------------

Dual US KNX - Concealed wiring

PRESENCE DETECTOR


EAN 4007841059491

E-Nr. 535931010


Highlights



Optional remote controls

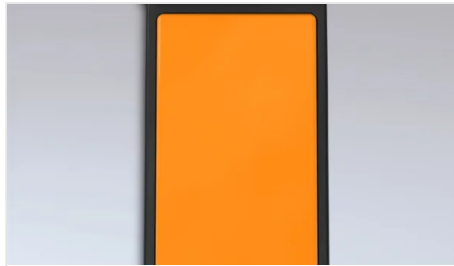

Smart Remote remote control optional

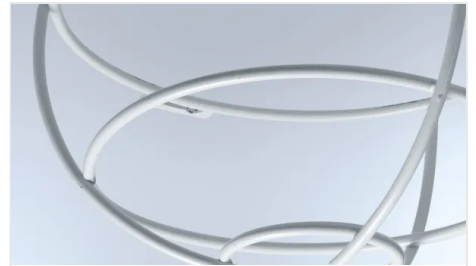

Optional guard cage

Dual US KNX - Concealed wiring

PRESENCE DETECTOR

EAN 4007841059491
E-Nr. 535931010

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841000363	Aufputz-Adapter Control Pro IP54 weiss	Accessory
 4007841003036	Control PRO Schutzkorb	Accessory
 4007841009151	Smart Remote	Accessory
 4007841593018	Service Fernbedienung RC6 KNX	Other
 4007841592912	Nutzer Fernbedienung RC7 KNX	Accessory

ORDERING INFORMATION

Art.-Nr.

059491

EAN

4007841059491

E-Number

535931010

Typ

Dual US KNX - Concealed wiring

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss