nefera S 4K

STEHLEUCHTE DIREKT/INDIREKT

Product code **220170**

- Version: Master

610 x 310 x 1950 mm



nefera S 4K

STEHLEUCHTE DIREKT/INDIREKT

Product code **220170**

Technical Data

DIMENSIONS

Dimensions L × W × H	**610 x 310 x 1950 mm**

ELECTRICAL

Mains connection	**200…240 V / 50 – 60 Hz**
Power	**80 W**

SENSOR TECHNOLOGY

Sensor technology	**Passiv Infrarot**
With motion detector	**Yes**
Detection angle	**360°**
Presence range	**Ø 3 m**
With light sensor	**Yes**

CONNECTIVITY

Control technology	**Einfache Sensor-Ausführung**

LIGHTING TECHNOLOGY

Colour temperature	**4000 K**
LED colour deviation	**SDCM3**
Colour rendering index	**80-89**
Illuminant	**LED**
Luminous flux	**8000 lm (Down 4000, Up 4000)**
Beam angle	**Down 90°, Up 110°**
Luminaire luminous efficacy	**100 lm/W**
Glare value	**UGR < 19**

LIFETIME

LED lifespan (25 °C)	**50000 h**

SETTINGS

Direct/indirect ratio separately controllable	**No**
With switch	**Yes**

HOUSING & MATERIAL

Protection class (IP)	**IP20**
Protection class	**II**
Ambient temperature	**-20…45 °C**
Housing material	**Aluminium**
Cover material	**Microprismatic acrylic glass**
Mounting type	**Stand Boden**
Colour	**white**

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	**5 years**


nefera S 4K

STEHLEUCHTE DIREKT/INDIREKT

Product code **220170**

Illustrations

TECHNICAL DRAWINGS

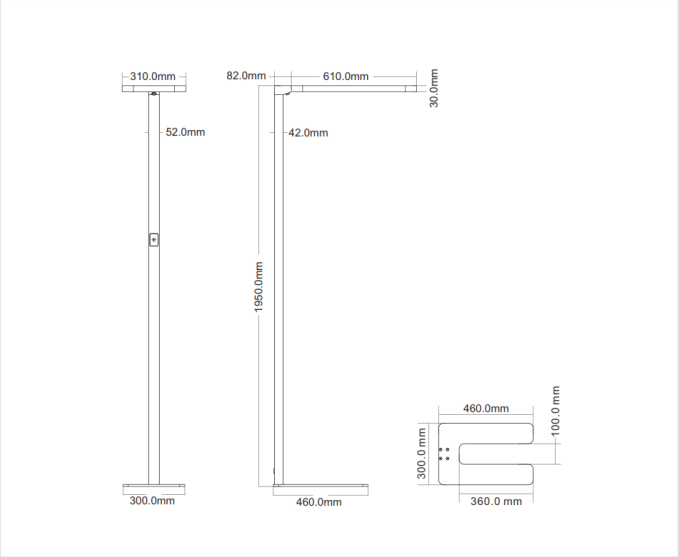

610 x 310 x 1950 mm

nefera S 4K

STEHLEUCHTE DIREKT/INDIREKT

Product code **220170**

Accessories

	ARTICLE NUMBER	DESCRIPTION	CATEGORY
	220173	**nefera C120 4K**	Ceiling luminaire direct/indirect
	220172	**nefera C60 4K**	Ceiling luminaire direct/indirect
	220171	**nefera P 4K**	Pendant luminaire direct/indirect
	220560	**nefera W60 4K**	Wall luminaire direct/indirect

ORDERING INFORMATION

Art.-Nr.	220170
Typ	**nefera S 4K**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss