L 620 CAM SC Anthracite

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN 4007841065829
E-Nr. 941200649

- High-quality aluminium
- Micro SD card (16 GB included)
- Integrated intercom unit
- Communication via smartphone
- High-precision sensor
- 1080p Full HD wide-angle colour camera, 180° swiveling
- Optional basic lighting level 0 - 40%
- Adjustable main light brightness (30 - 100%)

131 x 78 x 305 mm



L 620 CAM SC Anthracite

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN **4007841065829**
E-Nr. **941200649**

Technical Data

DIMENSIONS

Dimensions L × W × H	**131 x 78 x 305 mm**

ELECTRICAL

Mains connection	**220 – 240 V / 50 – 60 Hz**
Power	**14 W**

SENSOR TECHNOLOGY

Max. mounting height	**2,00 m**
Sensor technology	**Passiv Infrarot**
With motion detector	**Yes**
Opening angle	**45 °**
Sneak-under protection	**No**
Segment-by-segment masking	**No**
Electronic scalability	**Yes**
Mechanical scalability	**No**
Radial range	**r = 2 m (6 m²)**
Tangential range	**r = 10 m (157 m²)**
Mounting height	**1,80 – 2,00 m**
Optimal mounting height	**2 m**

CONNECTIVITY

Control technology	**On/Off-Leuchte**

LIGHTING TECHNOLOGY

Measured luminous flux 360°	**925 lm**
Efficiency	**67 lm/W**
Colour temperature	**3000 K**
Colour rendering index	**= 80**
With illuminant	**Ja, STEINEL LED-System**
Illuminant	**LED nicht austauschbar**
Base	**Ohne**
LED cooling system	**Passive Thermo Control**
Soft light start	**No**
Continuous light	**schaltbar**

LIFETIME

LED lifetime L70B50 25°C	**> 36000 Std**
Average rated power supply lifetime at 25 °C	**> 36000 Std**

SETTINGS

Twilight switch	**Ja**
Twilight setting	**10 – 10000 lx**
Time setting	**60 s – 15 Min.**
Base light function	**Ja**
Main light adjustable	**30 - 100 %**
Functions	**BewegungssensorGegensprechanlageKamera**
Settings via	**WLAN**
With remote control	**No**
Twilight setting teach	**No**
Base light function in percent	**0 %**
Base light function percent from	**0**

HOUSING & MATERIAL

Impact resistance	**IK03**
Protection class (IP)	**IP44**
Protection class	**I**
Ambient temperature	**von -10 bis 40 °C**
Housing material	**Aluminium**
Cover material	**Glas opal**
Mounting location	**Wand**
Application location	**Aussenbereich**
Mounting type	**Aufputz**
Material	**Aluminium**
Application room	**AufenthaltsraumHauseingangHof & Einfahrt**
Colour	**Anthrazit**

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	**3 Jahre**
House number sheet included	**No**

CERTIFICATES & EPREL

EPREL category	**Umgebenes Produkt mit integrierter Lichtquelle**


L 620 CAM SC Anthracite

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN **4007841065829**
E-Nr. **941200649**

Illustrations

TECHNICAL DRAWINGS

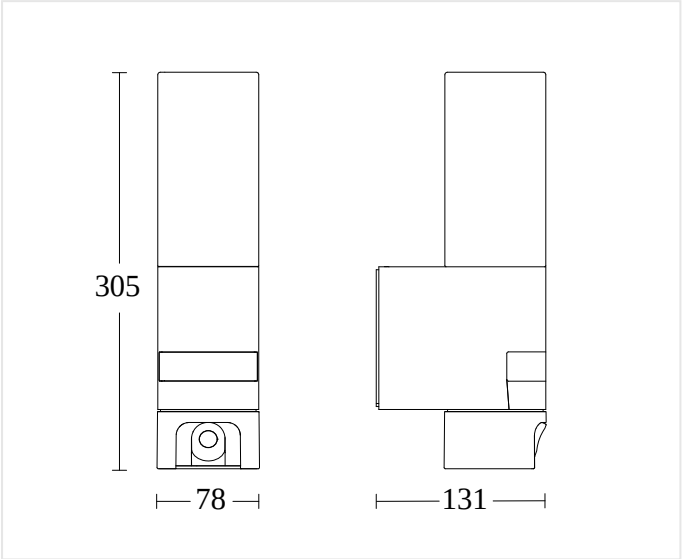

131 x 78 x 305 mm

MOUNTING HEIGHT

1,80 – 2,00 m	2 m	2,00 m
BEREICH	OPTIMAL	MAX


L 620 CAM SC Anthracite

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN **4007841065829**
E-Nr. **941200649**


Wiring Diagrams

WIRING DIAGRAM 1

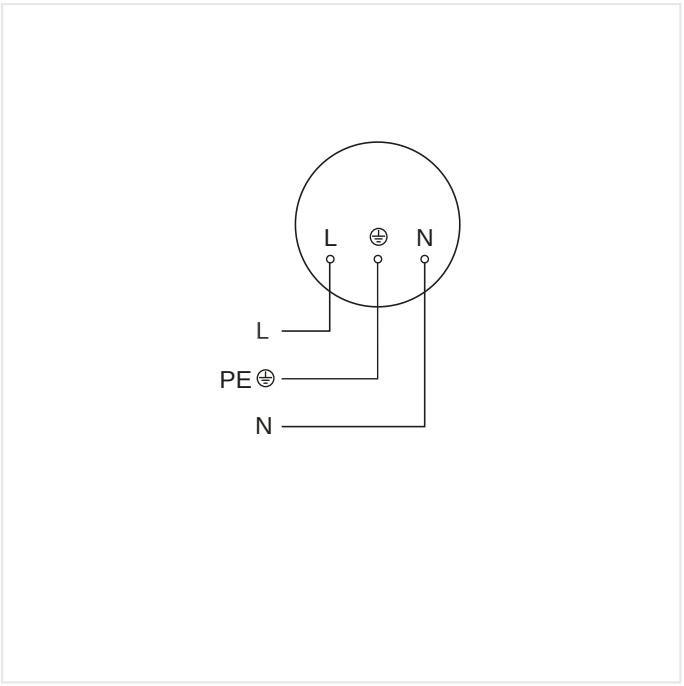

Master circuit diagram

WIRING DIAGRAM 2

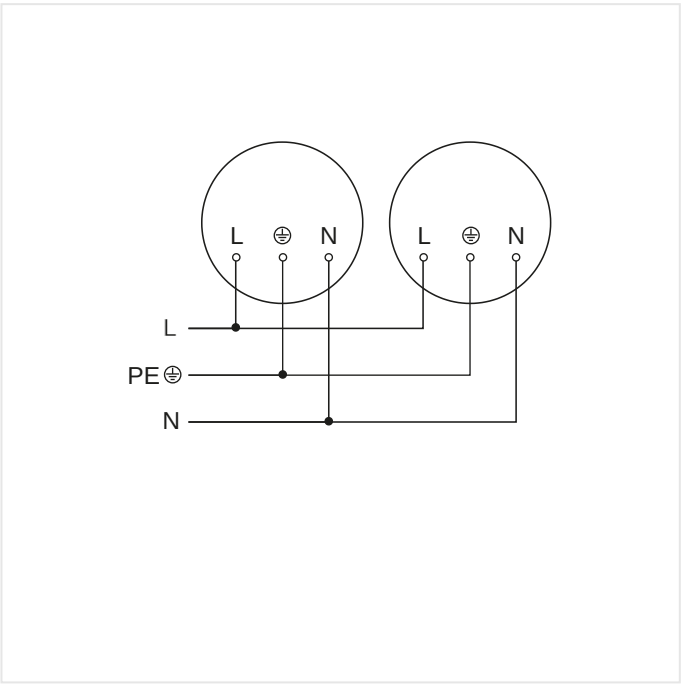

Master/slave interconnection circuit diagram

L 620 CAM SC Anthracite

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN **4007841065829**
E-Nr. **941200649**

Accessories

ORDERING INFORMATION

Art.-Nr.	4007841065829
EAN	4007841065829
E-Number	941200649
Typ	**L 620 CAM SC Anthracite**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss