True Presence DALI-2 Input Device - concealed

PRESENCE DETECTOR

EAN 4007841064495
E-Nr. 535903073

steinel



True Presence DALI-2 Input Device - concealed

PRESENCE DETECTOR

EAN 4007841064495
E-Nr. 535903073

Technical Data

IDENTIFICATION

Variant	DALI-2 Input Device
Version	Presence detector

ELECTRICAL

Mains connection	230 V / 50 – 60 Hz
Control output DALI	Addressable / slave

SENSOR TECHNOLOGY

Max. mounting height	12,00 m
Sensor technology	High frequency
Transmission power	< 1 mW
HF technology	7,2 GHz
With motion detector	Yes
Detection angle	360 °
Opening angle	160 °
Sneak-under protection	Yes
Segment-by-segment masking	No
Electronic scalability	Yes
Mechanical scalability	No
Radial range	Ø 15 m (177 m²)
Tangential range	Ø 15 m (177 m²)
Mounting height	2,0 – 12,0 m
Presence range	Ø 15 m (177 m²)
True Presence range	Ø 9 m (64 m²)
Optimal mounting height	2,8 m

CONNECTIVITY

Networking	Yes
Number of DALI participants	1
With bus coupler	Yes
Control technology	Steinel Connect
Wireless networking via	BT Open Mesh
Networking via	DALI 2

LIGHTING TECHNOLOGY

Soft light start	No
Continuous light	selectable
Constant light regulation	No

SETTINGS

Twilight switch	Yes
Twilight setting	2 – 2000 lx
Base light function	No
Main light adjustable	No
Settings via	App, Smartphone, Tablet, Bus
With remote control	No
Twilight setting teach	No

HOUSING & MATERIAL

Protection class (IP)	IP20
Ambient temperature	-20...+50 °C
Mounting location	ceiling
Application location	Indoors
Mounting type	Concealed mounting
Material	Plastic
Application room	Indoors, WC / washroom, care room, changing room, classroom, conference room / meeting room, dining hall / staff restaurant, duty room, high-bay warehouse, hotel room, kitchenette, lecture hall, one-person office, open-plan office, production facilities, reception / lobby, recreation room, sports hall, warehouse
Colour	White
RAL colour	9003

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	5 years
Corner wall bracket included	No

CERTIFICATES & EPREL

Certificates	DALI-2


True Presence DALI-2 Input Device - concealed

PRESENCE DETECTOR

EAN **4007841064495**
E-Nr. **535903073**

Illustrations

TECHNICAL DRAWINGS

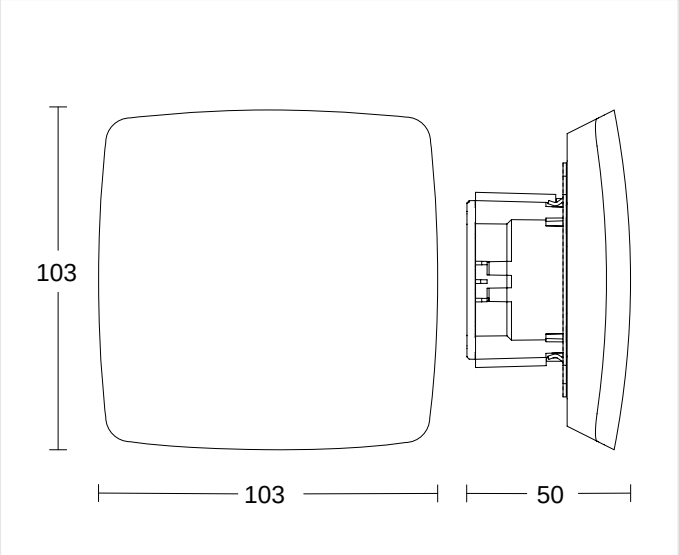

MOUNTING HEIGHT

2,0 – 12,0 m	2,8 m	12,00 m
BEREICH	OPTIMAL	MAX


True Presence DALI-2 Input Device - concealed

PRESENCE DETECTOR

EAN 4007841064495
E-Nr. 535903073

Wiring Diagrams

WIRING DIAGRAM 1

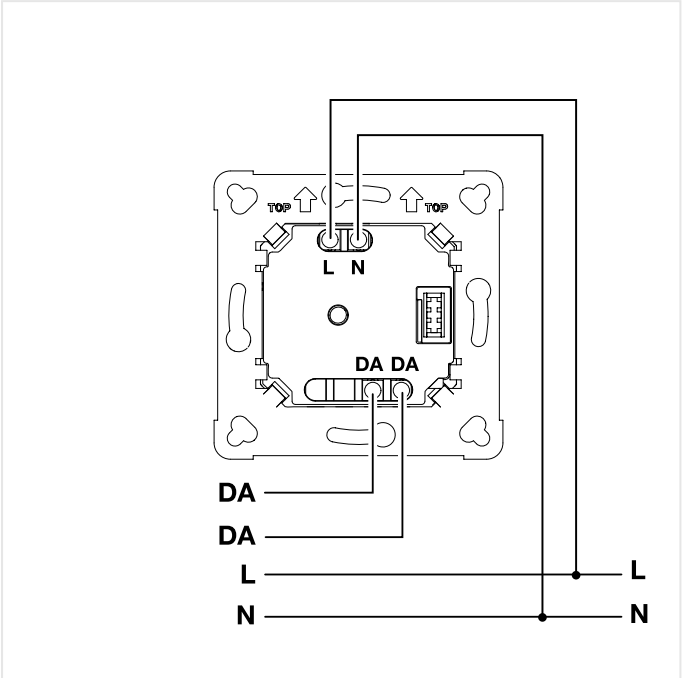

Circuit diagram for interconnecting DALI-2 APC with DALI-2 IPD

True Presence DALI-2 Input Device - concealed


PRESENCE DETECTOR

EAN 4007841064495
E-Nr. 535903073

Highlights



UV-resistant plastic

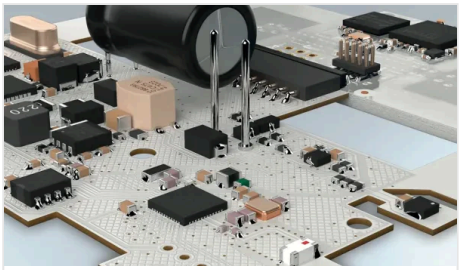

Digital high frequency sensor

True Presence DALI-2 Input Device - concealed

PRESENCE DETECTOR

EAN 4007841064495
E-Nr. 535903073

Accessories

ORDERING INFORMATION

Art.-Nr.	064495
EAN	4007841064495
E-Number	535903073
Typ	**True Presence DALI-2 Input Device - concealed**

neva lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss