

Relais REL5A-DALI-2

SYSTEM COMPONENTS

neva
lux

EAN 4007841082109

- Integration into DALI-2 installations
- For controlling loads with 230 V AC mains voltage, such as conventional lights without DALI, e.g. panel lights
- Switching of up to 300 W LED
- Compatible with all sensors of the DALI-APC interface of each series
- Simple installation in standard flush-mounted boxes



20 x 46 x 45 mm



Relais REL5A-DALI-2

SYSTEM COMPONENTS

EAN 4007841082109

Technical Data

IDENTIFICATION					
Version	Other	Sneak-under protection	No	Functions	Relay output
Type of accessory	Other	Segment-by-segment masking	No	Settings via	App Bus
DIMENSIONS		Mechanical scalability	No	With remote control	No
Dimensions L x W x H	20 x 46 x 45 mm	CONNECTIVITY		Twilight setting teach	No
ELECTRICAL		Number of DALI participants	1	HOUSING & MATERIAL	
Mains connection	220 – 240 V / 50 – 60 Hz	With bus coupler	No	Protection class (IP)	IP20
Switching output 1 resistive	1000 W	LIGHTING TECHNOLOGY		Ambient temperature	from -20 up to 50 °C
LED lamps > 8 W	300 W	Soft light start	No	Mounting type	Concealed wiring
Capacitive load in µF	176 µF	Constant light regulation	No	Colour	white
Switching output 1 number of LED/fluorescent lamps	50 pcs.	SETTINGS		SCOPE OF DELIVERY & WARRANTY	
SENSOR TECHNOLOGY		Twilight switch	No	Manufacturer warranty	5 years
With motion detector	No	Base light function	No	Corner wall bracket included	No
		Main light adjustable	No	CERTIFICATES & EPREL	
				Certificates	DALI-2 TÜV


Relais REL5A-DALI-2

EAN 4007841082109

SYSTEM COMPONENTS

Illustrations

TECHNICAL DRAWINGS

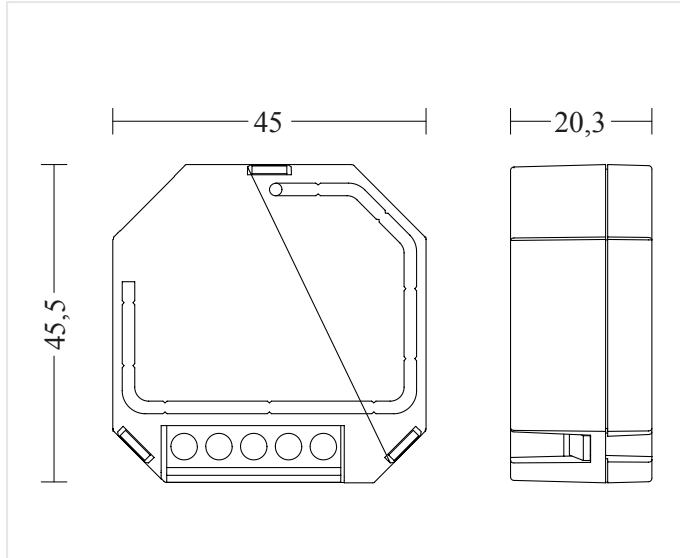

20 x 46 x 45 mm


Relais REL5A-DALI-2

EAN 4007841082109

SYSTEM COMPONENTS

Wiring Diagrams

WIRING DIAGRAM 1

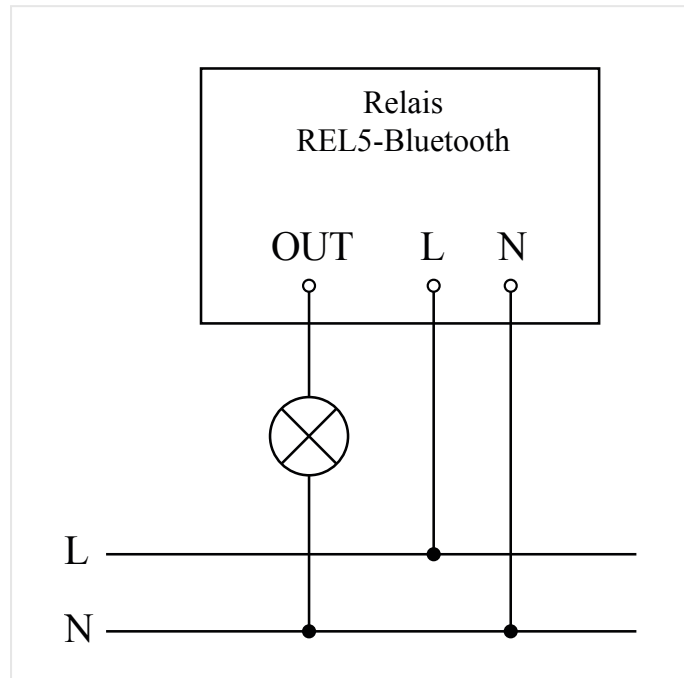

Relais REL5A-DALI-2

EAN 4007841082109

SYSTEM COMPONENTS

Accessories

ORDERING INFORMATION

Art.-Nr.	082109
EAN	4007841082109
Typ	Relais REL5A-DALI-2

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss