

LuxMaster Hallway DALI-2 APC - concealed

neva
lux

PRESENCE DETECTOR

EAN 4007841086305

E-Nr. 535903118

- High-frequency corridor presence detector with square 360° detection
- Ideal for long corridors and hallways
- Range, individually digitally adjustable in two directions
- Setting Networking via Bluetooth
- Measurement of presence and brightness
- DALI addressing of up to 64 participants in max. 4 groups
- Operating modes: fully and semi-automatic, light sensor operation, night-time economy mode
- Time-based control with time- and day-dependent light profiles
- Flexible system expansion possible with system components

 **steinel**

67 x 103 x 103 mm



LuxMaster Hallway DALI-2 APC - concealed

PRESENCE DETECTOR

EAN 4007841086305

E-Nr. 535903118

Technical Data

IDENTIFICATION	
Version	Presence detector
DIMENSIONS	
Dimensions L x W x H	67 x 103 x 103 mm
ELECTRICAL	
Mains connection	220 – 240 V / 50 – 60 Hz
Supply voltage detail	max. 64 users
Control output DALI	Addressable / broadcast 64 electronic ballasts
SENSOR TECHNOLOGY	
Max. mounting height	4,00 m
Sensor technology	High frequency
Transmission power	< 1 mW
HF technology	5,8 GHz
With motion detector	Yes
Detection	also through glass, wood and stud walls
Detection angle	360 °
Opening angle	160 °
Sneak-under protection	Yes
Segment-by-segment masking	No
Electronic scalability	Yes
Mechanical scalability	No

Radial range	25 x 3 m (75 m²)
Tangential range	25 x 3 m (75 m²)
Mounting height	2 – 4 m
Optimal mounting height	2,8 m
CONNECTIVITY	
Networking	Yes
Networking via	Bluetooth Mesh
LIGHTING TECHNOLOGY	
Soft light start	Yes
Continuous light	selectable
Constant light regulation	Yes
SETTINGS	
Twilight switch	Yes
Twilight setting	2 – 2000 lx
Time setting	10 s – 60 Min.
Base light function	Yes
Base light function time	10 min, all day all night
Main light adjustable	Yes
Functions	Semi-/fully automatic Constant-lighting control Lighting scenario Master/slave override Neighbouring group function TouchDIM function Multizone Foldingdoor function

Settings via	Bluetooth Mesh
With remote control	No
Twilight setting teach	Yes
Base light function in percent	10 – 90 %
Base light function percent from	10 %
HOUSING & MATERIAL	
Protection class (IP)	IP20
Ambient temperature	from -20 up to 50 °C
Mounting location	ceiling
Application location	Indoors
Mounting type	Concealed wiring
Material	Plastic
Application room	Indoors corridor / aisle
Colour	white
RAL colour	9003
SCOPE OF DELIVERY & WARRANTY	
Manufacturer warranty	5 years
Corner wall bracket included	No
CERTIFICATES & EPREL	
Certificates	DALI-2

LuxMaster Hallway DALI-2 APC - concealed


PRESENCE DETECTOR

EAN 4007841086305

E-Nr. 535903118

Illustrations

TECHNICAL DRAWINGS

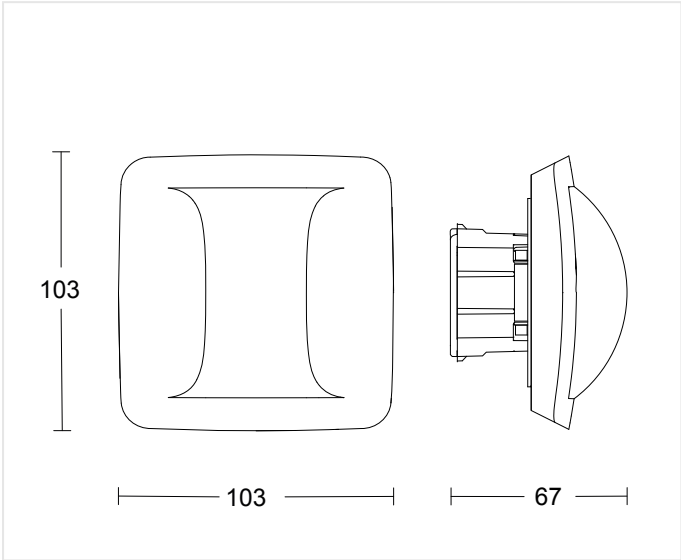

67 x 103 x 103 mm

MOUNTING HEIGHT

2 – 4 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
---------------------------------------	-------------------------------------	----------------------------------

LuxMaster Hallway DALI-2 APC - concealed


PRESENCE DETECTOR

EAN 4007841086305

E-Nr. 535903118


Wiring Diagrams

WIRING DIAGRAM 1

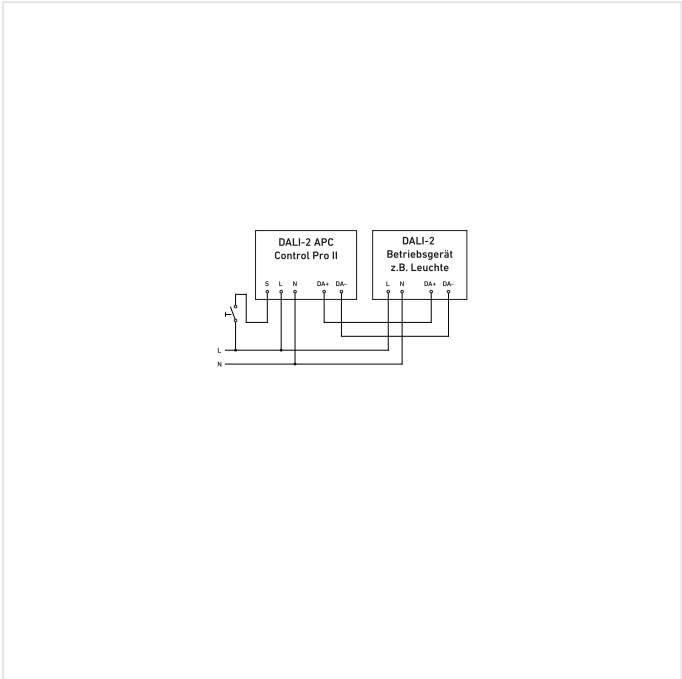

Master circuit diagram

WIRING DIAGRAM 2

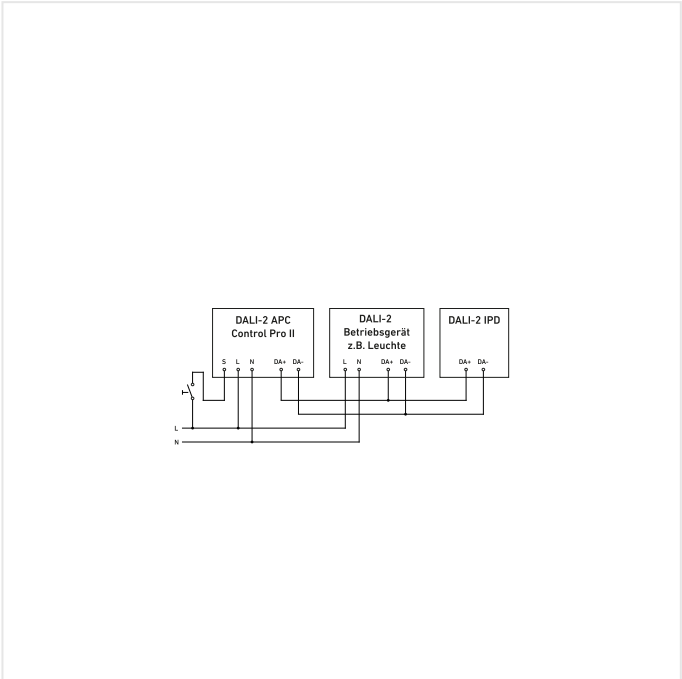

Master/slave interconnection circuit diagram

LuxMaster Hallway DALI-2 APC - concealed

PRESENCE DETECTOR

EAN 4007841086305

E-Nr. 535903118

Highlights



UV-resistant plastic

LuxMaster Hallway DALI-2 APC - concealed

PRESENCE DETECTOR

EAN 4007841086305

E-Nr. 535903118

Accessories

ORDERING INFORMATION	
Art.-Nr.	086305
EAN	4007841086305
E-Number	535903118
Typ	LuxMaster Hallway DALI-2 APC - concealed

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss