

IR Quattro HD-2 24m BT IPD - concealed

neva
lux

PRESENCE DETECTOR

EAN 4007841064396

E-Nr. 535900034

- Passive infrared presence detector with square 360° detection
- 5.200 switching zones for the finest detection
- Offers the largest detection range in our IR range
- 4 pyro sensors individually de-/activatable
- Sensitivity digitally adjustable
- Measures presence and brightness
- Temperature and humidity measurement with IP, KNX and DALI-2 IPD
- Setting and networking via Bluetooth
- Ideal for open-plan offices and classrooms

 **steinel**

69 x 103 x 103 mm



IR Quattro HD-2 24m BT IPD - concealed

PRESENCE DETECTOR

EAN 4007841064396

E-Nr. 535900034

Technical Data

IDENTIFICATION	
Version	Presence detector
DIMENSIONS	
Dimensions L x W x H	69 x 103 x 103 mm
ELECTRICAL	
Mains connection	220 – 240 V / 50 – 60 Hz
Own consumption	0,3 W
SENSOR TECHNOLOGY	
Max. mounting height	10,00 m
Sensor technology	passive infrared
Detection angle	360 °
Opening angle	160 °
Sneak-under protection	Yes
Segment-by-segment masking	Yes
Electronic scalability	Yes
Mechanical scalability	Yes
Radial range	9 x 9 m (81 m²)
Tangential range	24 x 24 m (576 m²)
Switching zones	5200 switching zones

Mounting height	2,50 – 10,00 m
Presence range	9 x 9 m (81 m²)
Optimal mounting height	2,8 m
CONNECTIVITY	
Networking	Yes
Networking via	Bluetooth Mesh
LIGHTING TECHNOLOGY	
Soft light start	No
Continuous light	selectable
Constant light regulation	No
SETTINGS	
Twilight switch	Yes
Twilight setting	2 – 2000 lx
Time setting	5 s – 60 Min.
Base light function	No
Main light adjustable	No
Settings via	Bluetooth
With remote control	No
Twilight setting teach	No

HOUSING & MATERIAL	
Protection class (IP)	IP20
Ambient temperature	from -20 up to 50 °C
Mounting location	ceiling
Application location	Indoors
Mounting type	Concealed wiring
Material	Plastic
Application room	Indoors changing room classroom conference room / meeting room dining hall / staff restaurant duty room high-bay warehouse lecture hall multi-storey / underground car park open- plan office production facilities reception / lobby recreation room sports hall
Colour	white
RAL colour	9003
SCOPE OF DELIVERY & WARRANTY	
Manufacturer warranty	5 years
Corner wall bracket included	No


IR Quattro HD-2 24m BT IPD - concealed

PRESENCE DETECTOR

EAN 4007841064396
E-Nr. 535900034

Illustrations

TECHNICAL DRAWINGS

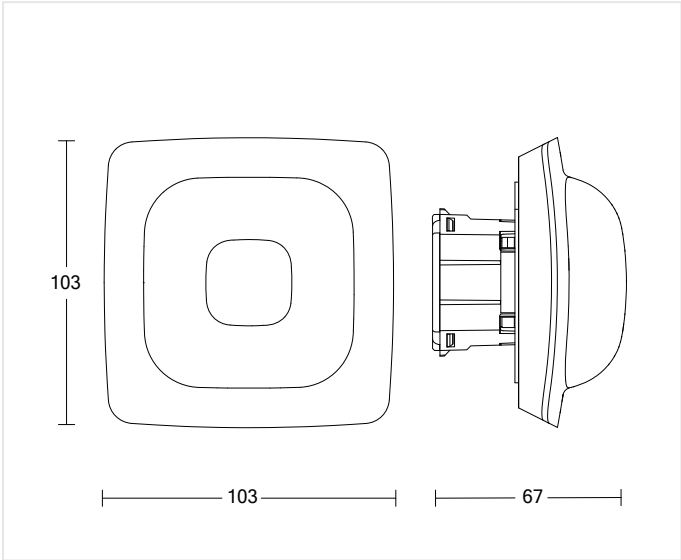

69 x 103 x 103 mm

MOUNTING HEIGHT

2,50 – 10,00 m BEREICH	2,8 m OPTIMAL	10,00 m MAX
---------------------------	------------------	----------------

IR Quattro HD-2 24m BT IPD - concealed


PRESENCE DETECTOR

EAN 4007841064396

E-Nr. 535900034

Wiring Diagrams

WIRING DIAGRAM 1

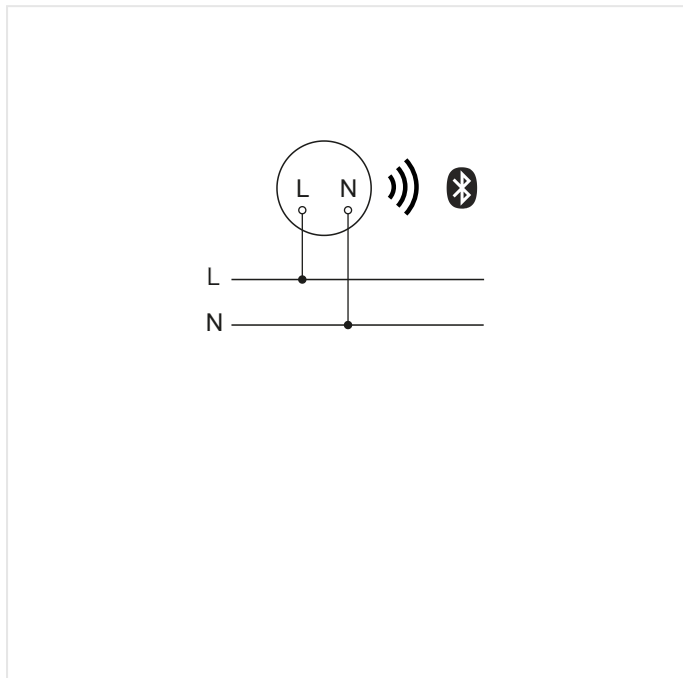

Circuit diagram

IR Quattro HD-2 24m BT IPD - concealed

PRESENCE DETECTOR

EAN 4007841064396

E-Nr. 535900034

Highlights



UV-resistant plastic

IR Quattro HD-2 24m BT IPD - concealed

PRESENCE DETECTOR

EAN 4007841064396
E-Nr. 535900034

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841067335	Relais REL5A-Bluetooth	System components
 4007841067342	Tasterkoppler PC4-Bluetooth	System components

ORDERING INFORMATION

Art.-Nr.

064396

EAN

4007841064396

E-Number

535900034

Typ

IR Quattro HD-2 24m BT IPD - concealed

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss